


# SLOVENSKI STANDARD SIST ISO 19125-1:2005

01-februar-2005



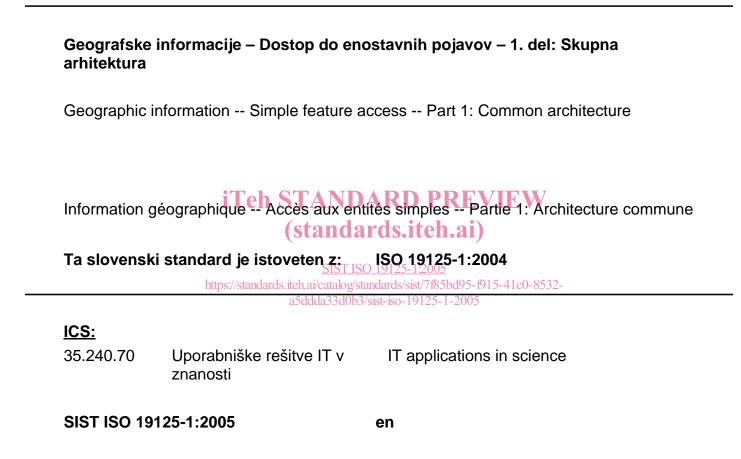

# iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ISO 19125-1:2005 https://standards.iteh.ai/catalog/standards/sist/7f85bd95-f915-41c0-8532a5ddda33d0b3/sist-iso-19125-1-2005

# INTERNATIONAL STANDARD

ISO 19125-1

First edition 2004-08-01

# Geographic information — Simple feature access —

Part 1: Common architecture

iTeh STANDARE Accès aux entités simples — Partie 1: Architecture commune (standards.iteh.ai)

SIST ISO 19125-1:2005 https://standards.iteh.ai/catalog/standards/sist/7f85bd95-f915-41c0-8532a5ddda33d0b3/sist-iso-19125-1-2005



Reference number ISO 19125-1:2004(E)

#### PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

# iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>SIST ISO 19125-1:2005</u> https://standards.iteh.ai/catalog/standards/sist/7f85bd95-f915-41c0-8532a5ddda33d0b3/sist-iso-19125-1-2005

© ISO 2004

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Case postale 56 • CH-1211 Geneva 20 Tel. + 41 22 749 01 11 Fax + 41 22 749 09 47 E-mail copyright@iso.org Web www.iso.org Published in Switzerland

## Contents

Forewo	ord	iv
Introdu	uction	v
1	Scope	1
2	Conformance	1
3	Normative references	1
4	Terms and definitions	1
5	Abbreviated terms	4
6 6.1	Architecture Geometry object model	5
6.2	Well-known Text Representation for Geometry	21
6.3 6.4	Well-known Binary Representation for Geometry Well-known Text Representation of Spatial Reference Systems	
Annex	A (informative) The correspondence of concepts of the common architecture with concepts of the geometry model of ISO 19107	28
Annex	B (informative) Supported spatial reference data	36
Bibliog	graphy (standards.iteh.ai)	42

<u>SIST ISO 19125-1:2005</u> https://standards.iteh.ai/catalog/standards/sist/7f85bd95-f915-41c0-8532a5ddda33d0b3/sist-iso-19125-1-2005

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 19125-1 was prepared by Technical Committee ISO/TC 211, *Geographic information/Geomatics* from a base document supplied by the Open GIS Consortium, Inc.

ISO 19125 consists of the following parts, under the general title *Geographic information* — *Simple feature* access: (standards.iteh.ai)

- Part 1: Common architecture
- Part 2: SQL option https://st

<u>SIST ISO 19125-1:2005</u> https://standards.iteh.ai/catalog/standards/sist/7f85bd95-f915-41c0-8532a5ddda33d0b3/sist-iso-19125-1-2005

A Part 3: COM/OLE option is under preparation.

### Introduction

This part of ISO 19125 describes the common architecture for simple feature geometry. The simple feature geometry object model is Distributed Computing Platform neutral and uses UML notation. The base Geometry class has subclasses for Point, Curve, Surface and GeometryCollection. Each geometric object is associated with a Spatial Reference System, which describes the coordinate space in which the geometric object is defined.

The extended Geometry model has specialized 0, 1 and 2-dimensional collection classes named MultiPoint, MultiLineString and MultiPolygon for modelling geometries corresponding to collections of Points, LineStrings and Polygons, respectively. MultiCurve and MultiSurface are introduced as abstract superclasses that generalize the collection interfaces to handle Curves and Surfaces.

The attributes, methods and assertions for each Geometry class are described in Figure 1 in 6.1.1. In describing methods, *this* is used to refer to the receiver of the method (the object being messaged).

The SFA COM function "signatures" may use a different notation from SFA SQL. COM notation is more familiar for COM programmers. However, UML notation is used throughout this part of ISO 19125. There may also be methods used in this International Standard that differ from one part to another. Where this is the case, the differences are shown within the part.

This part of ISO 19125 implements a profile of the spatial schema described in ISO 19107:2003, *Geographic information* — Spatial schema. Annex A provides a detailed mapping of the schema in this part of ISO 19125 with the schema described in ISO 19107:2003.

<u>SIST ISO 19125-1:2005</u> https://standards.iteh.ai/catalog/standards/sist/7f85bd95-f915-41c0-8532a5ddda33d0b3/sist-iso-19125-1-2005



# iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ISO 19125-1:2005 https://standards.iteh.ai/catalog/standards/sist/7f85bd95-f915-41c0-8532a5ddda33d0b3/sist-iso-19125-1-2005

## Geographic information — Simple feature access —

# Part 1: Common architecture

#### 1 Scope

This part of ISO 19125 establishes a common architecture and defines terms to use within the architecture.

This part of ISO 19125 does not attempt to standardize and does not depend upon any part of the mechanism by which Types are added and maintained, including the following:

- a) syntax and functionality provided for defining types;
- b) syntax and functionality provided for defining functions;
- c) physical storage of type instances in the database; PREVEW
- d) specific terminology used to refer to User Defined Types, for example UDT.

This part of ISO 19125 does standardize names and geometric definitions for Types for Geometry. <u>SIST ISO 19125-1:2005</u>

This part of ISO 19125 does not place any requirements on how to define the Geometry Types in the internal schema nor does it place any requirements on when or how or who defines the Geometry Types.

### 2 Conformance

In order to conform to this part of ISO 19125, an implementation shall satisfy the requirements of one or more test suites specified in the other parts of ISO 19125.

#### **3** Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 19107:2003, Geographic information — Spatial schema

ISO 19111:2003, Geographic information — Spatial referencing by coordinates

#### 4 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

# **4.1 boundary** set that represents the limit of an entity

#### ISO 19125-1:2004(E)

NOTE Boundary is most commonly used in the context of geometry, where the set is a collection of points or a collection of objects that represent those points. In other arenas, the term is used metaphorically to describe the transition between an entity and the rest of its domain of discourse.

#### [ISO 19107]

#### 4.2

#### buffer

**geometric object** (4.14) that contains all **direct positions** (4.7) whose distance from a specified geometric object is less than or equal to a given distance

[ISO 19107]

#### 4.3

#### coordinate

one of a sequence of *n*-numbers designating the position of a **point** (4.17) in *n*-dimensional space

NOTE In a coordinate reference system, the numbers must be qualified by units.

[adapted from ISO 19111]

#### 4.4

#### coordinate dimension

number of measurements or axes needed to describe a position in a **coordinate system** (4.6)

[ISO 19107]

## iTeh STANDARD PREVIEW

#### 4.5

4.6

coordinate reference system (standards.iteh.ai)

coordinate system (4.6) that is related to the real world by a datum

[adapted from ISO 19111]

SIST ISO 19125-1:2005 https://standards.iteh.ai/catalog/standards/sist/7f85bd95-f915-41c0-8532a5ddda33d0b3/sist-iso-19125-1-2005

#### coordinate system

set of mathematical rules for specifying how coordinates (4.3) are to be assigned to point (4.17)

[ISO 19111]

#### 4.7

#### curve

1-dimensional geometric primitive (4.15), representing the continuous image of a line

NOTE The boundary of a curve is the set of points at either end of the curve. If the curve is a cycle, the two ends are identical, and the curve (if topologically closed) is considered to not have a boundary. The first point is called the start point, and the last is the end point. Connectivity of the curve is guaranteed by the "continuous image of a line" clause. A topological theorem states that a continuous image of a connected set is connected.

[ISO 19107]

#### 4.7

#### direct position

position described by a single set of coordinates (4.3) within a coordinate reference system (4.5)

[ISO 19107]

#### 4.9

end point last point (4.17) of a curve (4.7)

[ISO 19107]

#### 4.10

#### exterior

difference between the universe and the closure

NOTE The concept of exterior is applicable to both topological and geometric complexes.

[ISO 19107]

#### 4.11

#### feature

abstraction of real world phenomena

NOTE A feature may occur as a type or an instance. Feature type or feature instance is used when only one is meant.

[adapted from ISO 19101]

#### 4.12

#### feature attribute

characteristic of a feature (4.11)

NOTE A feature attribute has a name, a data type, and a value domain associated to it. A feature attribute for a feature instance also has an attribute value taken from the value domain.

[adapted from ISO 19101]

#### 4.13

## iTeh STANDARD PREVIEW

geometric complex

set of disjoint **geometric primitives** (4.15) where the **boundary** (4.1) of each geometric primitive can be represented as the union of other geometric primitives of smaller dimension within the same set

NOTE The geometric primitives in the set are disjoint in the sense that no direct position is interior to more than one geometric primitive. The set is closed under boundary operations, meaning that for each element in the geometric complex, there is a collection (also a geometric complex) of geometric primitives that represents the boundary of that element. Recall that the boundary of a point (the only 0D primitive object type in geometry) is empty. Thus, if the largest dimension geometric primitive is a solid (3D), the composition of the boundary operator in this definition terminates after at most 3 steps. It is also the case that the boundary of any object is a cycle.

[ISO 19107]

#### 4.14

#### geometric object spatial object representing a geometric set

NOTE A geometric object consists of a geometric primitive, a collection of geometric primitives, or a geometric complex treated as a single entity. A geometric object may be the spatial representation of an object such as a feature or a significant part of a feature.

[ISO 19107]

#### **4.15** geometric primitive geometric object (4.14) representing a single, connected, homogeneous element of space

NOTE Geometric primitives are non-decomposed objects that represent information about geometric configuration. They include points, curves, surfaces, and solids.

[ISO 19107]

#### 4.16

#### interior

set of all **direct positions** (4.7) that are on a **geometric object** (4.14) but which are not on its **boundary** (4.1)

NOTE The interior of a topological object is the homomorphic image of the interior of any of its geometric realizations. This is not included as a definition because it follows from a theorem of topology.

#### [ISO 19107]

#### 4.17

point

0-dimensional geometric primitive (4.15), representing a position

NOTE The boundary of a point is the empty set.

[ISO 19107]

#### 4.18

#### simple feature

**feature** (4.11) restricted to 2D geometry with linear interpolation between vertices, having both spatial and non spatial attributes

#### 4.19

start point first point (4.17) of a curve (4.7)

[ISO 19107]

## iTeh STANDARD PREVIEW (standards.iteh.ai)

#### 4.20

surface 2-dimensional geometric primitive (4.15), locally representing a continuous image of a region of a plane https://standards.iteh.ai/catalog/standards/sist/7f85bd95-f915-41c0-8532-

NOTE The boundary of a surface is the set of oriented, closed curves that delineate the limits of the surface.

[adapted from ISO 19107]

### 5 Abbreviated terms

- API Application Program Interface
- COM Component Object Model
- CORBA Common Object Request Broker Architecture
- DCE Distributed Computing Environment
- DCOM Distributed Component Objected Model
- DE-9IM Dimensionally Extended Nine-Intersection Model
- IEEE Institute of Electrical and Electronics Engineers, Inc.
- NDR Little Endian byte order encoding
- OLE Object Linking and Embedding
- RPC Remote Procedure Call
- SQL Structured Query Language


- SRID Spatial Reference System Identifier
- XDR Big Endian byte order encoding
- UDT User Defined Type
- UML Unified Modeling Language
- WKB Well-Known Binary (representation for example, geometry)

#### 6 Architecture

#### 6.1 Geometry object model

#### 6.1.1 Overview

This subclause describes the object model for simple feature geometry. The simple feature geometry object model is Distributed Computing Platform neutral and uses UML notation. The object model for geometry is shown in Figure 1. The base Geometry class has subclasses for Point, Curve, Surface and GeometryCollection. Each geometric object is associated with a Spatial Reference System, which describes the coordinate space in which the geometric object is defined.

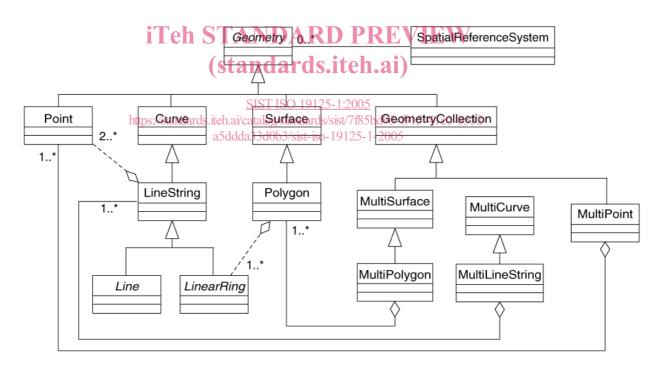




Figure 1 is based on an extended Geometry model with specialized 0-, 1- and 2-dimensional collection classes named MultiPoint, MultiLineString and MultiPolygon for modelling geometries corresponding to collections of Points, LineStrings and Polygons, respectively. MultiCurve and MultiSurface are introduced as abstract superclasses that generalize the collection interfaces to handle Curves and Surfaces. Figure 1 shows aggregation lines between the leaf-collection classes and their element classes; the aggregation lines for non-leaf-collection classes are described in the text.

#### ISO 19125-1:2004(E)

The attributes, methods and assertions for each Geometry class are described below. In describing methods, *this* is used to refer to the receiver of the method (the object being messaged).

#### 6.1.2 Geometry

#### 6.1.2.1 Description

Geometry is the root class of the hierarchy. Geometry is an abstract (non-instantiable) class.

The instantiable subclasses of Geometry defined in this International Standard are restricted to 0, 1 and 2-dimensional geometric objects that exist in 2-dimensional coordinate space ( $\Re^2$ ).

All instantiable Geometry classes described in this part of ISO 19125 are defined so that valid instances of a Geometry class are topologically closed, i.e. all defined geometries include their boundary.

#### 6.1.2.2 Basic methods on geometric objects

- Dimension ():Integer The inherent dimension of *this* geometric object, which must be less than or equal to the coordinate dimension. This specification is restricted to geometries in 2-dimensional coordinate space.
- **GeometryType** ():String Returns the name of the instantiable subtype of Geometry of which *this* geometric object is a instantiable member. The name of the subtype of Geometry is returned as a string.
- SRID ():Integer Returns the Spatial Reference System ID for this geometric object.
- Envelope():Geometry The minimum bounding box for *this* Geometry, returned as a Geometry. The polygon is defined by the corner points of the bounding box [(MINX, MINY), (MAXX, MINY), (MAXX, MINY), (MAXX, MINY), (MAXX, MINY), (MAXX, MINY)].
- AsText():String Exports this geometric object to a specific Well-known Text Representation of Geometry.
- AsBinary():Binary Exports this geometric object to a specific Well-known Binary Representation of Geometry.
- **IsEmpty**():Integer Returns 1 (TRUE) if *this* geometric object is the empty Geometry. If true, then this geometric object represents the empty point set,  $\emptyset$ , for the coordinate space.
- IsSimple():Integer Returns 1 (TRUE) if *this* geometric object has no anomalous geometric points, such as self intersection or self tangency. The description of each instantiable geometric class will include the specific conditions that cause an instance of that class to be classified as not simple.
- Boundary():Geometry Returns the closure of the combinatorial boundary of *this* geometric object (Reference [1], section 3.12.2). Because the result of this function is a closure, and hence topologically closed, the resulting boundary can be represented using representational Geometry primitives (Reference [1], section 3.12.2).

#### 6.1.2.3 Methods for testing spatial relations between geometric objects

The methods in this subclause are defined and described in more detail following the description of the subtypes of Geometry.

- **Equals**(anotherGeometry:Geometry):Integer Returns 1 (TRUE) if *this* geometric object is "spatially equal" to anotherGeometry.
- **Disjoint**(anotherGeometry:Geometry):Integer Returns 1 (TRUE) if *this* geometric object is "spatially disjoint" from anotherGeometry.

- Intersects(anotherGeometry:Geometry):Integer Returns 1 (TRUE) if this geometric object "spatially intersects" anotherGeometry.
- **Touches**(anotherGeometry:Geometry):Integer Returns 1 (TRUE) if *this* geometric object "spatially touches" anotherGeometry.
- Crosses(anotherGeometry:Geometry):Integer Returns 1 (TRUE) if *this* geometric object "spatially crosses' anotherGeometry.
- **Within**(anotherGeometry:Geometry):Integer Returns 1 (TRUE) if *this* geometric object is "spatially within" anotherGeometry.
- Contains(anotherGeometry:Geometry):Integer Returns 1 (TRUE) if *this* geometric object "spatially contains" anotherGeometry.
- Overlaps(anotherGeometry:Geometry):Integer Returns 1 (TRUE) if this geometric object "spatially overlaps" anotherGeometry.
- Relate(anotherGeometry:Geometry, intersectionPatternMatrix:String):Integer Returns 1 (TRUE) if this
  geometric object is spatially related to anotherGeometry by testing for intersections between the interior,
  boundary and exterior of the two geometric objects as specified by the values in the
  intersectionPatternMatrix.

#### 6.1.2.4 Methods that support spatial analysis

- Distance(anotherGeometry:Geometry):Double Returns the shortest distance between any two Points in the two geometric objects as calculated in the spatial reference system of *this* geometric object.
- Buffer(distance:Double):Geometry Returns a geometric object that represents all Points whose distance from this geometric object is less than or equal to distance. Calculations are in the spatial reference system of this geometric object standards/sist/785bd95-1915-41c0-8532a5ddda33d0b3/sist-iso-19125-1-2005
- ConvexHull():Geometry Returns a geometric object that represents the convex hull of *this* geometric object.
- Intersection (another Geometry: Geometry): Geometry Returns a geometric object that represents the Point set intersection of *this* geometric object with another Geometry.
- Union(anotherGeometry:Geometry):Geometry Returns a geometric object that represents the Point set union of *this* geometric object with anotherGeometry.
- Difference(anotherGeometry:Geometry):Geometry Returns a geometric object that represents the Point set difference of *this* geometric object with anotherGeometry.
- SymDifference(anotherGeometry:Geometry):Geometry Returns a geometric object that represents the Point set symmetric difference of *this* geometric object with anotherGeometry.

#### 6.1.3 GeometryCollection

#### 6.1.3.1 Description

A GeometryCollection is a geometric object that is a collection of 1 or more geometric objects.

All the elements in a GeometryCollection shall be in the same Spatial Reference. This is also the Spatial Reference for the GeometryCollection.