INTERNATIONAL STANDARD

ISO/IEC

14496-3

Information technology — Coding of audio-visual objects —

Part 3:
Audio

AMENDMENT 8: MP4FF box for original audio file information

Technologies de l'information — Codage des objets audiovisuels —

Partie 3: Codage audio

AMENDEMENT 8: Boîte MP4FF pour information de fichier audio originale

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/IEC 14496-3:2005/Amd 8:2008
https://standards.iteh.ai/catalog/standards/sist/3ddab9b4-dff8-41cd-8cfe-
33fde33aeb5d/iso-iec-14496-3-2005-amd-8-2008

　　　　　　　　　　　　　　　　　　　　　　　　　　　　　　　　　　　© ISO/IEC 2008 – All rights reserved

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

Amendment 8 to ISO/IEC 14496-3:2005 was prepared by Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 29, *Coding of audio, picture, multimedia and hypermedia information*.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO/IEC 14496-3:2005/Amd 8:2008
https://standards.iteh.ai/catalog/standards/sist/3ddab9b4-dff8-41cd-8cfe-
33fde33aeb5d/iso-iec-14496-3-2005-amd-8-2008

ISO/IEC 14496-3:2005/Amd 8:2008
https://standards.iteh.ai/catalog/standards/sist/3ddab9b4-dff8-41cd-8cfe-
33fde33aeb5d/iso-iec-14496-3-2005-amd-8-2008

Information technology — Coding of audio-visual objects —

Part 3:
Audio

AMENDMENT 8: MP4FF box for original audio file information

1 Scope

After 1.6.7, add the following subclause:

1.6.8. Definition of the Original Audio File Information for the ISO Base Media file format

1.6.8.1 Introduction

The Original Audio File Information Box permits the storage of the ancillary (non-audio) data of an original audio file in an ISO Base Media File format file. This file would typically also contain the compressed audio data of the original audio file. This box is particularly useful in combination with lossless audio coding (e.g. MPEG-4 ALS, SLS) when restoration of the original input audio file is of interest.

1.6.8.2 Definition

Container: Meta box ('meta')

Mandatory: No

Quantity: Zero or one

The original audio file information provides information about an original audio file, including a file type, and provides the OriginalHeader(), OriginalTrailer() and AuxData() blocks via the item location box.

The OriginalHeader() block stores the header part of the original audio file and it is referenced from an entry of the item location box. The header part includes all bytes prior to the first audio data sample in the original file.

The OriginalTrailer() block stores the trailer part of the original audio file and it is referenced from an entry of the item location box. The trailer part includes all bytes after the last audio data sample in the original file.

The AuxData() block stores additional information added by the encoder related to the original audio file and is referenced from an entry of the item location box. The contents of AuxData() are not used in reconstructing original file.

The original audio file information is stored as meta-data in a MetaBox. The handler type for this MetaBox is 'oafi', and such a MetaBox must contain a DataBox containing a OrigAudioFileInfoRecord, or identify a primary item whose data is an OrigAudioFileInfoRecord.

1.6.8.3 Syntax

The syntax of the Original Audio File Information Box is as follows:

```
aligned(8) class DataBox extends FullBox('data', version=0, 0) {

}

aligned(8) class OrigAudioFileInfoRecord {

    unsigned int(4) file_type;

    unsigned int(4) reserved;

    unsigned int(16) header_item_ID;

    unsigned int(16) trailer_item_ID;

    unsigned int(16) aux_item_ID;

    if (file_type == "1111") string original_MIME_type;

}
```

The syntax of OriginalHeader(), OriginalTrailer() and AuxData() is shown in Tables AMD8.1, AMD8.2, and AMD8.3. The original_MIME_type is a Null-terminated string in UTF-8 characters identifying the original file type.

Table AMD8.1 — Syntax of OriginalHeader()

Syntax	No. Of bits	Mnemonic
OriginalHeader() {		
header_length	64	bslbf
orig_header[];	header_length * 8	bslbf
}		

Table AMD8.2 — Syntax of OriginalTrailer()

Syntax	No. Of bits	Mnemonic
OriginalTrailer() {		
trailer_length;	64	bslbf
orig_trailer[];	trailer_length * 8	bslbf
}		

Table AMD8.3 — Syntax of AuxData()

Syntax	No. Of bits	Mnemonic
AuxData() {		
aux_length;	64	bslbf
aux_data[];	aux_length * 8	bslbf
}		

1.6.8.4 Semantics

file_type describes the type of the original input file (see Table AMD8.4 for a description of possible values).

Table AMD8.4 — file_type values

Field	#Bits	Description / Values
file_type	4	0000 = unknown / raw file
		0001 = wave file
		0010 = aiff file
		0011 = bwf file
		0100 = Sony Wave64 file (.w64)
		0101 = bwf with RF64
		1111 = "escape" for MIME type
		(other values are reserved)

header_item_ID is the ID that references the OriginalHeader() entry in the item location box. If this value is 0, there is no OriginalHeader() information. If the OriginalHeader() was empty (of zero length) then an explicitly empty OriginalHeader() item should be supplied.

trailer_item_ID is the ID that references the OriginalTrailer() entry in the item location box. If this value is 0, there is no OriginalTrailer() information. If the OriginalTrailer() was empty (of zero length) then an explicitly empty OriginalTrailer () item should be supplied.

aux_item_ID is the ID that references the AuxData() entry in the item location box. If this value is 0, there is no AuxData() information. If the AuxData() was empty (of zero length) then an explicitly empty AuxData () item should be supplied.

The elements of OriginalHeader, OriginalTrailer and AuxData are shown in Tables AMD8.5, AMD8.6, and AMD8.7.

Table AMD8.5 — Elements of OriginalHeader()

Field	#Bits	Description / Values
header_length	64	Size of the original header field in bytes.
orig_header[]	header_length*8	Header of original audio file

Table AMD8.6 — Elements of OriginalTrailer()

Field	#Bits	Description / Values
trailer_length	64	Size of the original trailer field in bytes.
orig_trailer[]	trailer_length*8	Trailer of original audio file

Table AMD8.7 — Elements of AuxData()

Field	#Bits	Description / Values
aux_length	64	Size of the auxiliary data field in bytes.
aux_data	aux_length*8	Auxiliary data (not required for decoding)

1.6.8.5 Informative: Example MP4 file

An example MP4 file containing original header, original trailer and auxiliary data is shown in Figure AMD8.1.
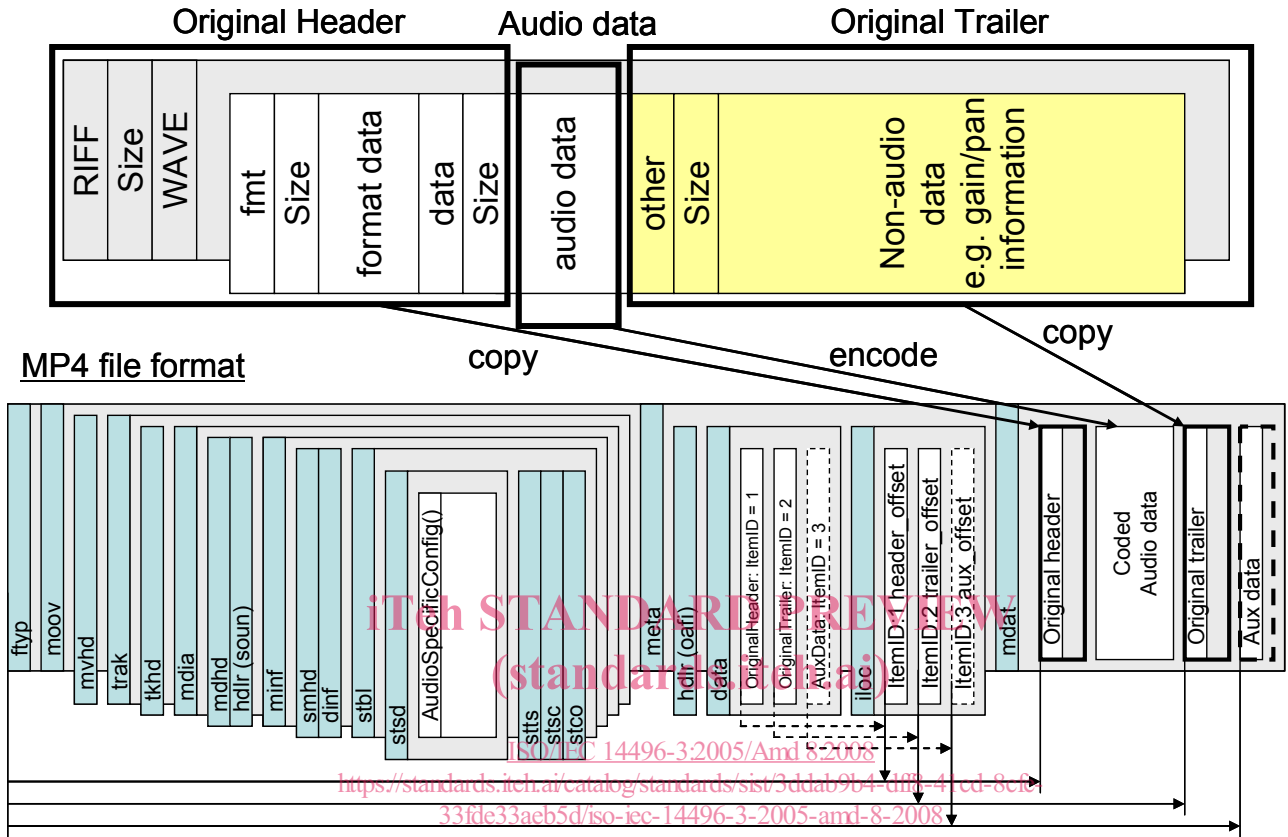
Input file: Wave file

Original Header   Audio data   Original Trailer

| RIFF | Size | WAVE | fmt | Size | format data | data | Size | | audio data | | other | Size | Non-audio data e.g. gain/pan information |

MP4 file format

copy   encode   copy

ftyp / moov / mvhd / trak / tkhd / mdia / mdhd / hdlr (soun) / minf / smhd / dinf / stbl / stsd / AudioSpecificConfig() / stts / stsc / stco / meta / hdlr (oafi) / data / OriginalHeader: ItemID = 1 / Original Trailer: ItemID = 2 / AuxData:ItemID = 3 / iloc / ItemID:1 header offset / ItemID:2 trailer offset / ItemID:3 aux_offset / mdat / Original header / Coded Audio data / Original trailer / Aux data

Figure AMD8.1 — Possible order of blocks

iTeh STANDARD PREVIEW
(standards.iteh.ai)