

# INTERNATIONAL STANDARD

ISO  
**20685**

Second edition  
2010-06-15

---

---


## 3-D scanning methodologies for internationally compatible anthropometric databases

*Méthodologies d'exploration tridimensionnelles pour les bases de données anthropométriques compatibles au plan international*

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 20685:2010](#)

<https://standards.iteh.ai/catalog/standards/sist/a46607f0-c15e-4718-b9ef-09fce52ecab/iso-20685-2010>



Reference number  
ISO 20685:2010(E)

© ISO 2010

**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 20685:2010](#)

<https://standards.iteh.ai/catalog/standards/sist/a46607f0-c15e-4718-b9ef-09bfce52ecab/iso-20685-2010>



### COPYRIGHT PROTECTED DOCUMENT

© ISO 2010

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Contents

	Page
<b>Foreword .....</b>	<b>iv</b>
<b>Introduction.....</b>	<b>v</b>
<b>1 Scope.....</b>	<b>1</b>
<b>2 Normative references.....</b>	<b>1</b>
<b>3 Terms and definitions .....</b>	<b>1</b>
<b>4 Accuracy of extracted measurements .....</b>	<b>5</b>
<b>5 Research designs for establishing accuracy of body dimensions extracted from scanners.....</b>	<b>8</b>
<b>6 Method for estimating the number of subjects needed .....</b>	<b>9</b>
<b>Annex A (informative) Methods for reducing error in 3-D scanning.....</b>	<b>11</b>
<b>Bibliography.....</b>	<b>20</b>

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 20685:2010](#)

<https://standards.iteh.ai/catalog/standards/sist/a46607f0-c15e-4718-b9ef-09bfce52ecab/iso-20685-2010>

## **Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 20685 was prepared by Technical Committee ISO/TC 159, *Ergonomics*, Subcommittee SC 3, *Anthropometry and biomechanics*.

**iTeh STANDARD PREVIEW**

This second edition cancels and replaces the first edition (ISO 20685:2005), of which it constitutes a minor revision.

**(standards.iteh.ai)**

[ISO 20685:2010](#)

<https://standards.iteh.ai/catalog/standards/sist/a46607f0-c15e-4718-b9ef-09fce52ecab/iso-20685-2010>

## Introduction

Anthropometric measures are key to many International Standards. These measures can be gathered using a variety of instruments. An instrument with relatively new application to anthropometry is a three-dimensional (3-D) scanner. 3-D scanners generate a 3-D point cloud of the outside of the human body that can be used for clothing and automotive design, engineering and medical applications. There are currently no standardized methods for using 3-D point clouds in the design process. As a result, many users extract one-dimensional (1-D) data from 3-D point clouds. This International Standard concerns the application of 3-D scanners to the collection of one-dimensional anthropometric data for use in design.

There are a number of different fundamental technologies that underlie commercially available systems. These include stereophotogrammetry, ultrasound and light (laser light, white light and infrared). Further, the software that is available to process data from the scan varies in its methods. Additionally, software to extract dimensions similar to traditional dimensions varies markedly in features and capabilities.

As a result of differences in fundamental technology, hardware and software, extracted measurements from several different systems can be markedly different for the same individual. Since 3-D scanning can be used to gather measurements, such as lengths and circumferences, it was important to develop an International Standard that allows users of such systems to judge whether the 3-D system is adequate for these needs.

The intent of ISO 20685 is to ensure comparability of body measurements as specified by ISO 7250-1 but measured with the aid of 3-D body scanners rather than with traditional anthropometric instruments such as tape measures and callipers. It is further intended that by conformance with this International Standard any data extracted from scans will be suitable for inclusion in international databases such as those described in ISO 15535.

[ISO 20685:2010](#)

<https://standards.iteh.ai/catalog/standards/sist/a46607f0-c15e-4718-b9ef-09fce52ecab/iso-20685-2010>

# iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 20685:2010](#)

<https://standards.iteh.ai/catalog/standards/sist/a46607f0-c15e-4718-b9ef-09bfce52ecab/iso-20685-2010>

# 3-D scanning methodologies for internationally compatible anthropometric databases

## 1 Scope

This International Standard addresses protocols for the use of 3-D surface-scanning systems in the acquisition of human body shape data and measurements defined in ISO 7250-1 that can be extracted from 3-D scans. It does not apply to instruments that measure the location and/or motion of individual landmarks.

While mainly concerned with whole-body scanners, it is also applicable to body-segment scanners (head scanners, hand scanners, foot scanners).

The intended audience is those who use 3-D scanners to create 1-D anthropometric databases and the users of 1-D anthropometric data from 3-D scanners. Although not necessarily aimed at the designers and manufacturers of those systems, scanner designers and manufacturers will find it useful in meeting the needs of clients who build and use 1-D anthropometric databases.

## iTeh STANDARD PREVIEW

## 2 Normative references ([standards.iteh.ai](https://standards.iteh.ai/catalog/standards/sis/14000/10-c15c-4/18-b9cf-09bce32ccab/iso-20685-2010))

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) <https://standards.iteh.ai/catalog/standards/sis/14000/10-c15c-4/18-b9cf-09bce32ccab/iso-20685-2010> applies.

ISO 7250-1:2008, *Basic human body measurements for technological design — Part 1: Body measurement definitions and landmarks*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

**NOTE** In the case of definitions of terms for skeletal landmarks, when there is a separate term for the skin overlying the landmark and another for the landmark itself, the skin landmark term is used. Where there is no separate term, the skeletal term is used and assumed to refer to the skin overlying the landmark.

### 3.1

#### **three-dimensional**

##### **3-D**

pertaining to the use of three orthogonal scales on which the three coordinates,  $x$ ,  $y$  and  $z$ , can be measured to give the precise position of any relevant anatomical point in the considered space

**NOTE** Many anthropometric distances can be calculated from the coordinates of anatomical landmarks. Some additional points may be necessary to obtain circumferences.

### 3.2

#### **3-D body scanner**

hardware and software system that creates digital data representing a human form, or parts thereof, in three dimensions

**3.3**

**3-D processing software**

operating system, user interface, programs, algorithms and instructions associated with a 3-D scanning system

**3.4**

**3-D scanner hardware**

physical components of a 3-D scanner and any associated computer(s)

**3.5**

**accuracy**

extent to which the measured value approximates a true value

NOTE Since it is difficult to trace the accuracy of complex hardware and software systems to recognized ISO sources, for the purposes of this International Standard *true value* is taken to mean the measured value obtained by a skilled anthropometrist using traditional instruments such as tape and calliper.

**3.6**

**acromion**

most lateral point of the lateral edge of the spine (acromial process) of the scapula

[ISO 7250-1:2008, 2.2.1]

**3.7**

**anatomical landmark**

clearly defined point on the body that can be used for defining anthropometric measurements

**3.8**

**anterior superior iliac spine**

most downward-directed point of the iliac crest

[ISO 20685:2010](#)

<https://standards.iteh.ai/catalog/standards/sist/a46607f0-c15e-4718-b9ef>

09bfce52ecab/iso-20685-2010

collection of individual body measurements (anthropometric data) and background information (demographic data) recorded on a group of people (the sample)

[ISO 15535:2006, 3.8]

**3.10**

**cervicale**

tip of the prominent bone at the base of the back of the neck (spinous process of the seventh cervical vertebra)

NOTE Adapted from ISO 7250-1:2008, definition 2.2.5.

**3.11**

**crotch level**

distal part of the inferior ramus of the pubic bone on a standing subject

NOTE It is typically marked using the top of a horizontal straightedge.

**3.12**

**Frankfurt plane**

standard horizontal plane at the level of the left tragion and left infraorbitale when the midsagittal plane of the head is held vertically

NOTE Adapted from ISO 7250-1:2008, definition 2.2.8.

**3.13****glabella**

most anterior point of the forehead between the browridges in the midsagittal plane

[ISO 7250-1:2008, 2.2.9]

**3.14****iliocristale**

most lateral palpable point of the iliac crest of the pelvis

**3.15****infraorbitale**

lowest point on the anterior border of the bony eye socket

**3.16****lateral malleolus**

most lateral point of the right lateral malleolus (outside ankle bone)

**3.17****lowest rib**

inferior point of the bottom of the rib cage

**3.18****menton**

lowest point of the tip of the chin in the midsagittal plane

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

**3.19****mesosternale**

point on the union of the third and fourth sternaebræ ISO 20685:2010  
<https://standards.iteh.ai/catalog/standards/sist/a46607f0-c15e-4718-b9ef-09fce52ecab/iso-20685-2010>

[ISO 7250-1:2008, 2.2.17]

**3.20****opisthocranion**

most distant point from glabella in the midsagittal plane

**3.21****point cloud**

collection of 3-D points in space referenced by their coordinate values

NOTE A point cloud constitutes the raw data from a 3-D scanner and needs to be translated to a human axis system.

**3.22****radial styloid**

protuberance of the radius at the wrist

NOTE Adapted from ISO 7250-1:2008, definition 2.2.26.

**3.23****repeatability**

extent to which the values of a variable measured twice on the same subject are the same

**3.24****sellion**

point of greatest indentation of the nasal root depression

**3.25**

**stylion**

distal point of the radial styloid

NOTE Adapted from ISO 7250-1:2008, definition 2.2.26.

**3.26**

**suprapatella**

superior point of the patella (kneecap)

**3.27**

**thelion**

centre of the nipple

**3.28**

**thyroid cartilage**

prominent cartilage on the anterior surface of the neck

[ISO 7250-1:2008, 2.2.28]

**3.29**

**tibiale**

point at the upper inside (medial) edge of the proximal end of the tibial bone of the lower leg

[ISO 7250-1:2008, 2.2.29]

**3.30**

**top of head**

highest point of the head with the head oriented in the Frankfurt plane

## iTeh STANDARD PREVIEW (standards.iteh.ai)

**3.31**

**tragion**

[ISO 20685:2010  
https://standards.iteh.ai/catalog/standards/sist/a46607f0-c15e-4718-b9ef-09fce52ecab/iso-20685-2010](https://standards.iteh.ai/catalog/standards/sist/a46607f0-c15e-4718-b9ef-09fce52ecab/iso-20685-2010)

NOTE Adapted from ISO 7250-1:2008, definition 2.2.30.

**3.32**

**tragus**

small cartilaginous flap in front of the ear hole

NOTE Adapted from ISO 7250-1:2008, definition 2.2.30.

**3.33**

**ulnar stylion**

most distal point on the ulnar styloid

NOTE Adapted from ISO 7250-1:2008, definition 2.2.26.

**3.34**

**ulnar styloid**

protuberance of the ulna at the wrist

NOTE Adapted from ISO 7250-1:2008, definition 2.2.26.

**3.35**

**vertical plane**


geometric plane tangent to a point on the body and orthogonal to the mid-sagittal plane

**3.36*****x, y, z coordinate system******axis system***

system for measuring the body with respect to the standing or sitting human where X refers to the fore-and-aft direction (the sagittal axis), Y refers to the side-to-side direction (the transverse axis) and Z refers to the top-to-bottom direction (the longitudinal axis)

See Figure 1.

**NOTE** Researchers establish their own origin for the axis system, convenient to their research, while keeping the direction of the axes as indicated and reporting the origin in the data base and any publications.

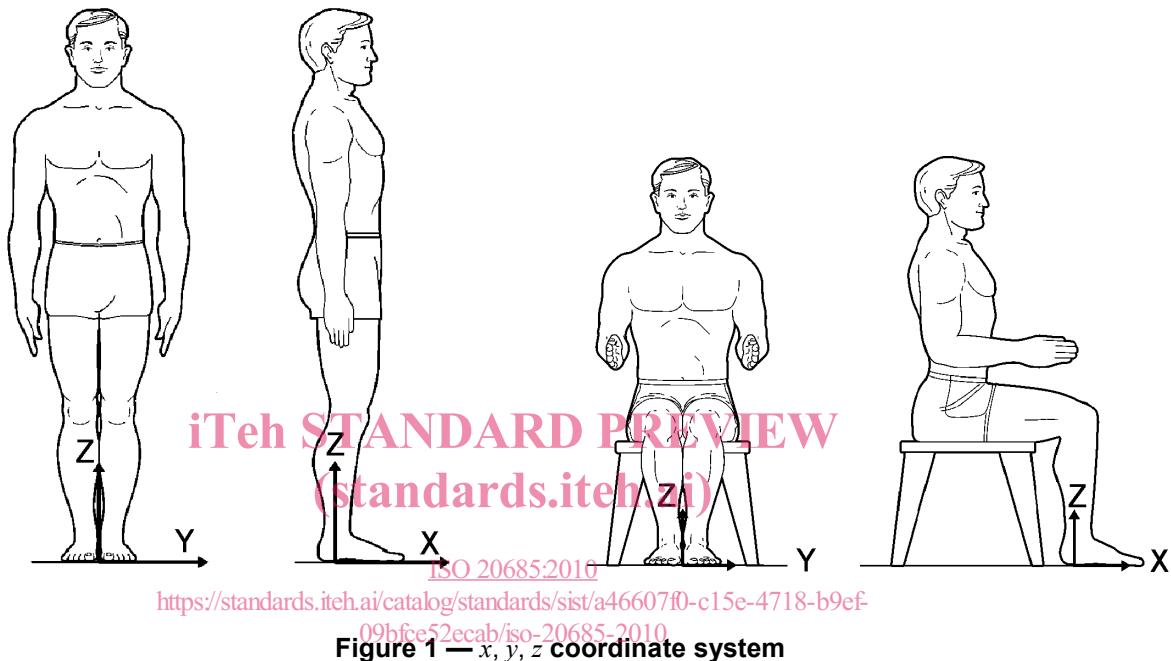

## 4 Accuracy of extracted measurements

### 4.1 Selection of extracted measurements

In order to use data from 3-D scanners in internationally compatible databases, dimensions should be drawn from ISO 7250-1. However, not all of those measurements are well suited to extraction from 3-D scanned images. In particular, the resolution from whole-body scanners might not be sufficient to allow accurate extraction of measurements from smaller body parts such as the hand. Tables 1 to 3 give measurements according to the type of scanner most likely to produce the best results. The numbers indicate the measurement number in ISO 7250-1.