#### **DRAFT INTERNATIONAL STANDARD ISO/DIS 16792**



ISO/TC 10 Secretariat: SIS

Voting begins on Voting terminates on

2012-11-01 2013-04-01

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

# Technical product documentation — Digital product definition data practices

Documentation technique de produits — Données de définition d'un produit

[Revision of first edition (ISO 16792:2006)]

ICS 01.110; 35.240.10

AST A TOTAL Standard: Standards Stan

# ISO/CEN PARALLEL PROCESSING

This draft has been developed within the International Organization for Standardization (ISO), and processed under the **ISO-lead** mode of collaboration as defined in the Vienna Agreement.

This draft is hereby submitted to the ISO member bodies and to the CEN member bodies for a parallel five-month enquiry.

Should this draft be accepted, a final draft, established on the basis of comments received, will be submitted to a parallel two-month approval vote in ISO and formal vote in CEN.

To expedite distribution, this document is circulated as received from the committee secretariat. ISO Central Secretariat work of editing and text composition will be undertaken at publication stage.

Pour accélérer la distribution, le présent document est distribué tel qu'il est parvenu du secrétariat du comité. Le travail de rédaction et de composition de texte sera effectué au Secrétariat central de l'ISO au stade de publication.

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

Hillos: Istandards itelial standards sandards is in the sandards itelial standards i

### Copyright notice

This ISO document is a Draft International Standard and is copyright-protected by ISO. Except as permitted under the applicable laws of the user's country, neither this ISO draft nor any extract from it may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, photocopying, recording or otherwise, without prior written permission being secured.

Requests for permission to reproduce should be addressed to either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Reproduction may be subject to royalty payments or a licensing agreement.

Violators may be prosecuted.

# **Contents**

Page

Forewo	ord	.vi	
Introductionvii			
1	Scope	1	
2	Normative references	1	
3	Terms and definitions	2	
4	Data set identification and control	2	
4.1	General		
4.2	Related data		
4.3	Data management	3	
5	Data set requirements	4	
5.1	General		
5.1.1	Fundamental requirements	4	
5.1.2	Design model requirement	5	
5.2	General model requirements	5	
5.2.1	Associativity	5	
5.2.2	Model coordinate systems	6	
5.2.3	Annications of supplemental geometry & & &	7	
5.2.4	Workpiece features not fully modelled	8	
5.3	General method requirements	8	
5.3.1	Data set methods	0	
5.3.2	Model-only	8	
5.3.3	Model and drawing	9	
5.4	Management data	9	
5.4.1	Model-only	9	
5.4.2	Management data in the data set	9	
5.4.3	Management data on a model	10	
5.5	Protection marking	10	
5.5.1	General		
5.5.2	Location on models	10	
5.6	Views on models	10	
6	Design model requirements	13	
6.1	General		
6.2	Geometric scale, units and precision		
6.3	Model completeness		
6.4	Assembly model completeness		
6.5	Installation model completeness		
_	Common requirements for product definition data		
7 7.1	General		
7.1 7.2	Common requirements		
7.2 7.2.1	Display management		
7.2.1 7.2.2	Screen dump		
7.2.2 7.3	Model requirements		
7.3 7.3.1	General		
7.3.1 7.3.2	Associativity		
7.3.2 7.3.3	Associativity		
7.3.3 7.3.4	Annotation planes		
7.3.4 7.3.5	Leader lines		
7.3.5 7.3.6	Direction dependent tolerances		
1.5.0	DII CONON ACPCINCIIL MICIANICO	4	

## **ISO/DIS 16792**

7.3.7	Indicating limited application of a tolerance	
7.3.8	Query types	
7.4	Drawing requirements	
7.4.1	General	
7.4.2	Orthographic views	
7.4.3	Axonometric views	. 27
В	Notes and special notations	
3.1	Common requirements	
3.1.3	Flagnote	
3.2	Model requirements	
3.3	Drawing requirements	. 31
9	Model values and dimensions	. 31
9.1	General	
9.2	Common requirements	. 31
9.2.1	Model value queries	. 31
9.2.2	Resolved dimensions	
9.2.3	Plus and minus tolerances	
9.3	Model requirements	
9.3.1	General	
9.3.2	Theoretically exact and nominal dimensions	. 32
9.3.3	Size values	. 33
9.3.4	Coded size tolerances	. 34
9.3.5	General applications of plus and minus tolerances	. 34
9.3.6	Chamfers Depth specification Depth specification	. 34
9.3.7	Drawing requirements	. 38 44
9.4	Drawing requirements	. 41
10	Drawing requirements  Datum applications  General	. 41
10.1	General	. 41
10.2	Common requirements	. 41
10.3	Model requirements	. 41
10.3.1	Datum systems and model coordinate systems	
10.3.2	Identification of datums	
10.3.3	Associativity of datum features and design data	
10.3.4 10.3.5	Datum target identification and attachment	
10.3.5 10.4	Drawing requirements	. 40 55
10.4		
11	Geometric tolerances	. 55
11.1	General	
11.2	Common requirements	
11.3	Model requirements	
11.3.1	General	
11.3.2 11.3.3	Form tolerances Orientation tolerances	
11.3.4	Profile tolerances	
11.3.4	Location tolerances	
11.3.5	Runout tolerances	
11.3.0	Drawing requirements	
11. <del>4</del> 11.4.1	General	
11.4.2	Requirements applicable to all geometric tolerances	
11.4.3	Form tolerances	
11.4.4	Orientation tolerances	
11.4.5	Profile tolerances	
11.4.6	Position tolerances	
11.4.7	Runout tolerances on a drawing	
12	Welds	
12.1	General	
12.1 12.2	Common requirements	
		. ച

12.2.1	Application of supplemental geometry	
12.2.2	Arrow lines	93
12.3	Model requirements	94
12.3.1	Annotation plane	94
12.3.2	Associativity	94
12.3.3	Indicating extents of the weld	94
12.3.4	Query of weld path	95
12.4	Drawing requirements	96
13	Surface Texture	96
13.1	General	
13.2	Common requirements	96
13.3	Model requirements	96
13.3.1	Display Techniques	96
13.3.2	Annotation plane	98
13.3.3	Associativity	98
13.3.4	Indication of direction of lay	98
13.3.5	Use of all around indication	99
13.4	Drawing requirements	100
Annex	A (informative) Classification codes for drawings and data sets	101
A.1	General	101
A.2	Application	101
A.3	Definitions	101
A.4	Classification code requirements	102
A.4.1	General	102
A.4.2	Classification code location	102
A.4.3	Approval indicators	102
A.4.4	Classification code 1	102
A.4.5	Classification code 2	102
A.4.6	Classification code 3	103
A.4.7	Classification code 4	103
A.4.8	Classification code 5	103
Biblion	Classification code 5graphy	104
_151106	graphydrift, drift.	
	- 20° - 10°	

#### **Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 16792 was prepared by Technical Committee ISO/TC 10, Technical product documentation.

This second edition cancels and replaces the first edition (ISO 167925:2006), which has been technically revised mainly to incorporate the technical changes in ISO 1101:2012 and ISO 5459:2011. Clause 12 on indication for welds and Clause 13 on indications for surface texture have been added. A new informative Annex on classification codes has also been added.

۷i

### Introduction

Every effort was made during the preparation of this International Standard — adapted from ASME Y14.41:2003 — to apply existing requirements developed for two-dimensional (2-D) presentation equally to the output from three-dimensional (3-D) models. Where new Geometrical Product Specification (GPS) rules have proved essential, these have been drafted with a view to their being equally applicable to both 2-D and 3-D. Therefore, in order to maintain the integrity of a single system, these new rules are being incorporated in the relevant existing ISO standards for cross-reference. Application examples have been included where, due to the specific requirements of 3-D modelling, additional guidance was deemed beneficial.

It is recognised that there is a need to support drawings in conjunction with 3 D models now and for the foreseeable future. This need has been addressed in this International Standard through the definition of the two methods for documenting digital models and specification of requirements to ensure that the information in a data set is consistent between the model and the drawing.

The figures in this International Standard are intended only as illustrations to aid the user in understanding the practices elaborated in the text. In some cases, figures show a level of detail as needed for emphasis; in others, they are only complete enough to illustrate a concept or facet thereof. The absence of figures has no bearing on the applicability of the specified requirement or practice.

In order to comply with the requirements of this International Standard, actual data sets will need to meet the content requirements set forth in its text.

Most figures are illustrations of models in a 3-D environment. Figures illustrating drawings in digital format include a border.

Text in uppercase letters used in the figures are intended to appear in digital product definition data, or data sets; while that in lowercase letters is for information only and is not intended to appear in data sets.

vii

Inters: Sandards itelial standards s

# Technical product documentation — Digital product definition data practices

#### 1 Scope

This International Standard specifies requirements for the preparation, revision and presentation of digital product definition data, hereafter referred to as data sets. It supports two methods of application: model-only, and model and drawing in digital format. Its structure presents requirements common to both methods followed by clauses providing for any essential, differing requirements for each method. Additionally, its use in conjunction with computer aided design (CAD) systems could assist in the progression towards improved modelling and annotation practices for CAD and engineering disciplines, as well as serving as a guideline for IT engineers.

The aspects specified in this International Standard refer mainly, but not exclusively, to requirements that differ or are additional to those provided in existing, related standards. Where no such requirements are identified, it is safe to assume that the appropriate existing ISO standards are instead applicable.

#### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 128 (all parts), Technical drawings — General principles of presentation

ISO 129-1:2004, Technical drawings + Indication of dimensions and tolerances — Part 1: General principles

ISO 286 (all parts), ISO system of limits and fits

ISO 1101:2012, Geometrical Product Specifications (GPS) — Geometrical tolerancing — Tolerances of form, orientation, location and run-out

ISO 1302, Geometrical Product Specifications (GPS) — Indication of surface texture in technical product documentation

ISO 2553, Welded, brazed and soldered joints — Symbolic representation on drawings

ISO 2768-1:1989, General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications

ISO 3098-0:1997, Technical product documentation — Lettering — Part 0: General requirements

ISO 3098-5:1997, Technical product documentation — Lettering — Part 5: CAD lettering of the Latin alphabet, numerals and marks

ISO 5456 (all parts), Technical drawings — Projection methods

ISO 5457:1999, Technical product documentation — Sizes and layout of drawing sheets

© ISO 2012 – All rights reserved

ISO 5459:2011 Geometrical product specifications (GPS) – Geometrical tolerancing – Datums and datum

ISO 7200:2004, Technical product documentation — Data fields in title blocks and document headers

ISO 8015, Geometrical product specifications (GPS) -- Fundamentals -- Concepts, principles and rules

ISO 11442:2006, Technical product documentation — Document management

ISO 14660-1:1999, Geometrical Product Specifications (GPS) — Geometrical features — Part 1: General terms and definitions

ISO 16016 Technical product documentation — Protection notices for restricting the use of documents and products

ISO 80000-1, Quantities and units — Part 1: General

IEC 82045-2:2004, Document management — Part 2: Metadata elements and information reference model

#### Terms and definitions

For the purposes of this International Standard, the terms and definitions in ISO 10209:2012 and the following apply.

#### 3.1

absolute coordinate system
primary model coordinate system in the CAD model used to define the location of digital elements in the CAD model

#### 3.2

#### datum system

set of two or more situation features established in a specific order from two or more datum features

To define a datum system, it is necessary to consider the collection surface created by the considered datum features. The invariance class of a collection surface can be complex, prismatic, helical, cylindrical, revolute, planar or spherical (see Table B.1).

[ISO 5459:2011, 3.10]

#### 3.3

#### user defined coordinate system

model coordinate system which is created in the CAD model in addition to the absolute coordinate system

#### Data set identification and control

#### General 4.1

Data sets for which compliance with this International Standard is claimed shall include a reference to this International Standard, ISO 16792, either in the data set itself or in a document referenced by the data set.

The current revision of the data and the computer application(s) and version(s) used to develop the data set shall be specified with other management data, see 5.4.

The data set identifier shall be unique and shall consist of numeric, alphabetic or special characters in any combination. Spaces are not permitted between any of the characters of the data set identifier.

The length of the data set identifier may be a direct function of the computer system and the operating system. When the part or identifying number is used as the data set identifier, the length shall be compatible with recognised limitations on number length in accordance with ISO 7200 and IEC 82045-2.

Special characters, such as hyphen (-), slash (/), or asterisk (\*), shall be selected in a manner that does not hinder data set identification or have an adverse affect on the computer system operation.

A recognisable prefix or suffix may be included as part of the identifier to associate files and sets of related data.

See ISO 7200 and IEC 82045-2 for the description and use of drawings, drawing numbers, and identifying numbers.


#### 4.2 Related data

Related data shall be integral to, or referenced in, the data set. Related data consists of, but is not limited to, analytical data, parts lists, test requirements, material specifications, process and finish requirements in accordance with Figure 1.

#### 4.3 Data management

The following specifies the structure and control requirements for data management:

- a) The data management system shall meet the requirements of ISO 11442, providing information to enable the control and tracking of data sets, throughout the life cycle of the product to which each relates. The system may include work in process, data review status, model checked status, release status, design tool and version, libraries, etc.
- b) Revision history information per ISO 11442 shall be contained in the data set.

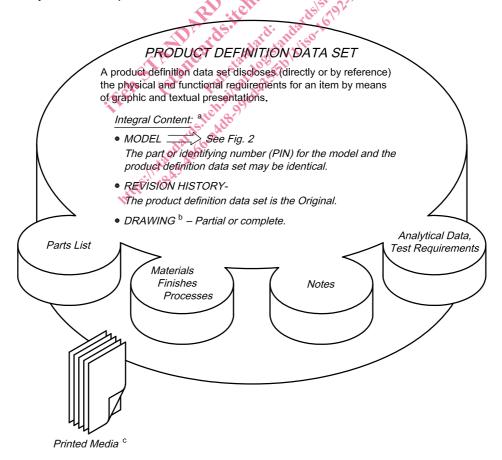

#### Key

- <sup>a</sup> Related data (as applicable) required for complete definition may be integral to or referenced in the product definition data set. Data not integral to the product definition data set may be revised independently.
- b A drawing is not required for Model Only data sets.
- c Related data may be manually or computer generated.

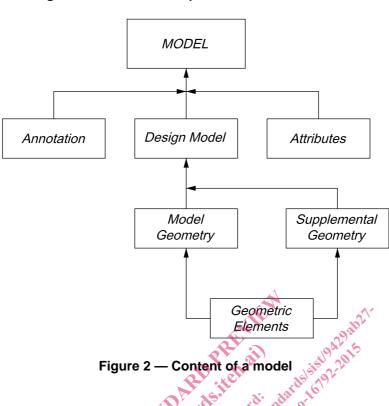


Figure 1 — Content of a product definition data set

## 5 Data set requirements

#### 5.1 General

The data set shall provide complete product definition. For example, a design model, its annotation, and related documentation.

#### 5.1.1 Fundamental requirements

The following are the fundamental requirements and other provisions applicable to both annotated models and drawings, specific to annotated models and specific to drawings.

### c) Common to annotated models and drawings

- All model values and resolved dimensions shall be obtained from the model.
- Rounding requirements for resolved dimensions shall comply with 9.2.2.
- The ability to query the model shall be available, see 7.3.8.
- All angular values shall be queried from the model, see 9.3. Exceptions to this are model coordinate system(s), planes and axes in a datum system, and orthographic views.
- When query is required, a notation stating the requirement for query of the model or associated data shall be added to the drawing or in the general notes.
- When applying tolerances to features, alignment of the annotation plane to the nominal or theoretically exact profile is not required.
- Values obtained from the model for any feature(s) without any tolerance or datum target specifications assigned shall be auxiliary dimensions.

- Legibility requirements of ISO 3098-0 and ISO 3098-5 shall apply when the annotation is viewed perpendicular to the annotation plane.
- Annotation in any given annotation plane shall not overlap other annotation in the same annotation plane when the model is viewed perpendicular to the annotation plane.
- Annotation text within any given annotation plane shall not be placed over the design model when the model is viewed perpendicular to the annotation plane.

#### d) Applicable only to models

- All annotation shall be specified in one or more annotation planes. When CAD software does not support maintenance of annotation plane orientation relative to the model, the model-only method shall not be used, see 7.3.4.
- The associated entities, annotation, and attributes shall be in agreement, see 7.3.2.
- Resolved dimensions created from queried model values are considered the same as dimensions displayed on a model, see 9.2.1.
- Display of centrelines or centre planes for features of size is optional.
- To ensure that the annotation is readable—the text, for example, could be upside down or backwards following rotation of the model—one of the following techniques shall be used:
  - i) ensuring that the reading direction is updated after rotation of a model;
  - ii) inclusion of means of determining the correct reading direction in each annotation plane applied to a model;
  - iii) when using saved views, ensuring that the model is orientated in the intended view direction for example, by including a means of determining the correct reading direction in the view.
- Dimensions and tolerances to internal features may be shown without the use of a section, see Figure 26 c).

#### e) Applicable only to drawings

- Annotation may be applied to orthographic or axonometric views.
- For axonometric views, the orientation of the annotation shall be parallel to, normal to or coincident with the surface to which it applies. An annotation shall not overlap another or the geometrical representation of the part.

#### 5.1.2 Design model requirement

A design model is required and shall be in accordance with 5.2 and Clause 6.

#### 5.2 General model requirements

### 5.2.1 Associativity

The ability to associate digital elements shall be available and maintained. Associativity information shall be electronically accessible.

© ISO 2012 – All rights reserved 5