
International Standard



1481

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Slotted pan head tapping screws

Vis à tôle à tête cylindrique large, fendue

First edition — 1983-08-01

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 1481:1983](https://standards.iteh.ai/catalog/standards/sist/1aa257db-1537-49f3-851b-be3855175a70/iso-1481-1983)

<https://standards.iteh.ai/catalog/standards/sist/1aa257db-1537-49f3-851b-be3855175a70/iso-1481-1983>



UDC 621.882.215.082.8

Ref. No. ISO 1481-1983 (E)

Descriptors : fasteners, screws, slotted head screws, tapping screws, dimensions, designation.

Price based on 3 pages

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been authorized has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 1481 was developed by Technical Committee ISO/TC 2 *Fasteners*, and was circulated to the member bodies in December 1981.

It has been approved by the member bodies of the following countries:

<u>ISO 1481:1983</u>		
Australia	Germany, F.R.	Norway
Austria	Hungary	Poland
Belgium	India	Romania
Brazil	Ireland	South Africa, Rep. of
Canada	Italy	Spain
China	Japan	Sri Lanka
Czechoslovakia	Korea, Dem. P. Rep. of	Sweden
Denmark	Korea, Rep. of	Switzerland
Egypt, Arab Rep. of	Mexico	USA
Finland	Netherlands	
France	New Zealand	

The member bodies of the following countries expressed disapproval of the document on technical grounds:

United Kingdom
USSR

This International Standard cancels and replaces ISO Recommendation R 1481-1970, of which it constitutes a technical revision.

Slotted pan head tapping screws

iTeh STANDARD PREVIEW

1 Scope and field of application (standards.iteh.ai)

This International Standard specifies the characteristics of [slotted pan head tapping screws](https://standards.iteh.ai/catalog/standards/sist/1aa257db-1537-49f3-851b-be3855175a70/iso-1481-1983) with thread sizes from ST 2,2 to ST 9,5 inclusive.

<https://standards.iteh.ai/catalog/standards/sist/1aa257db-1537-49f3-851b-be3855175a70/iso-1481-1983>

2 References

ISO 225, *Fasteners — Bolts, screws, studs and nuts — Symbols and designations of dimensions.*

ISO 1478, *Tapping screws thread.*

ISO 2702, *Heat-treated steel tapping screws — Mechanical properties.*


ISO 3269, *Fasteners — Acceptance inspection.*¹⁾

ISO 4042, *Threaded components — Electroplated coatings components.*¹⁾

ISO 4759/1, *Tolerances for fasteners — Part 1: Bolts, screws and nuts with thread diameters > 1,6 and < 150 mm and product grades A, B and C.*

¹⁾ At present at the stage of draft.

3 Dimensions

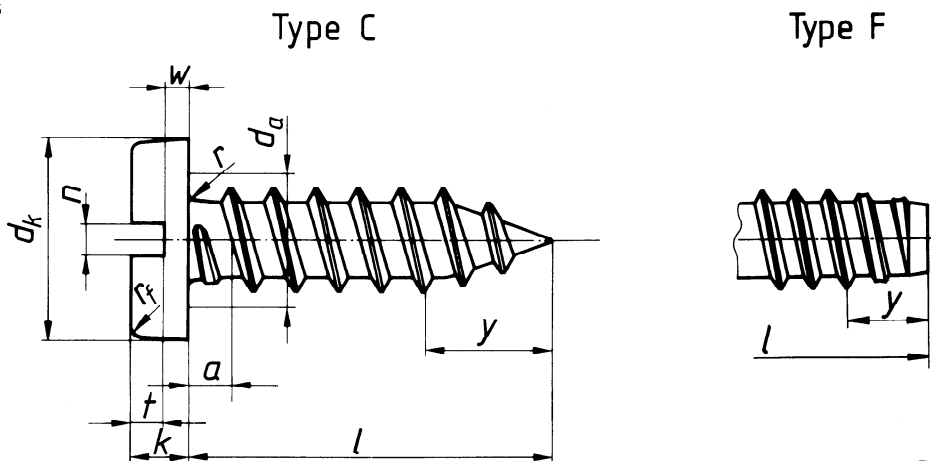

Dimensions in millimetres

Thread size		ST 2,2	ST 2,9	ST 3,5	ST 4,2	ST 4,8	ST 5,5	ST 6,3	ST 8	ST 9,5
$P^{1)}$		0,8	1,1	1,3	1,4	1,6	1,8	1,8	2,1	2,1
$a^{2)}$	max.	0,8	1,1	1,3	1,4	1,6	1,8	1,8	2,1	2,1
d_a	max.	2,8	3,5	4,1	4,9	5,5	6,3	7,1	9,2	10,7
d_k	max.	4	5,6	7	8	9,5	11	12	16	20
	min.	3,7	5,3	6,6	7,6	9,1	10,6	11,6	15,6	19,5
k	max.	1,3	1,8	2,1	2,4	3	3,2	3,6	4,8	6
	min.	1,1	1,6	1,9	2,2	2,7	2,9	3,3	4,5	5,7
n	nom.	0,5	0,8	1	1,2	1,2	1,6	1,6	2	2,5
	min.	0,56	0,86	1,06	1,26	1,26	1,66	1,66	2,06	2,56
	max.	0,7	1	1,2	1,51	1,51	1,91	1,91	2,31	2,81
r	min.	0,1	0,1	0,1	0,2	0,2	0,25	0,25	0,4	0,4
r_f	ref.	0,6	0,8	1	1,2	1,5	1,6	1,8	2,4	3
t	min.	0,5	0,7	0,8	1	1,2	1,3	1,4	1,9	2,4
w	min.	0,5	0,7	0,8	0,9	1,2	1,3	1,4	1,9	2,4
y ref. ³⁾	Type C	2	2,6	3,2	3,7	4,3	5	6	7,5	8
	Type F	1,6	2,1	2,5	2,8	3,2	3,6	3,6	4,2	4,2

		Type C		Type F						
nom.	min.	max.	min.	max.						
4,5	3,7	5,3	3,7	4,5						
6,5	5,7	7,3	5,7	6,5						
9,5	8,7	10,3	8,7	9,5						
13	12,2	13,8	12,2	13						
16	15,2	16,8	15,2	16						
19	18,2	19,8	18,2	19						
22	21,2	22,8	20,7	22						
25	24,2	25,8	23,7	25						
32	30,7	33,3	30,7	32						
38	36,7	39,3	36,7	38						
45	43,7	46,3	43,5	45						
50	48,7	51,3	48,5	50						

- 1) P = pitch of the thread.
- 2) Distance from the underside of the head to the first major diameter of the thread within the specified limits.
- 3) Length of incomplete thread.
- 4) Sizes with lengths marked with a dash (—) in the table shall not be manufactured.

4 Specifications and reference International Standards

Material	Steel, according to ISO 2702	
Thread	According to ISO 1478	
Mechanical properties	According to ISO 2702	
Tolerances	Product grade	A
	International Standard	ISO 4759/1
Finish	Plain Requirements for electroplating are covered in ISO 4042. If different electroplating requirements are desired or if requirements are needed for other finishes, they should be negotiated between customer and supplier.	
Acceptability	For acceptance procedure see ISO 3269.	

5 Designation

Example for the designation of a slotted pan head tapping screw with thread size ST 3,5, nominal length $l = 16$ mm and cone end type C:

Tapping screw ISO 1481 - ST 3,5 × 16 - C

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 1481:1983](https://standards.iteh.ai/catalog/standards/sist/1aa257db-1537-49f3-851b-be3855175a70/iso-1481-1983)

<https://standards.iteh.ai/catalog/standards/sist/1aa257db-1537-49f3-851b-be3855175a70/iso-1481-1983>