



**Methods for Testing and Specification (MTS);
The Test Description Language (TDL);
Part 3: Exchange Format**

[ETSI ES 203 119-3 V1.5.1 \(2022-03\)](https://standards.iteh.ai/catalog/standards/sist/0ee27996-6038-4d28-81fb-878c01b65803/etsi-es-203-119-3-v1-5-1-2022-03)

<https://standards.iteh.ai/catalog/standards/sist/0ee27996-6038-4d28-81fb-878c01b65803/etsi-es-203-119-3-v1-5-1-2022-03>

ReferenceRES/MTS-TDL1193v151

Keywordslanguage, MBT, methodology, testing, TSS&TP,
TTCN-3, UML

ETSI650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our

Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2022.
All rights reserved.

Contents

Intellectual Property Rights	4
Foreword.....	4
Modal verbs terminology.....	4
1 Scope	5
2 References	5
2.1 Normative references	5
2.2 Informative references.....	6
3 Definition of terms, symbols and abbreviations.....	6
3.1 Terms.....	6
3.2 Symbols.....	6
3.3 Abbreviations	6
4 Basic principles	6
4.1 Introduction	6
4.2 Document Structure.....	7
4.3 Notational Conventions	7
4.4 Conformance.....	7
5 TDL XMI Schema.....	8
5.1 TDL XMI Schema Production Rules	8
5.1.1 Overview	8
5.1.2 TDL metaclass Element.....	8
5.1.3 Import statements.....	9
5.1.4 Representation of the TDL meta-model.....	9
5.1.5 Specifics on the TDL metaclass <i>Element</i>	10
5.2 Examples	10
5.2.1 TDL metaclass <i>Element</i>	10
5.2.2 Enumerations	11
5.2.3 Metaclasses	11
5.2.4 Multiple inheritance.....	12
6 TDL XMI Document Serialization.....	12
6.1 TDL XMI Document Production Rules	12
6.1.1 TDL XMI Document Header Structure	12
6.1.2 TDL XMI Document Content Structure	13
6.1.3 Cross-document element references	13
6.2 Examples	14
6.2.1 TDL XMI Document Header Structure Example	14
6.2.2 TDL XMI Document Content Structure Examples	14
6.2.2.1 Instances of TDL metaclasses	14
6.2.2.2 Compositional references to TDL metaclasses	14
6.2.2.3 Non-compositional references to TDL metaclasses	15
6.2.2.4 Instance of TDL metaclasses with simple type properties	16
6.2.2.5 Handling of default values for properties.....	17
6.2.2.6 Cross-document references	17
Annex A (normative): Technical Representation of the TDL XMI Schema	19
Annex B (informative): Bibliography.....	20
History	21

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Foreword

(standards.iteh.ai)

This final draft ETSI Standard (ES) has been produced by ETSI Technical Committee Methods for Testing and Specification (MTS), and is now submitted for the ETSI standards Membership Approval Procedure.

The present document is part 3 of a multi-part deliverable. Full details of the entire series can be found in part 1 [1].

1-2022-03

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document specifies the exchange format of the Test Description Language (TDL) in the form of an XML Schema derived from the TDL meta-model [1]. The intended use of the present document is to serve as the specification of the format used for exchange of model instances and tool interoperability between TDL-compliant tools.

NOTE: OMG®, UML®, OCL™ and UTP™ are the trademarks of OMG (Object Management Group). This information is given for the convenience of users of the present document and does not constitute an endorsement by ETSI of the products named.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference/>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

[1] ETSI ES 203 119-1 (V1.6.1): "Methods for Testing and Specification (MTS); The Test Description Language (TDL); Part 1: Abstract Syntax and Associated Semantics".

[2] OMG®: "OMG Meta Object Facility™ (MOF) Core Specification", Version 2.4.2, formal/2014-04-03.

NOTE: Available at <https://standards.iteh.ai/catalog/standards/sist/0ee27996-0036-4d28-81d6-b78c01665867-etsi-es-203-119-3-v1-5-1-2022-03> or <http://www.omg.org/spec/MOF/2.4.2/>.

[3] OMG®: "OMG XML Metadata Interchange™ (XMI) Specification", Version 2.4.2, formal/2014-04-04.

NOTE: Available at <http://www.omg.org/spec/XMI/2.4.2/>.

[4] W3C® Recommendation 26 November 2008: "Extensible Markup Language (XML) 1.0 (Fifth Edition)".

NOTE: Available at <http://www.w3.org/TR/REC-xml/>.

[5] Recommendation ITU-T X.667: "Information technology - Procedures for the operation of object identifier registration authorities: Generation of universally unique identifiers and their use in object identifiers".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

Not applicable.

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the following terms apply:

TDL XMI document: XMI document that represents the serialization of a TDL model

TDL XMI Schema: XMI Schema that describes valid TDL XMI documents

XMI document: XML document that represents the serialization of a MOF model

XMI Schema: XML Schema definition that describes valid XMI documents

3.2 Symbols

Void.

[ETSI ES 203 119-3 V1.5.1 \(2022-03\)](https://standards.iteh.ai/catalog/standards/sist/0ee27996-6038-4d28-81fb-878c01b65803/etsi-es-203-119-3-v1-5-1-2022-03)

<https://standards.iteh.ai/catalog/standards/sist/0ee27996-6038-4d28-81fb-878c01b65803/etsi-es-203-119-3-v1-5-1-2022-03>

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

EBNF	Extended Backus-Naur Form
MOF	Meta-Object Facility™
TDL	Test Description Language
URI	Uniform Resource Identifier
UUID	Universal Unique Identifier
XMI	XML Metadata Interchange
XML	eXtensible Markup Language
XSD	XML Schema Definition

4 Basic principles

4.1 Introduction

XMI is the serialization format for persistence and interchange of TDL models. XMI stands for XML Metadata Interchange and describes a unified way to serialize, persist, exchange and de-serialize MOF-based models [2]. The XMI specification [3] describes both production rules to create an XMI Schema and an XMI document for a MOF model.

The present document describes the production rules for both a TDL XMI Schema according to the TDL meta-model definition and TDL XMI documents for the serialization of TDL models. A TDL XMI Schema is useful to validate whether a TDL XMI document complies with the serialization rules specified in the present document. A complete validation of the represented TDL model cannot be performed solely with the TDL XMI Schema due to additional semantics introduced by MOF and XMI compared to XML Schema. Validation of TDL XMI documents shall be done in a two-step approach:

- Lexical (syntactical) validation based on the TDL XMI Schema: this validation step assures that XMI documents abide by the serialization rules for TDL models as described by the present document.
- Semantical validation based on the TDL meta-model definition: while deserializing TDL XMI documents, the modelling tool shall perform semantics checks based on the specification of the TDL meta-model and the additional XMI information.

The lexical validation is optional, since it only serves the purpose of syntactically assuring that a TDL XMI document is valid in terms of structure. Semantical validation is always required to ensure that the XMI document is a valid serialization of a TDL model. Due to the nature of the lexical validation, it is possible to produce valid TDL XMI documents with respect to the TDL XMI Schema but invalid TDL XMI documents with respect to the TDL meta-model specification.

4.2 Document Structure

The present document defines the exchange format for TDL model instances by means of a TDL XMI schema. It is structured as follows:

- Clause 5 "TDL XMI Schema" describes the rules that are applied for the production of a valid TDL XMI Schema according to TDL meta-model.
- Clause 6 "TDL XMI Document Serialization" describes the production rules that shall be applied when serializing TDL models. This clause contains a number of examples to comprehensively illustrate the serialization of various TDL elements.
- Annex A specifies the canonical TDL XMI Schema based on the current TDL meta-model specification [1].

4.3 Notational Conventions

For the scope of the present document, the following notational conventions apply:

- Elements from the TDL meta-model or MOF model or XMI model are typeset in italic, e.g. the property *is Optional* of *Member* has the default value *false*.
- Elements from XML or XML Schema are typeset in the monospaced font Courier, e.g. the `complexType` declaration.

4.4 Conformance

TDL XMI documents shall be valid and well formed as defined by the XML recommendation [4].

TDL XMI documents shall be syntactically valid according the TDL XMI Schema described in the present document.

TDL XMI documents shall be semantically valid according the TDL meta-model specification.

5 TDL XMI Schema

5.1 TDL XMI Schema Production Rules

5.1.1 Overview

The TDL XMI Schema production rules refine the general XMI Schema derivation rules [3]. The TDL XMI Schema production rules unify the way in which TDL XMI documents shall be represented. Since XMI is more expressive than XML Schema in some parts which are relevant for MOF-based models, the following rules clarify how a TDL XMI Schema copes with the higher expressiveness of XMI compared to XML Schema:

- Multiple inheritance: Multiple inheritance is not required for the TDL XMI Schema.
- Identification: Element identification is based on the XMI attribute `ID` as specified in the XMI specification [3]. The value of an element's `ID` shall be derived according to the algorithm for generating universally unique identifier (UUID) specified in Recommendation ITU-T X.667 [5].
- Differences: TDL XMI Schema does not support the XMI elements *Difference*, *Add*, *Replace*, *Delete*.
- Bidirectionality: Bidirectional associations (i.e. association ends that have an opposite association end that can be directly navigated from each other) are resolved into two associations.
- The TDL XMI Schema described in the present document should not be used for the generation of the MOF-based TDL meta-model.

The structure of the TDL XMI Schema document complies with the XMI specification and contains the following concepts:

- An XML version processing instruction with an encoding character set information, e.g. `<?XML version="1.0" encoding="UTF-8">`.
- Any other valid XML processing instructions.
- An XML schema element, i.e. the root of the XML Schema document.
- An import XML element for the XMI namespace.
- Any other valid import XML elements to other referenced XML Schema documents.
- Declarations of concepts for the TDL meta-model.

5.1.2 TDL metaclass Element

The TDL XMI Schema element (root element of the TDL XMI Schema definition) has to comply with the following rules:

- The namespace declaration of XML Schema shall be present and set to `xsd="http://www.w3.org/2001/XMLSchema"`
- The namespace declaration of XMI shall be present and set to `xmi="http://www.omg.org/XMI"`
- The namespace declaration of the TDL meta-model shall be present and set to `tdl="http://www.etsi.org/spec/TDL/1.6.1"`
- The target namespace declaration shall be the same as the namespace declaration for the TDL meta-model

5.1.3 Import statements

For the definition of import statements, the following rules shall be applied:

- An import of the fixed declarations that are mandatory for every XMI schema shall be given as first import statement after the XMI Schema element. These declarations are in the namespace <http://www.omg.org/spec/XMI/20131001>. For further information about the fixed declarations of the XMI schema element, refer to the XMI specification [3], clause "XMI Document and Schema Design Principles".
- Import elements for other XML Schema documents are allowed as long as they do not contradict with the concepts provided by the TDL meta-model or rules specified for the TDL XMI Schema document.

5.1.4 Representation of the TDL meta-model

The declaration of the concepts contained in the TDL meta-model shall comply with the following rules:

- **Metaclasses** are represented as a combination of the XML Schema elements `complexType` and `element` where `complexType` specifies the metaclass structure and `element` its concrete use in a certain situation. The use of `element` is required for expressing containment relationships.
- **Abstract metaclasses** are represented similar to concrete metaclasses, but with `abstract="true"` set in the `complexType` declaration.
- **Enumerations** are represented as XML Schema `simpleType` elements. A restriction is used with `base` set to XML Schema `xsd:NCName`.
- **Metaclass properties in general** represent properties that are typed by MOF primitive types (e.g. *String*, *Integer*, etc.), TDL enumerations, or TDL metaclasses. They are either represented as an XML Schema `element` or `attribute`, depending on the multiplicity of the metaclass property, the type of the metaclass property, and whether the type of property is contained within in the same XMI file as the property or not. In either case, the name shall be set to the property's *name*. The *type* shall be set to the XML Schema type declaration corresponding to the property's type.
- **Metaclass properties that refer to metaclasses in a different XMI file** are always serialized as nested elements. These properties are represented as XML schema elements `element`. Such an `element` declaration is embedded in a choice model group with `minOccurs="0"` and `maxOccurs="unbounded"` attributes within the `complexType` declaration representing the containing metaclass of the property.
- **Metaclass properties of simple type** represent properties that are typed by MOF primitive types (e.g. *String*, *Integer* etc.) or TDL enumerations. They are represented either as an XML Schema `element` or `attribute`, depending on the multiplicity of the metaclass property. The MOF primitive type to XML Schema simple type mapping is defined as follows:
 - *MOF::String* -> `xsd:string`
 - *MOF::Integer* -> `xsd:integer`
 - *MOF::Boolean* -> `xsd:Boolean`
 - *MOF::Real* -> `xsd:decimal`
- **Metaclass properties of simple type with an upper bound of 1** are represented as `attribute` elements of the `complexType` declaration representing the property's containing metaclass. If the lower value of the metaclass property is 1 (i.e. the property value is mandatory), the `attribute`'s attribute `use="required"` shall be set.

- **Metaclass properties of simple type with an upper bound greater than 1** are represented as `element` elements. Such `element` declarations are embedded in a choice model group with `minOccurs="0"` and `maxOccurs="unbounded"` attributes within the `complexType` declaration representing the containing metaclass of the property. Mixed use of both an `attribute` and an `element` elements for the same metaclass property is not permitted.
- **Metaclass properties of metaclass type composing metaclasses** represent properties of a TDL metaclass that are typed by another TDL metaclass with compositional relationship among those metaclasses. These properties are represented as XML schema `element` elements. Such `element` declarations are embedded in a choice model group with `minOccurs="0"` and `maxOccurs="unbounded"` attributes within the `complexType` declaration representing the containing metaclass of the property.
- **Metaclass properties of metaclass type referencing metaclasses** represent properties of a metaclass that are typed by another TDL metaclass with a non-compositional relationship among those metaclasses. These properties are represented as XML Schema `attribute` elements, or `element` elements if the referenced metaclass is contained in a different XMI file. The `type` attribute shall be set to `xsd:string` in case of `attribute` elements, and to the `complexType` declaration in case of `element` elements. Referencing attributes that represent collections shall list the `xmi:id` of each referenced metaclass in a white-space separated list.
- **Single inheritance** is represented by the XML Schema extension with `base` set to the qualified name of the general metaclass.
- **Multiple inheritance** is not permitted by XML Schema and is not required for the TDL XMI Schema production.
- **Associations** of the TDL meta-model are not represented in the TDL XMI Schema.

5.1.5 Specifics on the TDL metaclass *Element*

The TDL metaclass *Element* represents the single root metaclass for any other TDL metaclass. As such, it declares both XMI-specific and TDL-specific `attribute` elements which are inherited by all other TDL metaclasses. This clause describes the rules that shall be applied to the TDL metaclass *Element*:

- The *Element* `complexType` declaration contains the XMI-specific `attribute` elements for object identity, i.e.:

```
<xsd:attribute ref="xmi:id"/>
<xsd:attributeGroup ref="xmi:ObjectAttribs"/>
```

The attribute group `xmi:ObjectAttribs` provide additional `attribute` elements from the XMI namespace to each TDL element. These `attribute` elements grouped under the umbrella of the above-mentioned name are used for the XMI object identity via `xmi:id`, type identification via `xmi:type`, and cross-document references via `xmi:href`.

- The *Element* `complexType` declaration contains the XMI:Extension element in its structure, i.e.:

```
<xsd:choice
...
  <xsd:element ref="xmi:Extension"/>
</xsd:choice>
```

Both the XMI-specific concepts for object identity and general extensibility are inherited by any other metaclass definition of the TDL meta-model, since every metaclass in the TDL meta-model is either an immediate or a transitive subclass of the TDL metaclass *Element*.

5.2 Examples

5.2.1 TDL metaclass *Element*

The example below shows the declaration of the TDL metaclass *Element*. *Element* has a special meaning in the meta-model, since it represents the superclass of all other TDL metaclasses.

TDL meta-model representation




Figure 1: TDL Element metaclass definition (simplified)

XML Schema representation

```
<xsd:complexType abstract="true" name="Element">
  <xsd:choice maxOccurs="unbounded" minOccurs="0">
    <xsd:element name="comment" type="tdl:Comment"/>
    <xsd:element name="annotation" type="tdl:Annotation"/>
    <xsd:element ref="xmi:Extension"/>
  </xsd:choice>
  <xsd:attribute ref="xmi:id"/>
  <xsd:attributeGroup ref="xmi:ObjectAttribs"/>
  <xsd:attribute name="name" type="xsd:string"/>
</xsd:complexType>

<xsd:element name="Element" type="tdl:Element"/>
```

5.2.2 Enumerations

The example below shows the XML Schema representation of enumerations defined in the TDL meta-model.

TDL meta-model representation

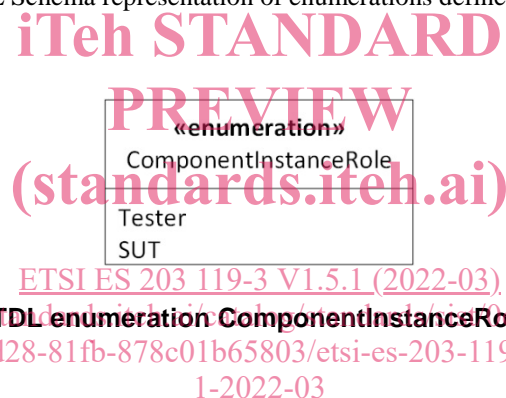


Figure 2: TDL enumeration ComponentInstanceRole example

XML Schema representation

```
<xsd:simpleType name="ComponentInstanceRole">
  <xsd:restriction base="xsd:NCName">
    <xsd:enumeration value="SUT"/>
    <xsd:enumeration value="Tester"/>
  </xsd:restriction>
</xsd:simpleType>
```

5.2.3 Metaclasses

The example below demonstrates the representation of several aspects related to more complex metaclass definitions. It shows both the definition of simple type properties (the *role* property of the metaclass *ComponentInstance*), compositional associations, as well as reference associations. Simple type property declarations and reference associations do not differ from each other in the corresponding XML Schema representation except by their type.