INTERNATIONAL STANDARD

ISO 13350

Second edition 2015-10-01

Fans — Performance testing of jet fans

Ventilateurs — Essai de performance des ventilateurs accélérateurs

iTeh Standards (https://standards.iteh.ai) Document Preview

ISO 13350:2015



iTeh Standards (https://standards.iteh.ai) Document Preview

ISO 13350:2015

https://standards.iteh.ai/catalog/standards/iso/de60e61e-9d09-4092-bcbe-1c2f08997533/iso-13350-2015



COPYRIGHT PROTECTED DOCUMENT

© ISO 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Ch. de Blandonnet 8 • CP 401 CH-1214 Vernier, Geneva, Switzerland Tel. +41 22 749 01 11 Fax +41 22 749 09 47 copyright@iso.org www.iso.org

Contents				
Forev	word		v	
Intro	ductio	on	vii	
1		oe		
2	-	native references		
3		ns and definitions bols and abbreviated terms		
4				
5		racteristics to be measured		
	5.1 5.2	GeneralThrust		
	5.3	Input power		
	5.4	Sound levels		
	5.5	Vibration velocity		
	5.6	Volume flowrate		
6	Instr	6		
U	6.1	rumentation and measurements Dimension and areas		
	6.2	Rotational speed		
	6.3	Thrust	6	
		6.3.1 Force balance systems	6	
		6.3.2 Force transducers	6	
	6.4	Input power	7	
	6.5	Sound level		
	6.6 6.7	Vibration velocityVolume flowrate		
	0.7	6.7.1 Instruments for the measurement of pressure		
		6.7.2 Instruments for the measurement of temperature	7	
7	Dete	ermination of thrust ISO 133502015	7	
ns://sta	7.1	i General		
	7.2	Suspended configuration		
	7.3	Supported configuration		
	7.4	Test procedures		
	7.5	Test enclosure	13	
8	Dete	rmination of sound level		
	8.1	General		
	8.2	Test arrangement		
	8.3	Enclosure suitability		
	8.4	Measurement procedure		
9	Determination of vibration velocity			
	9.1	General		
	9.2 9.3	Test procedure		
	9.3 9.4	Test procedureAcceptance vibration velocity		
10		-		
10	10.1	rmination of flowrate General		
	10.1	Upstream chamber method		
	10.2	Upstream Pitot traverse method		
	10.4	Directly connected flowrate-measuring device		
11		entation of results		
	11.1	Product description		
	11.2	Product performance		

ISO 13350:2015(E)

12	Tolerances and conversion rules		21
	12.1	Tolerances	21
	12.2	Conversion rules	21
Anne	x A (inf	formative) Illustration of reference sound source	2 4
Anne	x B (inf	formative) Correction of sound pressure levels	25
Anne	x C (inf	Formative) Non-dimensional coefficients	26
Anne	x D (no	ormative) Efficiency based on thrust measurements	28
Biblio	ograph	y	30

iTeh Standards (https://standards.iteh.ai) Document Preview

ISO 13350:2015

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document can be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC 117, Fans.

This second edition cancels and replaces the first edition (ISO 13350:1999) which has been technically revised. The main changes are the following:

- General (dated references on standards updated, e.g. ISO 5801:2007);
- Clause 2 "Normative references" (references supplemented and updated); 7533/iso-13350-2015
 - <u>Clause 3</u> "Terms and definitions" (addition of 3.2.1 "gross fan outlet area", 3.5.1 "motor input power", 3.5.2 "impeller power", 3.8.2 "thrust/motor input power ratio");
 - <u>Figure 1</u> "Gross and effective fan outlet areas" (modified by marking of "gross fan outlet area A_2 ");
 - <u>Clause 4</u> "Symbols and abbreviated terms" (supplemented and updated);
 - <u>6.4</u> "Input power" (correction for density);
 - 7.1 "Determination of thrust" (correction for density);
 - 7.4 "Test procedures" (change of recommended calibration intervals);
 - Figure 7 "Thrust measuring enclosure" (modified by reducing the minimum distance between fan casing and floor/ceiling/wall);
 - <u>8.1</u> "Determination of sound level" (Introduction of possibility to use other International Standards e.g. ISO 13347);
 - <u>8.3</u> "Enclosure suitability" (requirement on running speed of the reference sound source deleted);
 - <u>9.2</u> "Test arrangement" for determination of vibration velocity (Figure 9 "Vibration measuring position for jet fans" and requirement to use this configuration deleted);
 - 9.3 "Test procedure" (general reference to ISO 14695);

ISO 13350:2015(E)

- 10.2 "Upstream chamber method" ("venturi nozzle" replaced by "bellmouth");
- <u>10.4</u> "Directly connected flowrate-measuring" ("venturi nozzle" replaced by "bellmouth");
- <u>11.2</u> "Product performance" (reference to density 1,2 kg/m³ added);
- <u>Annex C</u> (informative) (change of title: "Conversion rules" replaced by "Non-dimensional coefficients");
- Annex C (informative) (several character changed);
- Annex C (informative) (subclause on "Non-dimensional thrust/power ratio" added);
- <u>Annex D</u> (normative) (new normative Annex on "Efficiency based on thrust measurements").

iTeh Standards (https://standards.iteh.ai) Document Preview

ISO 13350:2015

Introduction

The need for a new edition of ISO 13350 has been evident for some time. The use of the so-called jet fan to assist in the control of quality of air in vehicle and train tunnels has become increasingly popular. Longitudinal methods of ventilation can show advantages in both capital cost and running cost compared to alternative systems. Smoke and pollution control in emergency conditions can be readily provided. Jet fans can also be used for ventilation and smoke control in enclosed car parks.

This International Standard deals with the determination of those performance criteria essential to the correct application of jet fans. In describing the test and rating procedures, numerous references are made to ISO 5801 as well as to other relevant International Standards.

iTeh Standards (https://standards.iteh.ai) Document Preview

ISO 13350:2015

iTeh Standards (https://standards.iteh.ai) Document Preview

ISO 13350:2015

Fans — Performance testing of jet fans

1 Scope

This International Standard deals with the determination of those technical characteristics needed to describe all aspects of the performance of jet fans as defined in ISO 13349. It does not cover those fans designed for ducted applications, nor those designed solely for air circulation, e.g. ceiling fans and table fans.

The test procedures described in this International Standard relate to laboratory conditions. The measurement of performance under on-site conditions is not included.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1940-1, Mechanical vibration — Balance quality requirements for rotors in a constant (rigid) state — Part 1: Specification and verification of balance tolerances

ISO 3744, Acoustics — Determination of sound power levels and sound energy levels of noise sources using sound pressure — Engineering methods for an essentially free field over a reflecting plane

ISO 5801:2007, Industrial fans — Performance testing using standardized airways

ISO 13347 (all parts), Industrial fans — Determination of fan sound power levels under standardized laboratory conditions

ISO 13349, Fans — Vocabulary and definitions of categories

ISO 14694, Industrial fans — Specifications for balance quality and vibration levels

ISO 14695, Industrial fans — Method of measurement of fan vibration

IEC 60034-2-1, Rotating electrical machines — Part 2-1: Standard methods for determining losses and efficiency from tests (excluding machines for traction vehicles)

IEC 60034-14, Rotating electrical machines — Part 14: Mechanical vibration of certain machines with shaft heights 56 mm and higher — Measurement, evaluation and limits of the vibration severity

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 13349, ISO 5801 and the following apply.

3.1

effective fan dynamic pressure

 $p_{\rm d}$

conventional quantity representative of the dynamic component of the fan output, calculated, in the particular case of a jet fan, from the effective fan outlet velocity and the inlet density

Note 1 to entry: The effective fan dynamic pressure will not be the same as the average of the dynamic pressures across the section because it excludes from consideration that part of the dynamic energy flux, which is due only to departures from uniform axial velocity distribution.

3.2.1

gross fan outlet area

 A_2

surface plane bounded by the downstream extremity of the air-moving device

Note 1 to entry: Gross fan outlet area is, by convention, taken as the gross area in the outlet plane inside the casing or duct or silencer, (see Figure 1) without taken into account any obstructions inside the fan outlet.

322

effective fan outlet area

Aafı

<jet fan> outlet area with deductions for motors, fairings, or other obstructions (in the particular case
of a jet fan)

Note 1 to entry: If the silencer centrebody reaches the outlet plane of the fan, then, the effective fan outlet area is defined as the annulus area at the fan outlet plane, as shown in Figure 1a).

Note 2 to entry: If the fan has a silencer without centrebody [see <u>Figure 1</u>b)], the effective fan outlet area will be close to the cross-sectional area inside the silencer in order to clear any exit bellmouth form.

Note 3 to entry: If the centrebody (motor or silencer core) does not extend to the outlet plane, the effective fan outlet area will approach the annulus area between the casing and the motor, but with some increase, as defined in <u>Figure 1c</u>), for the distance between the centrebody and the outlet. Where the motor is on the upstream side, <u>Figure 1c</u>) is applied to the impeller hub rather than the motor, as illustrated.

Note 4 to entry: For comparisons within the scope of research and development, alternative definitions have been used with some success.

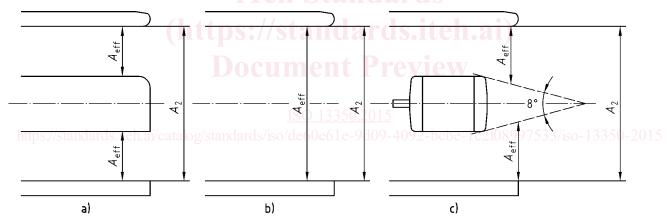


Figure 1 — Gross and effective fan outlet areas

3.3

effective fan outlet velocity

Veff

velocity calculated from thrust at standard conditions, the standard air density, and the effective fan outlet area

Note 1 to entry: See 11.2.

3.4

fan outlet velocity

V2

velocity calculated from the thrust at standard conditions, divided by gross fan outlet area, A_2

3.5.1

motor input power

 P_{e}

electrical power supplied at the terminals of the electric motor drive

3.5.2

impeller power

mechanical power supplied to the impeller of the fan

3.5.3

fan air power

 $P_{\rm u}$

conventional power output at standard conditions; in the particular case of a jet fan, product of inlet volume flow and effective fan dynamic pressure

3.6

impeller tip speed

peripheral speed of the impeller blade tips

3.7

thrust

 $T_{\rm m}$, $T_{\rm c}$

fan thrust measured $(T_{\rm m})$ or calculated $(T_{\rm c})$ in accordance with this International Standard at standard conditions

3.8.1

thrust/impeller power ratio

thrust divided by impeller power Teh Standards

Note 1 to entry: The thrust/impeller power ratio is calculated as $r_r = T_m/P_r$.

thrust divided by motor input power

Note 1 to entry: The thrust/motor input power ratio is calculated as $r_e = T_m/P_e$.

3.9

fan guard

guard designed to prevent the ingestion of relatively large foreign bodies, such as drink cans, and sometimes fitted to the inlet and outlet of jet fans

Note 1 to entry: Guards can have a marked effect on the thrust performance and noise level. Where they are specified, measurements should be made with these guards in place.

3.10

airway in which the air velocity is small compared with that at the fan inlet or outlet

3.11

test enclosure

room, or other space protected from draught, in which the fan and test airways are situated

3.12

impeller balance grade

G grade as specified in ISO 14694

3.13

fan vibration velocity

unfiltered root mean square (r.m.s.) vibration velocity over the frequency range 10 Hz to 10 kHz measured in accordance with this International Standard and with ISO 14695

3.14

fan impeller efficiency

fan air power divided by impeller power

3.15

fan overall efficiency

fan air power divided by motor input power

3.16

sound pressure level

 $L_{\rm p}$

ten times the logarithm to the base 10 of the ratio of the square of the sound pressure radiated by the sound source under test to the square of the reference sound pressure

3.17

sound power level

 L_{W}

ten times the logarithm to the base 10 of the ratio of the sound power radiated by the sound source under test to the reference sound power

3.18

inlet sound power level

sound power level of the fan determined at the fan inlet 11 d 2 r d S

outlet sound power level

sound power level of the fan determined at the fan outlet Preview

3.20

noise frequency range of interest

<general>frequency range including the octave bands with centre frequencies between 63 Hz and | 5 8 000 Hz and the one-third octave bands with centre frequencies between 50 Hz and 10 000 Hz

Symbols and abbreviated terms 4

The following symbols and units shall apply for the parameters listed.

Abbreviated term/represented quantity	Symbol	SI unit
Impeller annulus area	A_{a}	m ²
Gross fan outlet area	A_2	m ²
Effective fan outlet area	$A_{ m eff}$	m ²
Nominal fan diameter	$D_{ m R}$	m
Length of upstream chamber side	D_3	m
Sound pressure level	L_{p}	dB (re 20 μPa)
Average sound pressure level of the measured device	$L_{p(m)}$	dB (re 20 μPa)
Average sound pressure level of the reference sound source	$L_{p(r)}$	dB (re 20 μPa)
Sound power level	L_{W}	dB (re 1 pW)
Inlet sound power level	L_{W1}	dB (re 1 pW)

NOTE: (T) denotes the term or quantity stated to be a function of the thrust (see Annex D). Example: $\eta_e(T)$ is the fan overall efficiency based on thrust.