INTERNATIONAL STANDARD

ISO 12749-4

First edition 2015-08-15

Nuclear energy, nuclear technologies, and radiological protection — Vocabulary —

Part 4: **Dosimetry for radiation processing**

Energie nucleaire, technologies nucleaires, et pmtection radiologique — Vocabulaire —

Partie 4: Dosimetrie pour processue de radiation

Document Preview

ISO 12749-4:2015



iTeh Standards (https://standards.iteh.ai) Document Preview

ISO 12749-4:2015

https://standards.iteh.ai/catalog/standards/iso/f8d30605-c664-4ae6-9554-17f01f36369c/iso-12749-4-2015



COPYRIGHT PROTECTED DOCUMENT

© ISO 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Ch. de Blandonnet 8 • CP 401 CH-1214 Vernier, Geneva, Switzerland Tel. +41 22 749 01 11 Fax +41 22 749 09 47 copyright@iso.org www.iso.org

Contents			Page	
Fore	Foreword			
Intro	ductio	on	v	
1	Scop	ne	1	
2	Structure of the vocabulary		1	
3	Terms and definitions		1	
	3.1	Terms related to dosimetry, dosimetry systems and ionizing radiation		
	3.2	Terms related to dosimeters	5	
	3.3	Terms related to radiation processing	9	
	3.4	Terms related to radiation processing Terms related to measurement	15	
Anne	ex A (in	formative) Methodology used in the development of the vocabulary	19	
Bibliography			25	
Alphahetical Index			26	

iTeh Standards (https://standards.iteh.ai) Document Preview

ISO 12749-4:2015

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC85 *Nuclear energy, nuclear technologies, and radiological protection.*

ISO 12749 consists of the following parts, under the general title *Nuclear energy, nuclear technologies, and radiological protection* — *Vocabulary*:

- *Part 2: Radiological protection*https://standards.icen.al/catalog/standards/iso/f8d30605-c664-4ae6-9554-17f01f36369c/iso-12749-4-2015
- Part 3: Nuclear fuel cycle
- Part 4: Dosimetry for radiation processing

The following part is under preparation:

— Part 5: Nuclear reactors

The following part is planned:

— Part 1: General terminology

Introduction

This part of ISO 12749 provides terms and definitions for concepts for dosimetry related to radiation processing using gamma radiation, X-radiation, or accelerated electrons. Concepts related to the calibration and use of dosimetry systems for operational qualification and performance qualification of commercial radiation processing facilities and for dose monitoring for quality assurance during the routine processing of products are defined. Terminological data are taken from the ISO/ASTM standards developed by ISO TC 85 and ASTM International Committee E61. Care is taken to ensure definitions are consistent with other technically validated documents such as VIM, ICRU and GUM.

Unambiguous communication of nuclear energy concepts is crucial since serious consequences can arise from misunderstandings with regard to standards related to equipment and materials used in nuclear energy activities. Concepts dealing with dosimetry related to radiation processing and procedures for preparation, testing, and using dosimetry systems to determine the absorbed dose are present in all of the ISO/ASTM standards developed by WG3. To avoid misunderstandings, these concepts need to be designated by common terms and described by harmonized definitions.

Conceptual arrangement of terms and definitions is based on concepts systems that show corresponding relationships among nuclear energy concepts. Such arrangement provides users with a structured view of the nuclear energy sector and will facilitate common understanding of all related concepts. Besides, concepts systems and conceptual arrangement of terminological data will be helpful to any kind of user because it will promote clear, accurate and useful communication.

iTeh Standards (https://standards.iteh.ai) Document Preview

ISO 12749-4:2015

iTeh Standards (https://standards.iteh.ai) Document Preview

ISO 12749-4:2015

Nuclear energy, nuclear technologies, and radiological protection — Vocabulary —

Part 4:

Dosimetry for radiation processing

1 Scope

This part of ISO 12749 lists unambiguous terms and definitions for concepts for dosimetry related to radiation processing using gamma radiation, X-radiation, or accelerated electrons. It is intended to facilitate communication and promote common understanding.


2 Structure of the vocabulary

The terminology entries are presented in the conceptual order of the English preferred terms. Both a systematic index and an alphabetical index are included at the end of the standard. The structure of each entry is in accordance with ISO 10241-1.

All the terms included in this part of ISO 12749 deal exclusively with dosimetry for radiation processing. When selecting terms and definitions, special care has been taken to include the terms that need to be defined, it means, either because the definitions are essential to the correct understanding of the corresponding concepts or because some specific ambiguities need to be addressed.

The notes appended to certain definitions offer clarification or examples to facilitate understanding of the concepts described. In certain cases, miscellaneous information is also included, for example, the units in which a quantity is normally measured, recommended parameter values, references, etc.

According to the title, the vocabulary deals with concepts belonging to the general *nuclear energy* field within which concepts in the **dosimetry for radiation processing** subfield are taking into account.

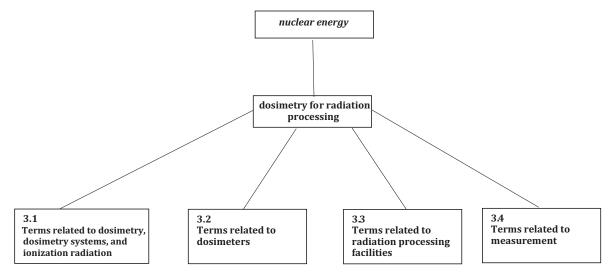

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1 Terms related to dosimetry, dosimetry systems and ionizing radiation

3.1.1

dosimetry

measurement of absorbed dose by the use of a dosimetry system

[SOURCE: ISO/ASTM 52628:2013, 3.1.7]

3.1.2

absorbed dose

D

quotient of the $d\bar{\varepsilon}$ by the dm, where the $d\bar{\varepsilon}$ is the mean energy imparted by ionization radiation to matter of mass dm

Note 1 to entry: It is expressed as

 $D = d\overline{\varepsilon} / dm$

Note 2 to entry: The special name for the unit of absorbed dose is gray (Gy), where 1 gray is equivalent to the absorption of 1 J per kilogram of a specified material (1 Gy = 1 J / kg).

[SOURCE: ICRU 85a, 5.2.5, October 2011, modified]

Note 3 to entry: In most radiation processing applications, absorbed dose is in terms of absorbed dose to water.

3.1.3

dosimetry system

used for measuring absorbed dose, consisting of dosimeters, measurement instruments and their associated reference standards, and procedures for the system's use

[SOURCE: ISO/ASTM 52628:2013, 3.1.8, modified]

3.1.3.1

primary standard dosimetry system

designated or widely acknowledged as having the highest metrological qualities and whose value is accepted without reference to other standards of the same quantity

[SOURCE: ISO/ASTM 52628:2013, 3.1.11, modified]

3.1.3.2

reference standard dosimetry system

generally having the highest metrological quality available at a given location or in a given organization, from which measurements made there are derived

[SOURCE: ISO/ASTM 52628:2013, 3.1.13, modified]

3.1.3.3

routine dosimetry system

calibrated against a reference standard dosimetry system and used for routine absorbed dose measurements, including dose mapping and process monitoring

[SOURCE: ISO/ASTM 52628:2013, 3.1.16, modified]

3.1.3.4

transfer standard dosimetry system

used as an intermediary to calibrate other dosimetry systems, usually routine dosimetry system

[SOURCE: ISO/ASTM 52628:2013, 3.1.18, modified]

3.1.4

ionizing radiation

consists of charged particles or uncharged particles, or both, that as a result of physical interaction, creates ions by primary or secondary processes

Note 1 to entry: Charged particles could be positrons or electrons, and uncharged particles could be X-radiation or gamma radiation.

[SOURCE: ASTM E170, 14a, modified]

3.1.4.1

gamma radiation

electromagnetic radiation emitted in the process of nuclear transition

[SOURCE: IEC 60050, modified]

3.1.4.1.1 activity

Α

quotient of -dN by dt, where dN is the mean change in the number of nuclei in that energy state due to spontaneous nuclear transformations in the time interval dt

Note 1 to entry: Activity of an amount of radionuclide in a particular energy state at a given time.

Note 2 to entry: It is expressed as

$$A = -dN/dt$$

Note 3 to entry: The special name for the unit of activity is becquerel (Bq), where 1 Bq = 1 s⁻¹ and 1 Ci = 3.7×10^{10} Bq.

[SOURCE: ICRU 85a, 6.2, October 2011, modified]

3.1.4.1.2

decay constant

quotient of dN/N by dt, where dN/N is the mean fractional change in the number of nuclei in that energy state due to spontaneous nuclear transformations in the time interval dt

Note 1 to entry: Decay constant of a radionuclide in a particular energy state.

Note 2 to entry: It is expressed as

$$\lambda = -\frac{\mathrm{d}N / N}{\mathrm{d}t}$$

[SOURCE: ICRU 85a, 6.1, October 2011, modified]

3.1.4.1.3

half-life

 $T_{1/2}$

time taken for the activity of an amount of radionuclide to become half its initial value

Note 1 to entry: Half-life of a radionuclide in a particular energy state.

Note 2 to entry: $T_{1/2} = \ln 2/\lambda$, where λ is the *decay constant* (3.1.4.1.2).

ISO 12749-4:2015(E)

3.1.4.2

X-radiation

X-ray

ionizing electromagnetic radiation, which includes both bremsstrahlung and the characteristic radiation emitted when atomic electrons make transitions to more tightly bound states

Note 1 to entry: In radiation processing applications, the principal X-radiation is bremsstrahlung.

[SOURCE: ISO/ASTM 51608:2015, 3.2.1]

3.1.4.2.1

bremsstrahlung

broad-spectrum electromagnetic radiation emitted when an energetic charged particle is influenced by a strong electric or magnetic field, such as that in the vicinity of an atomic nucleus

[SOURCE: ISO/ASTM 51608:2015, 3.1.4]

3.1.4.3

electron beam

stream of electrons generated by an electron accelerator

3.1.5

calibration

set of operations that establish, under specified conditions, the relationship between values of quantities indicated by a measuring instrument or measuring system, or values represented by a material measure or a reference material, and the corresponding values realized by standards

[SOURCE: ISO/ASTM 52628:2013, 3.1.3] (https://standards.iteh.ai)

3.1.5.1

approved laboratory

recognized national metrology institute; or has been formally accredited to ISO/IEC 17025; or has a quality system consistent with the requirements of ISO/IEC 17025

Note 1 to entry: A recognized national metrology institute or other calibration laboratory accredited to ISO/IEC 17025 should be used in order to ensure traceability to a national or international standard. A calibration certificate provided by a laboratory not having formal recognition or accreditation will not necessarily be proof of traceability to a national or international standard.

[SOURCE: ISO/ASTM 51261:2013, 3.1.1, modified]

3.1.5.1.1

accredited dosimetry calibration laboratory

dosimetry laboratory with formal recognition by an accrediting organization that the dosimetry laboratory is competent to carry out specific activities which lead to the calibration or calibration verification of dosimetry systems in accordance with documented requirements of the accrediting organization

[SOURCE: ISO/ASTM 52628:2013, 3.1.2]

3.1.5.2

reference standard radiation field

calibrated radiation field, generally having the highest metrological quality available at a given location or in a given organization, from which measurements made there are derived

[SOURCE: ISO/ASTM 52628:2013, 3.1.14]

3.1.5.3

charged-particle equilibrium

electron equilibrium

condition in which the kinetic energy of charged particles, excluding rest mass, entering an infinitesimal volume of the irradiated material equals the kinetic energy of charge particles emerging from it

Note 1 to entry: This is referred to as electron equilibrium in the case of electrons set in motion by photon irradiation of a material.

[SOURCE: ISO/ASTM 51261:2013, 3.1.4]

3.1.6

calibration curve

expression of the relation between indication and corresponding measured quantity value

Note 1 to entry: In radiation processing standards, term "dosimeter response" is generally used for "indication".

[SOURCE: VIM:2008, 4.31]

3.1.7

verification

provision of objective evidence that a given item fulfils specified requirements

[SOURCE: VIM: 2008, 2.44]

3.2 Terms related to dosimeters

3.2.1

dosimeter

device that, when irradiated, exhibits a quantifiable change that can be related to absorbed dose in a given material using appropriate measurement instruments and procedures

[SOURCE: ISO/ASTM 52628:2013, 3.1.4]

3.2.2

<u>180 12/49-4:2015</u>

dosimeter batch /catalog/standards/iso/f8d30605-c664-4ae6-9554-17f01f36369c/iso-12749-4-2015

quantity of dosimeters made from a specific mass of material with uniform composition, fabricated in a single production run under controlled, consistent conditions and having a unique identification code

[SOURCE: ISO/ASTM 51276:2012, 3.1.3]

3.2.2.1

dosimeter stock

part of a dosimeter batch held by the user

[SOURCE: ISO/ASTM 51276:2012, 3.1.5]

3.2.3

dosimeter set

one or more dosimeters used to measure the absorbed dose at a location and whose average reading is used to determine absorbed dose at that location

[SOURCE: ISO/ASTM 51940:2013, 3.1.9]

3.2.4

dosimeter response

reproducible, quantifiable effect produced in the dosimeter by ionizing radiation

Note 1 to entry: The response value may be obtained from such measurements as optical absorbance, thickness, mass, peak-to-peak distance in EPR spectra, or electropotential between solutions and thermoluminescent output.