

ETSI TS 123 283 V16.7.0 (2022-03)



iTeh STANDARD

LTE;

Mission Critical Communication Interworking with Land Mobile

Radio Systems

(3GPP TS 23.283 version 16.7.0 Release 16)

[ETSI TS 123 283 V16.7.0 \(2022-03\)](https://standards.iteh.ai/catalog/standards/sist/ee8a4226-bf1c-40fc-898e-68a820a063fc/etsi-ts-123-283-v16-7-0-2022-03)

<https://standards.iteh.ai/catalog/standards/sist/ee8a4226-bf1c-40fc-898e-68a820a063fc/etsi-ts-123-283-v16-7-0-2022-03>



Reference

RTS/TSGS-0623283vg70

Keywords

LTE

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our

Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2022.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

(standards.iteh.ai)

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document **"shall"**, **"shall not"**, **"should"**, **"should not"**, **"may"**, **"need not"**, **"will"**, **"will not"**, **"can"** and **"cannot"** are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"must" and **"must not"** are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology	2
Foreword	9
1 Scope	10
2 References	10
3 Definitions, symbols and abbreviations	10
3.1 Definitions	10
3.2 Abbreviations	11
4 Introduction	11
5 Assumptions and architectural requirements	11
5.1 Key management	11
5.2 Packet format	12
6 Involved business relationships	12
7 Functional model	12
7.1 General	12
7.2 Functional model description	12
7.3 Functional entities description	13
7.3.1 IWF	13
7.4 Reference points	13
7.4.1 Reference point IWF-1 (between the IWF and the MCPTT server)	13
7.4.2 Reference point IWF-2 (between the IWF and the MCData server)	13
7.4.3 Reference point IWF-3 (between the IWF and the group management server)	14
8 Identities	14
8.1 Identity mapping	14
9 Application of functional model to deployments	14
10 Procedures and information flows	14
10.1 Affiliation	14
10.1.1 Information flows for affiliation	14
10.1.1.1 General	14
10.1.1.2 IWF group affiliation request	14
10.1.1.3 IWF group affiliation response	15
10.1.1.4 IWF group de-affiliation request	15
10.1.1.5 IWF group de-affiliation response	15
10.1.2 Affiliation procedures	16
10.1.2.1 General	16
10.1.2.2 Group affiliation to a group defined in the MC system	17
10.1.2.3 Group de-affiliation from a group defined in the MC system	18
10.1.2.4 Group affiliation to group defined in the LMR system	19
10.1.2.5 Group de-affiliation from a group defined in the LMR system	20
10.2 Group management	21
10.2.1 Information flows for group management	21
10.2.1.1 General	21
10.2.1.2 IWF group regroup teardown notification	21
10.2.1.3 IWF group regroup teardown notification response	21
10.2.1.4 IWF group regroup request	21
10.2.1.5 IWF group regroup response	21
10.2.1.6 IWF group regroup notification	22
10.2.1.7 IWF group regroup notification response	22
10.2.1.8 IWF group information request	22

10.2.1.9	IWF group information response	22
10.2.1.10	IWF group information provision request.....	23
10.2.1.11	IWF group information provision response	23
10.2.1.12	IWF group information subscribe request.....	23
10.2.1.13	IWF group information subscribe response	23
10.2.1.14	IWF group information notify request	24
10.2.1.15	IWF group information notify response	24
10.2.2	Group regrouping.....	24
10.2.2.1	General	24
10.2.2.2	MC system initiates the group regroup	24
10.2.2.3	IWF initiates the group regroup	26
10.2.2.4	Ownership of the group regroup	27
10.2.2.5	Simultaneous group regroup requests from each side of the IWF-1 interface	27
10.2.2.6	Resolution of vocoder and encryption mode for the group regroup.....	27
10.2.3	Group configuration for interworking.....	27
10.2.3.1	Overview.....	27
10.2.3.2	MC system provides group configuration to the IWF.....	28
10.2.3.3	IWF requests group configuration from the MC system.....	28
10.2.3.4	IWF provides group configuration to the MC system.....	29
10.2.3.5	MC system requests group configuration from the IWF.....	30
10.2.3.6	IWF subscribes to group configuration.....	30
10.2.3.7	MC system notifies group configuration.....	31
10.2.3.8	MC system subscribes to group configuration	31
10.2.3.9	IWF notifies group configuration.....	32
10.3	Group call.....	33
10.3.1	General.....	33
10.3.2	Information flows for group call over interworking group.....	33
10.3.2.1	General	33
10.3.2.2	IWF group call request.....	33
10.3.2.3	IWF group call response (IWF – MCPTT server).....	33
10.3.2.4	IWF Group-broadcast group call setup request.....	34
10.3.2.5	IWF Group-broadcast group call setup response	34
10.3.2.6	IWF Group-broadcast group call release request.....	34
10.3.2.7	IWF group-broadcast group call release response.....	35
10.3.2.8	IWF group join request.....	35
10.3.2.9	IWF group join response.....	35
10.3.2.10	IWF group call leave request	36
10.3.2.11	IWF group call leave response	36
10.3.2.12	IWF group call release request.....	36
10.3.2.13	IWF group call release response	37
10.3.2.14	IWF pre-configured regroup request	37
10.3.2.15	IWF pre-configured regroup response	37
10.3.2.16	IWF pre-configured regroup cancel request.....	37
10.3.2.17	IWF pre-configured regroup cancel response	38
10.3.2.18	IWF pre-configured regroup reject (IWF – MCPTT server, MCPTT server - IWF).....	38
10.3.3	Pre-arranged group call.....	38
10.3.3.1	General	38
10.3.3.2	Group call setup initiated by MCPTT user on an interworking group defined in MCPTT system.....	39
10.3.3.3	Group call setup initiated by LMR user on an interworking group defined in MCPTT system.	40
10.3.3.4	Group call setup initiated by MCPTT user on an interworking group defined in the LMR system.....	41
10.3.3.5	Group call setup initiated by LMR user on an interworking group defined in the LMR system.	43
10.3.3.6	Encrypted group call with transcoding.....	44
10.3.3.7	Late Entry.....	46
10.3.3.7.1	General	46
10.3.3.7.2	Group call late entry on an interworking group defined in the MCPTT system.....	46
10.3.3.7.3	Group call late entry on an interworking group defined in the LMR system	47
10.3.3.8	Interworking group call release.....	49
10.3.3.8.1	General	49
10.3.3.8.2	Group call release on an interworking group defined in the MCPTT system.....	49
10.3.3.8.3	Group call release on an interworking group defined in the LMR system	50
10.3.4	Group broadcast.....	51
10.3.4.1	General	51

10.3.4.2	Group-broadcast group call procedure with an interworking group where the group-broadcast group is defined in the MCPTT system.....	51
10.3.4.3	Group-broadcast group call procedure with an interworking group where the group-broadcast group is defined in the LMR system	54
10.3.4.4	Group-broadcast group call release with an interworking group procedure where the group-broadcast group is defined in the MCPTT system	56
10.3.4.5	Group-broadcast group call release with an interworking group procedure where the group-broadcast group is defined in the LMR system	58
10.3.4.6	Broadcast group regroup call using pre-configured group	59
10.3.4.6.1	General	59
10.3.4.6.2	Broadcast group regroup call using pre-configured group the MCPTT system	59
10.3.4.6.3	Broadcast group regroup call using pre-configured group in the IWF	60
10.3.5	Chat group call.....	61
10.3.5.1	General	61
10.3.5.2	MCPTT user initiated chat group call in an interworking group defined in LMR system	61
10.3.5.3	LMR user initiated chat group call in an interworking group defined in MCPTT system	62
10.3.5.4	Release chat group call on an interworking group defined in the LMR system.....	63
10.3.5.5	Release chat group call on an interworking group defined in the MCPTT system	64
10.3.5.6	void	65
10.3.5.7	void	65
10.3.5.8	Newly joined MCPTT group member of a group defined in the LMR system.....	65
10.3.5.9	Newly joined LMR group member of a group defined in the MCPTT system.....	66
10.3.5.10	MCPTT client returning to coverage on a group homed in the LMR system	67
10.3.6	Exiting group call due to de-affiliation	68
10.3.6.1	General	68
10.3.6.2	Exiting group call defined in the LMR system due to de-affiliation	68
10.3.6.3	Exiting group call defined in the MCPTT system due to de-affiliation	69
10.3.7	Group regroup with pre-configured group.....	70
10.3.7.1	General	70
10.3.7.2	Regroup formation using pre-configured group	71
10.3.7.2.1	Regroup formation using pre-configured group initiated in the MCPTT system	71
10.3.7.2.2	Regroup formation using pre-configured group initiated in the IWF	73
10.3.7.3	Regroup cancellation using pre-configured group regroup	74
10.3.7.3.1	Regroup cancellation using pre-configured group initiated in the MCPTT system	74
10.3.7.3.2	Regroup cancellation using pre-configured group initiated in the IWF	75
10.3.7.4	Regroup rejection using pre-configured group	76
10.3.7.4.1	Regroup rejection using pre-configured group for regroup initiated in the MCPTT system.....	76
10.3.7.4.2	Regroup rejection using pre-configured group for regroup initiated in the IWF.....	77
10.3.7.5	Pre-configured regroup update procedures	78
10.3.7.5.1	MCPTT client PTTs on MCPTT group during an in-progress pre-configured group regroup.....	78
10.3.7.6	Call request on pre-configured regroup group after group regroup has been cancelled.....	80
10.3.7.6.1	MCPTT client PTTs on pre-configured regroup group after group regroup has been cancelled	80
10.3.7.7	Adding newly affiliated user to a pre-configured group regroup	81
10.3.7.7.1	Adding newly affiliated MCPTT user to a pre-configured group regroup	81
10.3.7.7.2	Adding newly affiliated user homed in the IWF to a pre-configured group regroup	82
10.3.8	User regroup with pre-configured group	82
10.3.8.1	General	82
10.3.8.2	Pre-configured user regroup formation	83
10.3.8.2.1	Pre-configured user regroup formation by the MCPTT system	83
10.3.8.2.2	Pre-configured user group regroup formation by the IWF	85
10.3.8.3	Pre-configured user regroup cancellation.....	86
10.3.8.3.1	Pre-configured user regroup cancellation by the MCPTT system	86
10.3.8.3.2	Pre-configured user regroup cancellation by the IWF	87
10.4	Private call.....	87
10.4.1	Information flows for private calls	87
10.4.1.1	General	87
10.4.1.2	IWF private call request	88
10.4.1.3	IWF private call response.....	88
10.4.1.4	IWF ringing	89
10.4.1.5	IWF call end request	89
10.4.1.6	IWF call end response.....	89
10.4.2	Private call setup in automatic commencement mode	89

10.4.2.1	MCPTT user initiating an MCPTT private call.....	89
10.4.2.2	LMR user initiating a private call with MCPTT user.....	91
10.4.3	Private call setup in manual commencement mode	92
10.4.3.1	MCPTT user is initiating an MCPTT private call	92
10.4.3.2	LMR user initiating a private call with MCPTT user.....	94
10.4.4	Private call release	96
10.4.4.1	MCPTT client initiated	96
10.4.4.2	MCPTT server initiated.....	97
10.4.4.3	LMR user initiated	98
10.4.5	Encryption of private calls	99
10.5	Floor control.....	99
10.5.1	General.....	99
10.5.2	Information flows for floor control.....	99
10.5.2.1	General.....	99
10.5.2.2	IWF floor request.....	99
10.5.2.3	IWF floor granted.....	100
10.5.2.4	IWF floor rejected.....	100
10.5.2.5	IWF floor request cancel	100
10.5.2.6	IWF floor request cancel response	100
10.5.2.7	IWF floor request cancel notify	101
10.5.2.8	IWF floor idle.....	101
10.5.2.9	IWF floor release	101
10.5.2.10	IWF floor taken	102
10.5.2.11	IWF floor revoked.....	102
10.5.2.12	IWF floor acknowledgement	102
10.5.2.13	IWF queue position request.....	102
10.5.2.14	IWF queue position info.....	103
10.5.2.15	IWF unicast media stop request	103
10.5.2.16	IWF unicast media resume request	103
10.5.2.17	IWF floor talker ID update.....	104
10.5.3	Interworking floor control	104
10.5.4	Floor override without using floor revoked on an interworking group.....	104
10.5.5	Floor control on an interworking group homed in the LMR system.....	106
10.5.6	Floor control on an interworking group homed in the MCPTT system.....	107
10.5.7	Floor control without local filtering on an interworking group defined in the LMR system.....	108
10.5.8	Floor control without local filtering on an interworking group defined in the MCPTT system	110
10.5.9	Floor control in private call controlled by the LMR system.....	111
10.5.10	Floor control in private call controlled by the MCPTT system	112
10.6	Emergency and imminent peril	113
10.6.1	Information flows for emergency and imminent peril	113
10.6.1.1	IWF emergency group call request	113
10.6.1.2	IWF emergency group call response	113
10.6.1.3	IWF imminent peril group call request	114
10.6.1.4	IWF imminent peril group call response.....	114
10.6.1.5	IWF in-progress imminent peril group state cancel request.....	114
10.6.1.6	IWF in-progress imminent peril group state cancel response	115
10.6.1.7	IWF emergency alert request	115
10.6.1.8	IWF emergency alert response	115
10.6.1.9	IWF emergency alert cancel request	115
10.6.1.10	IWF emergency alert cancel response.....	116
10.6.1.11	IWF in-progress emergency group state cancel request.....	116
10.6.1.12	IWF in-progress emergency group state cancel response	116
10.6.2	Emergency calls.....	117
10.6.2.1	General.....	117
10.6.2.2	Emergency group call	117
10.6.2.2.1	Emergency group call setup initiated by a user in the LMR system on an interworking group defined in the MCPTT system.....	117
10.6.2.2.2	Emergency group call setup initiated by a user in the MCPTT system on an interworking group defined in MCPTT system	119
10.6.2.2.3	Emergency group call setup initiated by a user in the LMR system on an interworking group defined in the LMR system	121

10.6.2.2.4	Emergency group call setup initiated by a user in the MCPTT system to an interworking group defined in the LMR system	122
10.6.2.3	In-progress emergency group state cancel of an interworking group.....	124
10.6.2.3.1	LMR user initiated in-progress emergency group state cancel of an interworking group defined in the MCPTT system.....	124
10.6.2.3.2	MCPTT user initiated in-progress emergency group state cancel of an interworking group defined in the MCPTT system.....	125
10.6.2.3.3	LMR user initiated in-progress emergency group state cancel of an interworking group defined in an LMR system.....	126
10.6.2.3.4	MCPTT user initiated in-progress emergency group state cancel of an interworking group defined in an LMR system.....	127
10.6.2.4	Losing audio.....	129
10.6.2.5	Default emergency group	129
10.6.2.6	Emergency private call.....	129
10.6.2.7	LMR systems that do not track group emergencies	129
10.6.3	Imminent peril calls	129
10.6.3.1	General	129
10.6.3.2	Imminent peril group call initiated by an MCPTT user on an interworking group.....	129
10.6.3.3	Group call initiated by a user in the LMR system on an interworking group in imminent peril state	131
10.6.3.4	In-progress imminent peril state cancel on an interworking group	133
10.6.4	Emergency alerts	135
10.6.4.1	Emergency alert initiated by LMR user	135
10.6.4.2	Emergency alert initiated by MC service user	136
10.6.5	Emergency alert cancellation.....	138
10.6.5.1	Emergency alert cancellation of an LMR user	138
10.6.5.2	Emergency alert cancellation of an MC service user	139
10.7	Codec.....	141
10.7.1	Information flows for codec.....	141
10.7.1.1	IWF codec reconciliation request.....	141
10.7.1.2	IWF codec reconciliation response	141
10.7.2	IWF transcoding	141
10.7.3	Codec negotiation by the LMR system.....	141
10.7.3.1	Description	141
10.8	MCDATA short data service.....	142
10.8.1	General.....	142
10.8.2	Information flows for the short data service.....	143
10.8.2.1	General	143
10.8.2.2	IWF MCDATA standalone data request.....	143
10.8.2.3	IWF MCDATA data disposition notification	143
10.8.2.4	IWF MCDATA group standalone data request (IWF – MCDATA server)	143
10.8.2.5	IWF MCDATA group standalone data request (MCDATA server - IWF).....	144
10.8.2.6	IWF MCDATA data disposition notification(s) (MCDATA server to IWF).....	144
10.8.2.7	IWF MCDATA group standalone data request (IWF – MCDATA server)	145
10.8.2.8	IWF MCDATA group standalone data request (MCDATA server – IWF)	145
10.8.2.9	IWF MCDATA group standalone data response.....	146
10.8.3	Behaviour at the MCDATA Client.....	146
10.8.4	Behaviour at the IWF.....	146
10.8.5	Behaviour at the MCDATA server.....	146
10.8.6	MCDATA user one-to-one SDS request to an LMR user.....	146
10.8.6.1	Signalling control plane	146
10.8.6.2	Media plane.....	147
10.8.7	LMR user one-to-one SDS request to an MCDATA user.....	147
10.8.7.1	Signalling control plane	147
10.8.7.2	Media plane.....	147
10.8.8	MCDATA user group SDS request to an MCDATA group including LMR users	147
10.8.8.1	Signalling control plane	147
10.8.8.2	Media plane.....	147
10.8.9	LMR user group SDS request to an MCDATA group	147
10.8.9.1	Signalling control plane	147
10.8.9.2	Media plane.....	148
10.9	IWF as a security gateway.....	148

10.9.1	Support for transcoding with encrypted speech.....	148
10.10	Simultaneous interworked calls (on-network).....	148
10.10.1	General.....	148
10.11	Location.....	148
10.11.1	Location of current talker	148
10.11.2	Location of current talker (MCPTT server to IWF).....	148
10.11.3	Location of current talker (IWF to MCPTT server).....	149
10.12	LMR security transport	150
10.12.1	Information flows for LMR security transport.....	150
10.12.1.1	Non-3GPP security message request.....	150
10.12.1.2	Non-3GPP security message response	151
10.12.2	LMR key management messages.....	151
10.12.2.1	General	151
10.12.2.2	MC service client initiated	151
10.12.2.3	IWF initiated	151
10.13	Analogue FM/TIA-603-D and other legacy LMR interworking	152
10.13.1	General.....	152
10.13.2	Interworking Concepts.....	152
10.13.3	Procedures.....	153
10.13.3.1	Group call with talker ID update initiated by an LMR user on an interworking group defined in the MCPTT system	154
10.13.3.2	Group call with talker ID update initiated by an LMR user on an interworking group defined in the LMR system	156
10.14	IWF functional alias management.....	158
10.15	Enhanced status	158
10.15.1	General.....	158
10.15.2	Preset values for enhanced status.....	158
10.15.3	Enhanced status for on-network.....	158
10.15.3.1	Procedure (MCData to IWF).....	158
10.15.3.2	Procedure (IWF to MCData).....	158
Annex A (informative):	Change history	159
History	<u>ETSI TS 123 283 V16.7.0 (2022-03)</u>	162

<https://standards.iteh.ai/catalog/standards/sist/ee8a4226-bf1c-40fc-898e-68a820a063fc/etsi-ts-123-283-v16-7-0-2022-03>

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

**iTeh STANDARD
PREVIEW
(standards.iteh.ai)**

ETSI TS 123 283 V16.7.0 (2022-03)
<https://standards.iteh.ai/catalog/standards/sist/ee8a4226-bf1c-40fc-898e-68a820a063fc/etsi-ts-123-283-v16-7-0-2022-03>

1 Scope

The objective of this technical specification is to specify interworking between MC systems and LMR systems that satisfy the MCPTT requirements in 3GPP TS 22.179 [3], MCCoRe requirements in 3GPP TS 22.280 [2] and the MCDData requirements (SDS only) in 3GPP TS 22.282 [4].

The present document refers to an InterWorking Function (IWF). The structure and functionality of the IWF is out of scope of the present document. The definition of reference points between the IWF and MC systems and the interactions between the IWF and MC systems are in scope of the present document.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 22.280: "Mission Critical Services Common Requirements (MCCoRe); Stage 1".
- [3] 3GPP TS 22.179: "Mission Critical Push to Talk (MCPTT); Stage 1".
- [4] 3GPP TS 22.282: "Mission Critical Data services".
- [5] 3GPP TS 23.280: "Common functional architecture to support mission critical services; Stage 2".
- [6] 3GPP TS 23.282: "Functional architecture and information flows to support Mission Critical Data (MCDData); Stage 2".
- [7] 3GPP TS 23.379: "Functional architecture and information flows to support Mission Critical Push To Talk (MCPTT); Stage 2".
- [8] 3GPP TS 33.180: "Security of the mission critical service"
- [9] TIA-603-D: "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

End-to-End Encryption: encryption that is applied by an originating terminal or client and is decrypted only by chosen terminating terminals or clients.

User homed in the IWF: is an MC service ID that represents an LMR user in the MC system.

Interworking: a means of communication between mission critical systems and LMR systems whereby MC users obtaining service from a mission critical system can communicate with LMR users who are obtaining service from one or more LMR systems.

Interworking function: adapts LMR Systems to mission critical systems via the IWF interface and supports interworking between LMR systems and mission critical systems.

Interworking group: a group, which is composed of group members from the MC system and the LMR system and defined in the MC system or the LMR system.

LMR system: the collection of applications, services, and enabling capabilities providing a land mobile radio service offering group and private communications.

LMR user: a user of a device which allows participation in an LMR system.

NOTE: The term LMR user is defined for discussion purposes only and is out of scope of the present document.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

E2EE	End-to-End Encryption
IWF	InterWorking Function
KEK	Key Encryption Key (TETRA)
KMS	Key Management Service
MC	Mission Critical
MCPTT	Mission Critical Push To Talk
LMR	Land Mobile Radio
OTAK	Over-The-Air-Key Management (TETRA)
OTAR	Over-The-Air Rekeying (P25)
P25	Project 25
SDS	Short Data Service
TETRA	Terrestrial Trunked Radio
UE	User Equipment
UKEK	Unique Key Encryption Key (P25)
URI	Uniform Resource Identifier

4 Introduction

Mission critical users currently employ a wide range of LMR mission critical Push To Talk services, and associated data capabilities where available.

The present document describes the architecture to support the interworking between the MC system and the LMR system to satisfy interworking requirements specified in 3GPP TS 22.179 [3] and 3GPP TS 22.282 [4]. Other LMR technologies may interwork as long as they conform to the present document.

The IWF, along with its LMR system, will appear as a peer interconnected MC system. This is meant as an approach for defining interactions on the IWF interface but is not intended to specify the functionality of the IWF nor meant to mandate a deployment model.

5 Assumptions and architectural requirements

5.1 Key management

Interworking requirements for key management for encrypted interworking include:

- a) a mechanism to securely (i.e. authenticity, integrity, confidentiality) share an LMR E2EE traffic key for a private call sessions between a party in an MCPTT system and a party in the LMR system;
- b) a mechanism to securely convey to group members, the LMR E2EE key or set of LMR E2EE keys associated with an MC service group or set of MC service groups, to be used for encryption of interworking group calls spanning the multiple systems;
- c) a mechanism to securely share with temporary group members in MC systems, the LMR E2EE key(s) associated with a temporary MC service group to be used in interworking group calls spanning the multiple systems;
- d) key management solutions shall not preclude the ability of an IWF to allow one or more individual Mission Critical Organizations from having sole control over and sole access to LMR E2EE traffic keys used for the entity's media traffic and users' key encryption keys (UKEKs or KEKs);
- e) key management solutions shall support the ability of the IWF to decrypt/reencrypt the media traffic for zero or more groups; and,
- f) for deployments where Mission Critical Organizations wish to use LMR E2EE mechanisms when interworking with LMR users:
 - i) a mechanism to securely provision an MC service client with the user's UKEK or KEK; and,
 - ii) a mechanism to convey LMR OTAR or OTAK message contents.

5.2 Packet format

Each LMR technology defines its own packet format for voice media transmission. For interworking sessions, there might be cases where LMR formatted media is required to be transferred between the IWF and LMR aware MCPTT clients. An example of such a case is where E2EE is used and thus the IWF is not able to decrypt the media. In such cases, media that is sent over the IWF-1 interface needs to be routed within MCPTT systems to/from LMR aware MCPTT clients using methods described in 3GPP TS 23.379 [7].

Requirements for media transmission across the IWF-1 interface include:

- a) media transmission to carry the LMR formatted media between the IWF and LMR aware MCPTT clients; and
- b) the MCPTT system, along with the IWF, may choose to encrypt the LMR formatted media using 3GPP mechanisms.

NOTE: The contents of the LMR formatted media is out of scope of the present document.

6 Involved business relationships


No business relationships have been identified.

7 Functional model

7.1 General

7.2 Functional model description

Figure 7.2-1 shows the functional model for the application plane for interworking between MC systems and LMR systems. Functional entities and interfaces depicted on the right-hand side of the IWF-x interfaces are defined in 3GPP TS 23.280 [5], 3GPP TS 23.379 [7], and 3GPP TS 23.282 [6].

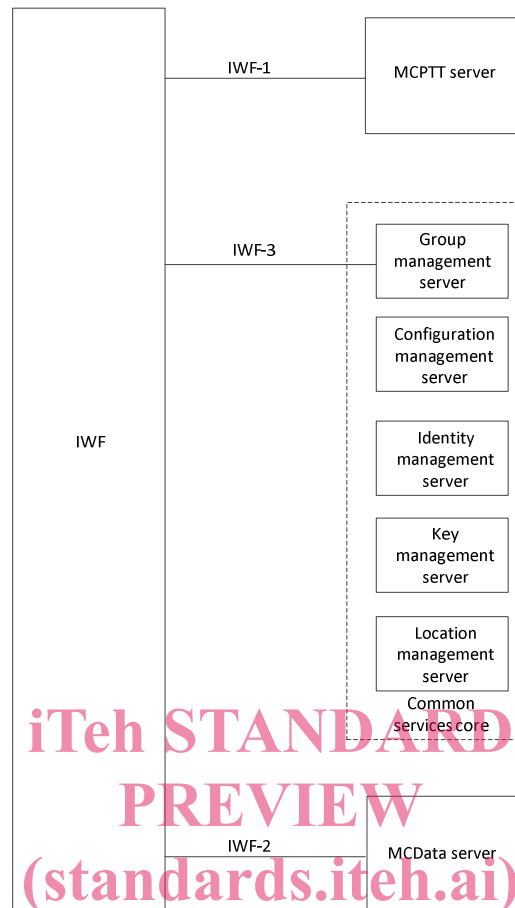

ETSI TS 123 283 V16.7.0 (2022-03)
<https://standards.iteh.ai/catalog/standards/sist/ee8a4226-bf1c-40fc-898e-68a820a063fc/etsi-ts-123-283-v16-7-0-2022-03>

Figure 7.2-1: Functional model for application plane for interworking

7.3 Functional entities description

7.3.1 IWF

The IWF supports most of the functionality of peer MCPTT and MCData systems, with some differences, as specified in the present document. The IWF supports any necessary protocol translation and identity mapping between the MC systems and the IWF. The internal function of the IWF is out of scope of the present document.

7.4 Reference points

7.4.1 Reference point IWF-1 (between the IWF and the MCPTT server)

The IWF-1 reference point, which exists between the IWF and the MCPTT server, provides peer to peer interconnection between an LMR system and the MCPTT system. IWF-1 supports a subset of MCPTT-3 as defined in 3GPP TS 23.379 [7], with some differences, as specified in the present document. The IWF-1 interface is supported by the same signalling plane protocol(s) as defined for MCPTT-3 except as specified in the present document.

7.4.2 Reference point IWF-2 (between the IWF and the MCData server)

The IWF-2 reference point, which exists between the IWF and the MCData server, provides SDS interconnection between an LMR system and the MCData system. IWF-2 supports a subset of the functionality of MCData-SDS-1 and MCData-SDS-2, as defined in 3GPP TS 23.282 [6] with some differences, as specified in the present document. The

IWF-2 interface is supported by the same signalling plane protocol(s) as defined for MCDData-3 except as specified in the present document.

7.4.3 Reference point IWF-3 (between the IWF and the group management server)

The IWF-3 reference point, which exists between the IWF and the group management server, provides group management interconnection between an LMR system and the MC service system. IWF-3 is based upon CSC-16, as defined in 3GPP TS 23.280 [5] with some differences, as specified in the present document.

8 Identities

8.1 Identity mapping

The IWF provides centralised support for interworking between an MCPTT or MCDData system and an LMR system. In MCPTT systems, the identity of an LMR user is provided as an MCPTT ID, and the identity of an LMR group is provided as an MCPTT group ID, which can be used by the IWF to derive the corresponding identities used in an LMR system. Similarly, in MCDData systems, the identity of an LMR user is provided as an MCDData ID, and the identity of an LMR group is provided as an MCDData group ID, which can be used by the IWF to derive the corresponding identities used in an LMR system.

Identities provided on IWF-x reference points are described in clause 8 of 3GPP TS 23.280 [5].

The IWF can perform the identity mapping between an MCPTT system or MCDData system and an LMR system during exchange of signalling and media messages.

The assignment of a functional alias that belongs to the MC system to a user homed in the IWF enables the mapping to corresponding role-based addressing schemes applicable in the LMR system.

ETSI TS 123 283 V16.7.0 (2022-03)

[https://standards.iteh.ai/catalog/standards/sist/ee8a4226-](https://standards.iteh.ai/catalog/standards/sist/ee8a4226-bf1c-40fc-898e-68a820a063fc/etsi-ts-123-283-v16-7-0-2022-03)

[bf1c-40fc-898e-68a820a063fc/etsi-ts-123-283-v16-7-0-](https://standards.iteh.ai/catalog/standards/sist/ee8a4226-bf1c-40fc-898e-68a820a063fc/etsi-ts-123-283-v16-7-0-2022-03)

[2022-03](https://standards.iteh.ai/catalog/standards/sist/ee8a4226-bf1c-40fc-898e-68a820a063fc/etsi-ts-123-283-v16-7-0-2022-03)

9 Application of functional model to deployments

No applications of functional model to deployments have been identified.

10 Procedures and information flows

10.1 Affiliation

10.1.1 Information flows for affiliation

10.1.1.1 General

The following subclauses define information flows for affiliation on the IWF-1 interface. Affiliation related information flows on reference points other than IWF-1 are defined in 3GPP TS 23.280 [5].

10.1.1.2 IWF group affiliation request

Table 10.1.1.2-1 describes the information flow IWF group affiliation request between the IWF and an MC service server and between an MC service server and the IWF.