



SLOVENSKI STANDARD
kSIST-TS FprCEN/TS 19102:2023
01-julij-2023

Projektiranje napetih membranskih konstrukcij

Design of tensioned membrane structures

Bemessung von vorgespannten Membrantragwerken

Conception et calcul des structures en membrane tendue

Ta slovenski standard je istoveten z: FprCEN/TS 19102

<https://standards.iteh.ai/catalog/standards/sist/a8316e1a-5924-4f1a-a295-d0ea938d9346/ksist-ts-fprcen-ts-19102-2023>

ICS:

91.080.99 Druge konstrukcije Other structures

kSIST-TS FprCEN/TS 19102:2023 **en,fr,de**

TECHNICAL SPECIFICATION
SPÉCIFICATION TECHNIQUE
TECHNISCHE SPEZIFIKATION

FINAL DRAFT
FprCEN/TS 19102

April 2023

ICS 91.080.99

English Version

Design of tensioned membrane structures

Conception et calcul des structures en membrane tendue

Bemessung von vorgespannten Membrantragwerken

This draft Technical Specification is submitted to CEN members for Vote. It has been drawn up by the Technical Committee CEN/TC 250.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and United Kingdom.

Recipients of this draft are invited to submit, with their comments, notification of any relevant patent rights of which they are aware and to provide supporting documentation.

Warning : This document is not a Technical Specification. It is distributed for review and comments. It is subject to change without notice and shall not be referred to as a Technical Specification.

[kSIST-TS FprCEN/TS 19102:2023](https://standards.iteh.ai/catalog/standards/sist/a8316e1a-5924-4f1a-a295-d0ea938d9346/ksist-ts-fprcen-ts-19102-2023)

<https://standards.iteh.ai/catalog/standards/sist/a8316e1a-5924-4f1a-a295-d0ea938d9346/ksist-ts-fprcen-ts-19102-2023>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Contents	Page
European foreword	6
0 Introduction.....	7
1 Scope.....	8
1.1 Scope of CEN/TS 19102.....	8
1.2 Assumptions	8
2 Normative references.....	9
3 Terms, definitions and symbols	9
3.1 Terms and definitions.....	9
3.2 Symbols and abbreviations	18
4 Basis of design.....	20
4.1 General rules	20
4.2 Principles of limit state design.....	22
4.3 Basic variables	22
4.4 Verification by the partial factor method	24
4.5 Design assisted by testing.....	26
5 Materials	26
5.1 General.....	26
5.2 Fabrics.....	26
5.3 Foils.....	27
5.4 Connection devices.....	28
5.5 Structural Elements	28
6 Durability.....	29
6.1 General.....	29
6.2 Fabrics.....	29
6.3 Foils.....	30
7 Structural Analysis	30
7.1 General.....	30
7.2 Pneumatic structures.....	31
7.3 Patterning.....	32
8 Ultimate Limit States	33
8.1 General.....	33
8.2 Resistance of fabrics and their connections.....	33
8.3 Resistance of foils and their connections.....	35
8.4 Design situation ponding	38
9 Serviceability Limit States	39
9.1 General.....	39
9.2 Deflections.....	39
9.3 Wrinkling.....	39
9.4 Maintenance of the prestress and post tensioning.....	40
9.5 Tear control	40
9.6 Special provisions for foils	40
10 Connections.....	44

FprCEN/TS 19102:2023 (E)

10.1	Introduction	44
10.2	Irreversible membrane connections.....	46
10.3	Reversible membrane connections	48
10.4	Membrane edges.....	50
10.5	Corners	52
10.6	Field supports	54
10.7	Further connection devices	54
Annex A (informative) Classification of structural membranes.....		55
A.1	Use of this Annex.....	55
A.2	Scope and field of application	55
A.3	General framework.....	55
A.4	Strength classification for PES-PVC.....	55
A.5	Tensile Strength classification for glass-PTFE	56
A.6	Typical Strength values for ETFE foil	57
Annex B (normative) Procedures for determination of modification factors		58
B.1	Use of this Annex.....	58
B.2	Scope and field of application	58
B.3	General determination of modification factors	58
B.4	Modification factor considering modified temperature	58
B.5	Modification factor considering permanent load	60
B.6	Modification factor considering long-term load	62
B.7	Modification factor considering ageing.....	62
B.8	Modification factor considering biaxial stress states.....	62
B.9	Modification factor considering panel size	62
Annex C (informative) Modification factors.....		63
C.1	Use of this Annex.....	63
C.2	Scope and field of application	63
C.3	Typical Modification factors for PES-PVC membrane	63
C.4	Typical Modification factors for glass-PTFE membrane	64
C.5	Typical Modification factors for ETFE foil membrane for ULS verification.....	64
C.6	Typical Modification factors for ETFE foil membrane for SLS verification	65
Annex D (informative) Test procedures considering crease folds sensitive fabrics.....		66
D.1	Use of this Annex.....	66
D.2	Scope and field of application	66
D.3	Running Double Crease Fold	67
D.4	Over-Loop Rolling.....	68
Annex E (informative) Test procedures to determine foil properties		70
E.1	Use of this Annex.....	70

FprCEN/TS 19102:2023 (E)

E.2	Scope and field of application	70
E.3	Biaxial Creep Tests for foils.....	70
E.4	Biaxial Hysteresis Load Tests for foils	72
E.5	Evaluation of the biaxial tests according to E.4	74
Annex F (informative) Special provisions with regards to fire		77
F.1	Use of this Annex.....	77
F.2	Scope and field of application	77
Annex G (informative) Fire performance of membrane structures exposed to fire		79
G.1	Safety assessment of membrane structures exposed to fire.....	79
Annex H (informative) Technical management measures for the implementation of membrane structures.....		80
H.1	Use of this Annex.....	80
H.2	Scope and field of application	80
H.3	Choice of technical management measures	80
H.4	Design quality.....	80
H.5	Design checking.....	80
H.6	Execution quality	80
H.7	Inspection during execution	81
H.8	Technical management measures	81
H.9	Continuous quality control of base materials production	82
H.10	Initial type testing of membrane panels.....	83
H.11	Continuous quality control of membrane panel production	84
H.12	Technical documents and workshop planning.....	87
H.13	Acquisition of the membrane material.....	89
H.14	Inspection before packing	90
H.15	Folding, packaging and transportation.....	90
H.16	Erection	91
H.17	Installation	92
H.18	Handling of crease fold impacts	93
Annex I (normative) Structural foils - Determination of tensile properties under uniaxial stress states.....		94
I.1	Use of this Annex.....	94
I.2	Scope and field of application	94
I.3	Terms and definitions.....	94
I.4	Principle	94
I.5	Apparatus	94
I.6	Test specimens	95

FprCEN/TS 19102:2023 (E)

I.7	Number of test specimens	95
I.8	Test procedure	95
I.9	Evaluation and representation of test results.....	98
I.10	Precision	98
I.11	Evaluation of tests	98
I.12	Test report	98
Annex J (normative) Structural coated fabrics – Determination of tensile properties under uniaxial stress states		99
J.1	Use of this Annex.....	99
J.2	Scope and field of application	99
J.3	Test specimen preparation	99
J.4	Test procedure	100
J.5	Tests at temperatures different from room temperature	100
J.6	Evaluation of tests	101
Bibliography		102

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[kSIST-TS FprCEN/TS 19102:2023](https://standards.iteh.ai/catalog/standards/sist/a8316e1a-5924-4f1a-a295-d0ea938d9346/ksist-ts-fprcen-ts-19102-2023)

<https://standards.iteh.ai/catalog/standards/sist/a8316e1a-5924-4f1a-a295-d0ea938d9346/ksist-ts-fprcen-ts-19102-2023>

FprCEN/TS 19102:2023 (E)**European foreword**

This document (FprCEN/TS 19102:2023) has been prepared by Technical Committee CEN/TC 250 “Structural Eurocodes”, the secretariat of which is held by BSI. CEN/TC 250 is responsible for all Structural Eurocodes and has been assigned responsibility for structural and geotechnical design matters by CEN.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

This document is currently submitted to the Vote on TS.

This Technical Specification has been prepared under Mandate M/515 issued to CEN by the European Commission and the European Free Trade Association.

This Technical Specification has been drafted to be used in conjunction with relevant execution, material, product and test standards, and to identify requirements for execution, materials, products and testing that are relied upon by the Eurocodes.

Any feedback and questions on this document should be directed to the users’ national standards body. A complete listing of these bodies can be found on the CEN website.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

[ksIST-TS FprCEN/TS 19102:2023](https://standards.iteh.ai/catalog/standards/sist/a8316e1a-5924-4f1a-a295-d0ea938d9346/ksist-ts-fprcen-ts-19102-2023)

<https://standards.iteh.ai/catalog/standards/sist/a8316e1a-5924-4f1a-a295-d0ea938d9346/ksist-ts-fprcen-ts-19102-2023>

FprCEN/TS 19102:2023 (E)**0 Introduction****0.1 Introduction to CEN/TS 19102**

This document for the design of tensioned membrane structures, which was prepared in line with the Eurocodes, is intended for use by designers, clients, manufacturers, constructors, relevant authorities (in exercising their duties in accordance with national or international regulations), educators, software developers, and committees drafting standards for related product, testing and execution standards.

NOTE Some aspects of design are most appropriately specified by relevant authorities or, where not specified, can be agreed on a project-specific basis between relevant parties such as designers and clients. The Eurocodes identify such aspects making explicit reference to relevant authorities and relevant parties.

0.2 Verbal forms used in the Eurocodes

The verb “shall” expresses a requirement strictly to be followed and from which no deviation is permitted in order to comply with the Eurocodes.

The verb “should” expresses a highly recommended choice or course of action. Subject to national regulation and/or any relevant contractual provisions, alternative approaches could be used/adopted where technically justified.

The verb “may” expresses a course of action permissible within the limits of the Eurocodes.

The verb “can” expresses possibility and capability; it is used for statements of fact and clarification of concepts.

0.3 National Annex for CEN/TS 19102

This document gives values within notes indicating where national choices can be made. Therefore, a national document implementing CEN/TS 19102 can have a National Annex containing all Nationally Determined Parameters to be used for the assessment of buildings and civil engineering works in the relevant country.

When not given in the National Annex, the national choice shall be the default choice specified in the relevant Technical Specification.

The national choice can be specified by a relevant authority.

When no choice is given in the Technical Specification, in the National Annex, or by a relevant authority, the national choice can be agreed for a specific project by appropriate parties.

National choice is allowed in CEN/TS 19102 through the following clauses:

4.3.1.2(3)	4.4.3.2(1)	8.2.1(3)	8.3.1(3)
9.2.1(1)	9.6.1(3)	C.3	C.4
C.5	C.6		

National choice is allowed in CEN/TS 19102 on the application of the following informative annexes:

Annex A	Annex H
---------	---------

The National Annex can contain, directly or by reference, non-contradictory complementary information for ease of implementation, provided it does not alter any provisions of the Eurocodes.

FprCEN/TS 19102:2023 (E)**1 Scope****1.1 Scope of CEN/TS 19102**

(1) This document applies to the design of buildings and structural works, made of structural membrane material. It provides guidance for the design of tensioned membrane structures, either mechanically or pneumatically tensioned at a defined prestress level.

NOTE 1 Membrane materials comprise structural fabrics, coated structural fabrics and foils.

NOTE 2 For elements of tensile surface structures not governed by this Technical Specification (for example made of steel, aluminium, wood or other structural materials), see relevant Eurocode parts.

(2) This document is concerned with the requirements for resistance, serviceability and durability of tensioned membrane structures, as given in EN 1990.

NOTE 1 The safety criteria follow EN 1990 and will consider specific limit states for tensioned membrane structures.

NOTE 2 Specific requirements concerning seismic design are not considered.

(3) Design and verification in this document is based on limit state design in conjunction with the partial factor method.

NOTE Special attention goes to the action of prestress, snow, wind and rain action on membrane structures and the combined effect of wind and rain or snow.

(4) This document covers analysis methodologies appropriate for tensioned membrane structures, from analytical to full numerical simulation methods.

(5) This document considers connections between membrane materials and between membrane materials and others.

(6) This document is applicable for hybrid membrane structures integrating different kinds of load bearing behaviour (tension, compression, bending, inflation...), in a way that the structural membrane shares loadbearing capacity with other structural elements made of different materials.

NOTE The term 'hybrid structure' refers to this combined structural behaviour or use of materials.

1.2 Assumptions

(1) The assumptions of EN 1990 apply to this document.

(2) This document is intended to be used in conjunction with EN 1990, the EN 1991 series, the EN 1993 series, the EN 1999 series, ENs, EADs and ETAs for construction products relevant to tensioned membrane structures.

FprCEN/TS 19102:2023 (E)**2 Normative references**

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE See the Bibliography for a list of other documents cited that are not normative references, including those referenced as recommendations (i.e. in 'should' clauses), permissions ('may' clauses), possibilities ('can' clauses), and in notes.

EN 1990:2023, *Eurocode — Basis of structural and geotechnical design*

EN 1991 (all parts), *Eurocode 1 — Actions on structures*

EN 1993 (all parts), *Eurocode 3 — Design of steel structures*

EN 1999 (all parts), *Eurocode 9 — Design of aluminium structures*

EN ISO 527-1:2019, *Plastics — Determination of tensile properties — Part 1: General principles (ISO 527-1:2019)*

EN ISO 527-3:2018, *Plastics — Determination of tensile properties — Part 3: Test conditions for films and sheets (ISO 527-3:2018)*

EN ISO 1421:2016, *Rubber- or plastics-coated fabrics — Determination of tensile strength and elongation at break (ISO 1421:2016)*

EN ISO 13934-1, *Textiles — Tensile properties of fabrics — Part 1: Determination of maximum force and elongation at maximum force using the strip method (ISO 13934-1)*

3 Terms, definitions and symbols

For the purposes of this document, the terms and definitions given in EN 1990 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1 Terms and definitions**3.1.1****anchor**

device used to secure a membrane or cable to a support, usually buried in the ground, so installed as to provide a firm point of attachment for resisting uplift

3.1.2**biaxial**

stress state with stress along two orthogonal axes simultaneously

3.1.3**boundary cable**

cable at the edge or termination of the membrane

FprCEN/TS 19102:2023 (E)**3.1.4****cable**

flexible linear or curvilinear element acting in tension

Note 1 to entry: A cable can be a wire rope, strand or web.

3.1.5**cable fitting**

any accessory used as an attachment to, or support for, a cable

3.1.6**cable pocket**

method of wrapping the membrane around a cable at a boundary condition

3.1.7**clamped connection**

connection made by a series of shaped, overlapping plates that are clamped together by bolting

3.1.8**coated fabric**

fabric with an adherent layer of polymeric material on one or both sides, the coated product remaining flexible

[SOURCE: ISO 472:2013, 2.152]

3.1.9**compensation**

reduction in size of a cutting pattern, so that during installation the panel elongates to achieve an initial nominal prestress

[SOURCE: EN 17117-1:2018, 3.1]

3.1.10**compensation value**

amount by which the dimensions of the pattern geometry is reduced by compensation

Note 1 to entry: The compensation value is expressed as a percentage of length in the direction to be compensated

[SOURCE: EN 17117-1:2018, 3.1]

3.1.11**connection**

location at which two or more elements meet, e.g. two structural membrane panels or a structural membrane and the supporting structure. For design purposes it is the assembly of the basic components required to represent the behaviour during the transfer of the relevant internal forces and moments at the connection

[SOURCE: prEN 1993-1-8, slightly adjusted]

FprCEN/TS 19102:2023 (E)

3.1.12

cutting pattern

two-dimensional geometry developed from a pattern to be cut out of an individual piece of membrane

[SOURCE: EN 17117-1:2018, 3.1]

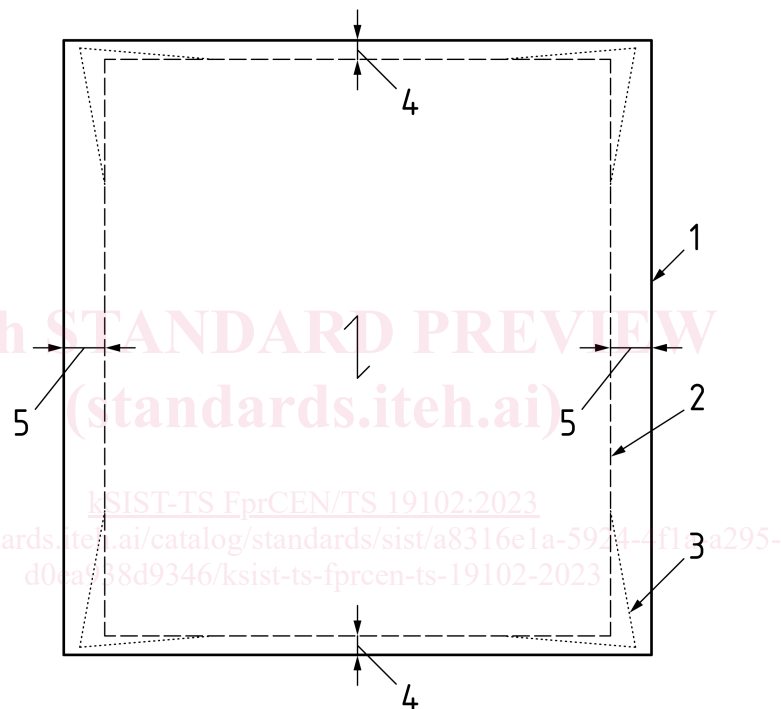
Note 1 to entry: The pattern refers to a seam layout-based subdivision of the three-dimensional surface.

3.1.13

decompensation

partial or complete reduction of compensation

[SOURCE: EN 17117-1:2018, 3.1]

**Key**

- 1 Final geometry when stressed with nominal prestress
- 2 Geometry compensated, unstressed
- 3 Geometry decompensated, unstressed
- 4 Half of the pattern compensation measure in warp
- 5 Half of the pattern compensation measure in fill

Figure 3.1 — Typical application of compensation and decompensation to a piece of membrane

Note 1 to entry: Decompensation may be applied to ease the installation process, typically in the vicinity of boundaries.

Note 2 to entry: Typical application of compensation and decompensation to a piece of membrane is depicted in Figure 3.1.

FprCEN/TS 19102:2023 (E)**3.1.14****European Technical Product Specification**

- European Product Standard (EN),
- or a European Technical Assessment (ETA) based on a European Assessment Document (EAD),
- or a transparent and reproducible assessment that complies with all requirements of the relevant EAD

3.1.15**eyelet**

metal ring used to reinforce a small round hole in the membrane for threading a lace, string or rope through

3.1.16**external structure**

structural elements of the construction, to which the membrane structure is connected, which carry vertical and horizontal loads from the membrane structure down to the foundations of the construction. The external structure is out of the scope of this document

3.1.17**extrusion direction**

extrusion direction (or machine direction), abbreviated as “ED” (or “MD”), is the direction of extrusion of a foil, corresponding with the longitudinal direction of a rolled-up sheet

3.1.18**fabric**

sheet material produced from yarn or roving by a weaving process

3.1.19**fill**

weft

all wires running crosswise of the cloth as woven

[SOURCE: ISO 2395:1990, 3.2.22]

3.1.20**foil**

film

unsupported film with uniform thickness

[SOURCE: CEN ISO/TS 80004-11:2020, 3.1.4]

Note 1 to entry: Strictly the term foil refers to a metallic membrane. However, it is now the most commonly used term for all isotropic structural plastic membranes including ETFE foils.

3.1.21**form found shape**

equilibrium shape of the membrane depending on the geometry of the boundaries and the ratio of prestress in the main structural directions

3.1.22**hem**

edge of a membrane panel folded and stitched or welded or both

FprCEN/TS 19102:2023 (E)**3.1.23****high point**

commonly used expression for a radially patterned conical structure with elevated mid-ring

3.1.24**initial type testing**

initial tests performed to determine the strength of seams and edge connections that can be achieved

3.1.25**installation**

erecting the membrane structure on site

3.1.26**keder**

encased cable edge treatment for membrane surfaces, either used in conjunction with grooved profile extrusions or with plates, for connecting to rigid boundaries, corner plates and boundary cables

3.1.27**manufacture**

converting the membrane material into a panel ready to be installed

3.1.28**material production**

production of the membrane (base) material in the form of a roll

3.1.29**membrane material (base material)**

thin, sheet-like material to create tensile surface structures, comprising structural fabrics, coated structural fabrics and foils

3.1.30**nominal prestress**

input data of prestress prescribed during the form finding and structural analysis, and part of the structural design

[SOURCE: EN 17117-1:2018, 3.1]

3.1.31**numerical model**

numerical representation of a physical model

3.1.32**panel**

final three-dimensional assembly of pieces of membrane, cut according to the cutting pattern, ready to be installed on site

[SOURCE: EN 17117-1:2018, 3.1]

Note 1 to entry: An architectural tensioned envelope may be made of more than one panel.

Note 2 to entry: A panel made of pieces of membrane is depicted in Figure 3.2.