INTERNATIONAL STANDARD

ISO/IEC 23005-1

Third edition 2016-07-15

Information technology — Media context and control —

Part 1: **Architecture**

Technologies de l'information — Contrôle et contexte de supports —

iTeh STPartie DArchitecture REVIEW (standards.iteh.ai)

<u>ISO/IEC 23005-1:2016</u> https://standards.iteh.ai/catalog/standards/sist/9420f663-7594-4994-9ab3-57d2fa0073f0/iso-iec-23005-1-2016



iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/IEC 23005-1:2016 https://standards.iteh.ai/catalog/standards/sist/9420f663-7594-4994-9ab3-57d2fa0073f0/iso-iec-23005-1-2016



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Ch. de Blandonnet 8 • CP 401 CH-1214 Vernier, Geneva, Switzerland Tel. +41 22 749 01 11 Fax +41 22 749 09 47 copyright@iso.org www.iso.org

Contents

Page

1	Scope	1
2	Terms and definitions	1
2.1	Device Command	1
2.2	R → V Adaptation	1
2.3	Sensed Information	
2.4	Sensor	
2.5	Sensor Adaptation Preferences	
2.6	Sensor Capability	
2.7	Sensory Device	
2.8	Sensory Device Capability	
2.9	Sensory Effects	
2.10	Sensory Effect Metadata	
2.11	User's Sensory Preferences	
2.12	User	
2.13	Virtual World	
2.14	V → R Adaptation	
2.15	VW Object Characteristics	
3	MPEG-V System Architecture AND ARD PREVIEW	2
4	Use cases	5
4.1	Information adaptation from virtual world to real world	5
•	System Architecture for information adaptation from virtual world to real world	5
4.2	Information adaptation from real world to virtual world	6
•	System Architecture for information adaptation from real world to virtual world	6
4.3	Information exchange between virtual worlds 005-1-2016	7
•	System Architecture for exchanges between virtual worlds	
_	Instantiations	
5 5.1	Instantiation A: Representation of Sensory Effects (RoSE)	
5.1	System Architecture for Representation of Sensory Effects	
•	Instantiation A.1: Multi-sensorial Effects	
•	Instantiation A.1: Multi-sensorial Effects	
• 5.2	Instantiation B: Natural user interaction with virtual world	
5.2		
•	System Architecture for Natural user interaction with virtual world	12
•	Instantiation B.1: Full motion control and navigation of avatar/object with multi-input sources	13
•	Instantiation B.2: Serious gaming for ambient assisted living	
•	Instantiation B.3: Gesture recognition using multipoint interaction devices	
•	Instantiation B.4: Avatar facial expression retargeting using smart camera	
•	Instantiation B.5: Motion tracking and facial animation with multimodal interaction	
•	Instantiation B.6: Serious gaming and training with multimodal interaction	
•	Instantiation B.7: Virtual museum guide with embodied conversational agents	
5.3	Instantiation C: Traveling and navigating real and virtual worlds	
•	System Architecture for traveling and navigating real and virtual worlds	
•	Instantiation C.1: Virtual travel	
•	Instantiation C.2: Virtual traces of real places	
•	Instantiation C.3: Virtual tour guides	
	Instantiation C.3: Virtual tour guides	
• 5.4	Instantiation C.4: Unimarined aerial vehicle scenario	
J. T	System Architecture for interoperable virtual worlds	
•	Instantiation D 1: Avatar annearance	24 24

ISO/IEC 23005-1:2016(E)

•	Instantiation D.2: Virtual objects	24
5.5	Instantiation E: Social presence, group decision-making and collaboration within virtual	
	worlds	26
•	System architecture	
•	Instantiation E.1: Social presence	
•	Instantiation E.2: Group decision-making in the context of spatial planning	27
•	Instantiation E.3: Consumer collaboration in product design processes along the supply chain	28
5.6	Instantiation F: Interactive haptic sensible media	30
•	System architecture for interactive haptic sensible media	30
•	Instantiation F.1: Internet haptic service - YouTube, online chatting	
•	Instantiation F.2: Next generation classroom – sensation book	
•	Instantiation F.3: Immersive broadcasting – home shopping, fishing channels	32
•	Instantiation F.4: Entertainment – game (Second Life, Star Craft), movie theater	
•	Instantiation F.5: Virtual simulation for training – military task, medical simulations	33
5.7	Instantiation G: Bio-sensed information in virtual world	33
•	System architecture for bio-sensed information in virtual world	33
•	Instantiation G.1: Interactive games sensitive to user's conditions	
•	Instantiation G.2: Virtual hospital and health monitoring	
•	Instantiation G.3: Mental health for lifestyle management	35
•	Instantiation G.4: Food intake for lifestyle management	36
•	Instantiation G.5: Cardiovascular rehabilitation for health management	37
•	Instantiation G.6: Glucose level / diabetes management for health management	38
5.8	Instantiation H: Environmental monitoring with sensors	38
•	System architecture for environmental monitoring	38
•	Instantiation H.1: Environmental monitoring system	39
5.9	Instantiation I: Virtual world interfacing with TV platforms .a.i	40
•	System architecture for virtual world interfacing with TV platform	40
•	Instantiation I.1: The TV platform as a virtual worlds I/O device	41
5.10	Instantiation J: Seamless integration between real and virtual worlds	
•	System architecture for seamless integration between real and virtual worlds	42
•	Instantiation J.1: Seamless interaction between real and virtual worlds with integrating	
	virtual and real sensors and actuators	42
5.11	Instantiation K: Hybrid communication	
5.12	Instantiation L: Makeup Avatar	
•	Spectrum data acquisition	
•	Spectrum data combination in a virtual world	
•	Cosmetic color spectrum metamerism	
•	Color reproduction process for a virtual makeup avatar	
•	Transformation model generation	
•	Makeup simulation usage example	
5.13	Instantiation M: Usage Scenario for automobile sensors	
•	Helping auto maintenance/regular inspection	
•	Monitoring for Eco-friendly driving	53
Biblio	ography	55

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: https://standards.iteh.ai/catalog/standards/sist/94201663-7594-4994-9ab3-

The committee responsible for this document is ISOAEC JTC 1, Information technology, SC 29, Coding of audio, picture, multimedia and hypermedia information.

This third edition cancels and replaces the second edition (ISO/IEC 23005-1:2014), which has been technically revised.

ISO/IEC 23005 consists of the following parts, under the general title *Information technology — Media context* and control:

- Part 1: Architecture
- Part 2: Control information
- Part 3: Sensory information
- Part 4: Virtual world object characteristics
- Part 5: Data formats for interaction devices
- Part 6: Common types and tools
- Part 7: Conformance and reference software

Introduction

The usage of multimedia content is becoming omnipresent in everyday life, in terms of both consumption and production. On the one hand, professional content is provided to the end user in high-definition quality, streamed over heterogeneous networks, and consumed on a variety of different devices. On the other hand, user-generated content overwhelms the Internet with multimedia assets being uploaded to a wide range of available Web sites. That is, the transparent access to multimedia content, also referred to as Universal Multimedia Access (UMA), seems to be technically feasible. However, UMA mainly focuses on the end-user devices and network connectivity issues, but it is the user who ultimately consumes the content. Hence, the concept of UMA has been extended to take the user into account, which is generally referred to as Universal Multimedia Experience (UME).

However, the consumption of multimedia assets can also stimulate senses other than vision or audition, e.g., olfaction, mechanoreception, equilibrioception, or thermoception. That is, in addition to the audio-visual content of, for example, a movie, other senses shall also be stimulated giving the user the sensation of being part of the particular media which shall result in a worthwhile, informative user experience.

This motivates the annotation of the media resources with metadata as defined in this part of ISO/IEC 23005 that steers appropriate devices capable of stimulating these other senses.

ISO/IEC 23005 (MPEG-V) provides an architecture and specifies associated information representations to enable the interoperability between virtual worlds, for example, digital content provider of a virtual world, (serious) gaming, simulation, DVD, and with the real world, for example, sensors, actuators, vision and rendering, robotics (e.g. for revalidation), (support for) independent living, social and welfare systems, banking, insurance, travel, real estate, rights management and many others.

Virtual worlds 1) (often referred to as 3D3C for 3D visualization & navigation and the 3C's of community, creation and commerce) integrate existing and emerging (media) technologies (e.g. instant messaging, video, 3D, VR, AI, chat, voice, etc.) that allow for the support of existing and the development of new kinds of social networks. The emergence of virtual worlds as platforms for social networking is recognized by businesses as an important issue for at least two reasons:

- a) it offers the power to reshape the way companies interact with their environments (markets, customers, suppliers, creators, stakeholders, etc.) in a fashion comparable to the Internet;
- b) it allows for the development of new (breakthrough) business models, services, applications and devices.

Each virtual world however has a different culture and audience making use of these specific worlds for a variety of reasons. These differences in existing metaverses permit users to have unique experiences. Resistance to real-world commercial encroachment still exists in many virtual worlds where users primarily seek an escape from real life. Hence, marketers should get to know a virtual world beforehand and the rules that govern each individual universe.

Although realistic experiences have been achieved via devices such as 3-D audio/visual devices, it is hard to realize sensory effects only with presentation of audiovisual contents. The addition of sensory effects leads to even more realistic experiences in the consumption of audiovisual contents. This will lead to the application of new media for enhanced experiences of users in a more realistic sense.

Such new media will benefit from the standardization of a control and sensory information which can include sensory effect metadata, sensory device (actuator) capabilities/commands, user's sensory preferences, and

¹⁾ Some examples of virtual worlds are: Second Life (http://secondlife.com/), IMVU (http://www.imvu.com/) and Entropia Universe (http://www.entropiauniverse.com/).

various delivery formats. The MPEG-V architecture can be applicable for various business models for which audiovisual contents can be associated with sensory effects that need to be rendered on appropriate sensory devices (actuators).

Multi-user online virtual worlds, sometimes called Networked Virtual Environments (NVEs) or massively-multiplayer online games (MMOGs), have reached mainstream popularity. Although most publications tend to focus on well-known virtual worlds like *World of Warcraft*, *Second Life*, and *Lineage*, there are hundreds of popular virtual worlds in active use worldwide, most of which are not known to the general public. These can be quite different from the above-mentioned titles. To understand current trends and developments, it is useful to keep in mind that there is large variety in virtual worlds and that they are not all variations on *Second Life*.

The concept of online virtual worlds started in the late 70s with the creation of the text-based Dungeons & Dragons world MUD. In the eighties, larger-scale graphical virtual worlds followed, and in the late nineties the first 3D virtual worlds appeared. Many virtual worlds are not considered games (MMOGs) since there is no clear objective and/or there are no points to score or levels to achieve. In this report we will use "virtual worlds" as an umbrella term that includes all possible varieties. See the literature for further discussion of the distinction between gaming/non-gaming worlds. Often, a virtual world which is not considered to be an MMOG does contain a wide selection of mini-games or quests, in some way embedded into the world. In this manner a virtual world acts like a combined graphical portal offering games, commerce, social interactions and other forms of entertainment. Another way to see the difference: games contain mostly pre-authored stories; in virtual worlds the users more or less create the stories themselves. The current trend in virtual worlds is to provide a mix of pre-authored and user-generated stories and content, leading to user-modified content.

Current virtual worlds are graphical and rendered in 2D, 2.5 D (isometric view) or 3D, depending on the intended effect and technical capabilities of the platform: web-browser, gaming PC, average PC, game console, mobile phone, and so on TANDARD PREVIEW

"Would it not be great if the real world economy could be boosted by the exponential growing economy of the virtual worlds by connecting the virtual - and real world"; in 2007 the Virtual Economy in Second Life alone was around 400 MEuro, a factor nine growth from 2006. The connected devices and services in the real world can represent an economy of a multiple of this virtual world economy.

Virtual worlds have entered our lives, our communication patterns, our culture, and our entertainment never to leave again. It's not only the teenager active in *Second Life* and *World of Warcraft*, the average age of a gamer is 35 years by now, and it increases every year. This does not even include role-play in the professional context, also known as serious gaming, inevitable when learning practical skills. Virtual worlds are in use for entertainment, education, training, obtaining information, social interaction, work, virtual tourism, reliving the past and forms of art. They augment and interact with our real world and form an important part of people's lives. Many virtual worlds already exist as games, training systems, social networks and virtual cities and world models. Virtual worlds will change every aspect of our lives: the way we work, interact, play, travel and learn. Games will be everywhere and their societal need is very big and will lead to many new products and require many companies.

Technology improvement, both in hardware and software, forms the basis of this. It is envisaged that the most important developments will occur in the areas of display technology, graphics, animation, (physical) simulation, behavior and artificial intelligence, loosely distributed systems and network technology.

The figures in this part of ISO/IEC 23005 have been reproduced here with the permission of Samsung, Sharp Electronics, ETRI, University of Klagenfurt, Institute of Science and Technology, Myongji University, Institut national des télécommunications and the partners of the ITEA2 project Metaverse1: Philips, Forthnet S.A., Alcatel-Lucent Bell N.V., Innovalia, Alcatel-Lucent France, Technicolor, Orange Labs, DevLab, CBT, Nextel, Carsa, Avantalia, Ceesa, Virtualware, I&IMS, VicomTECH, E-PYME, CIC Tour Gune, Artefacto, Metaverse Labs, Technical University Eindhoven, Utrecht University, University of Twente, Stg. EPN, VU Economics & BA, VU CAMERA, Ellinogermaniki Agogi, IBBT-SMIT, UPF-MTG, CEA List and Loria/Inria Lorraine.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/IEC 23005-1:2016 https://standards.iteh.ai/catalog/standards/sist/9420f663-7594-4994-9ab3-57d2fa0073f0/iso-iec-23005-1-2016

Information technology — Media context and control — Part 1: Architecture

Part 1:

Architecture

1 Scope

This part of ISO/IEC 23005 specifies the architecture of MPEG-V (media context and control), its three associated use cases of information adaptation from virtual world to real world, information adaptation from real world to virtual world, and Information exchange between virtual worlds.

2 Terms and definitions STANDARD PREVIEW

2.1 Device Command

(standards.iteh.ai)

description of controlling actuators used to generate Sensory Effects

https://standards.iteh.ai/catalog/standards/sist/9420f663-7594-4994-9ab3ation 57d2fa0073f0/iso-iec-23005-1-2016

2.2 R → V Adaptation

procedure that processes the Sensed Information from the real world in order to be consumed within the virtual world's context; takes the Sensed Information with/without the Sensor Capabilities from Sensors, the Sensor Adaptation Preferences from Users, and/or the Virtual World Object Characteristics from a Virtual

world; controls the Virtual World Object Characteristics or adapts the Sensed Information by adapting the Sensed Information based on the Sensor Capabilities and/or the Sensor Adaptation Preferences

2.3 Sensed Information

information acquired by sensors

2.4 Sensor

device by which user input or environmental information can be gathered

EXAMPLES Temperature sensor, distance sensor, motion sensor, etc.

2.5 Sensor Adaptation Preferences

description schemes and descriptors to represent (user's) preferences with respect to adapting sensed information

2.6 Sensor Capability

description of representing the characteristics of sensors in terms of the capability of the given sensor such as accuracy, or sensing range

2.7 Sensory Device

consumer device by which the corresponding sensory effect can be made

NOTE Real world devices can contain any combination of sensors and actuators in one device.

2.8 Sensory Device Capability

description of representing the characteristics of actuators used to generate sensory effects in terms of the capability of the given device

2.9 Sensory Effects

effects to augment perception by stimulating human senses in a particular scene

EXAMPLES Scent, wind, light, haptic [kinesthetic-force, stiffness, weight, friction, texture, widget (button, slider, joystick, etc.), tactile: air-jet, suction pressure, thermal, current, vibration, etc. Note that combinations of tactile display can also provide directional, shape information].

2.10 Sensory Effect Metadata

metadata that defines the description schemes and descriptors to represent sensory effects

2.11 User's Sensory Preferences

iTeh STANDARD PREVIEW

description schemes and descriptors to represent (user's) preferences with respect to rendering of sensory effect (standards.iteh.ai)

2.12 User

ISO/IEC 23005-1:2016

the end user of the system. https://standards.iteh.ai/catalog/standards/sist/9420f663-7594-4994-9ab3-57d2fa0073f0/iso-iec-23005-1-2016

2.13 Virtual World

digital content, real time or non real time, of various nature ranging from an on-line virtual world, simulation environment, multi-user game, a broadcasted multimedia production, a peer-to-peer multimedia production or packaged content like a DVD or game

2.14 V → R Adaptation

procedure that processes the Sensory Effects from the Virtual World in order to be consumed within the real world's context; takes Sensory Effect Metadata from a Virtual World, Sensory Device (Actuator) Capabilities from the Sensory Devices (Actuators), the User's Sensory Preferences from users, and/or the Sensed Information as well as the Sensor Capabilities from Sensors as inputs; generates the Device Commands by adapting the Sensory Effects based on the Sensed Information, the Capabilities and/or the Preferences

2.15 VW Object Characteristics

description schemes and descriptors to represent and describe virtual world objects (from the real world into the virtual world and vice versa)

3 MPEG-V System Architecture

Figure 1 — A strong connection (defined by an architecture that provides interoperability trough standardization) between the virtual and the real world is needed to reach simultaneous reactions in both worlds to changes in the environment and human behavior. Efficient, effective, intuitive and entertaining

interfaces between users and virtual worlds are of crucial importance for their wide acceptance and use. To improve the process of creating virtual worlds a better design methodology and better tools are indispensible. For fast adoption of virtual world technologies we need a better understanding of their internal economics, rules and regulations. The overall system architecture for the MPEG-V framework is depicted in エラー! 参照元が見つかりません.

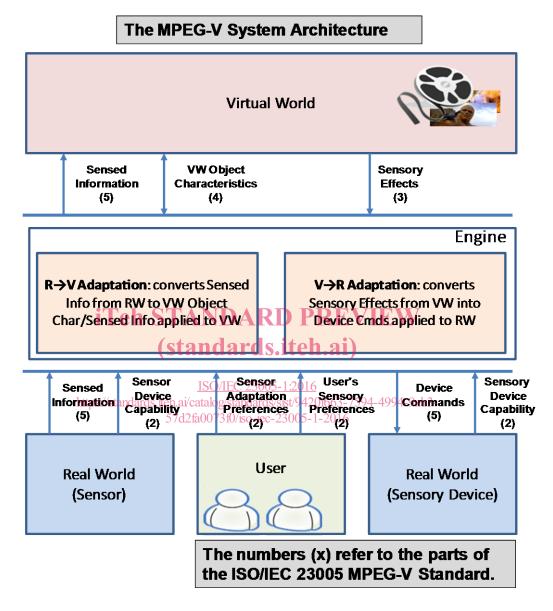


Figure 1 — System Architecture of the MPEG-V Framework

The MPEG-V System Architecture can be used to serve three different media exchanges. There are two types of media exchanges occurring between real world and virtual world, i.e., the information exchange from real world to virtual world and the information exchange from virtual world to real world. An additional type of media exchanges is the information exchange between virtual worlds. The three media exchanges are defined as use cases in Clause 4.

It is important to note that Sensory Effect Metadata, Sensory Device Capability, User's Sensory Preferences, Device Commands, Sensed Information, Sensor Device Capability, Sensor Adaptation Preferences, and Virtual World Object Characteristics are within the scope of standardization and, thus shall be normatively specified. On the other side, the $V \rightarrow R$ Adaptation Engine, $V \rightarrow R$ Adaptation Engine, Virtual World, as well as Devices (Sensors and Sensory devices) are informative and are left open for industry competition.

ISO/IEC 23005-1:2016(E)

Metadata within the scope is formed other parts of the ISO/IEC 23005. Sensor Device Capability, Sensory Device Capability, Sensor Adaptation Preferences, and User's Sensory Preferences are specified in Part 2: Control information. Sensory Effect Metadata is specified in Part 3: Sensor information. Virtual World Object Characteristics is specified in Part 4: Virtual world object characteristics. Device Commands and Sensed Information are specified in Part 5: Formats for interaction devices.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/IEC 23005-1:2016 https://standards.iteh.ai/catalog/standards/sist/9420f663-7594-4994-9ab3-57d2fa0073f0/iso-iec-23005-1-2016

4 Use cases

The three media exchanges require information adaptations in order for a targeting world to adapt information based on capabilities and preferences: information adaptation from virtual world to real world, information adaptation from real world to virtual world, and information adaptation between virtual worlds.

4.1 Information adaptation from virtual world to real world

System Architecture for information adaptation from virtual world to real world

The system architecture for the information adaptation from virtual world to real world is depicted in **Figure 2**. It represents $V \rightarrow R$ adaptation comprising Sensory Effect Metadata, VW Object Characteristics, Sensory Device Capability (actuator capability), Device Commands, User's Sensory Preferences, and a $V \rightarrow R$ Adaptation Engine which generates output data based on its input data.

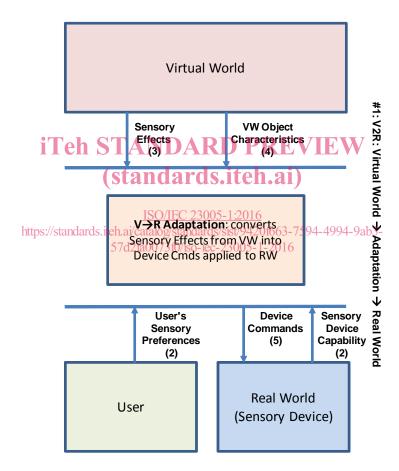


Figure 2 — (Possible) System Architecture for information adaptation from virtual world to real world

A virtual world within the framework is referred to as an entity that acts as the source of the sensory effect metadata and VW Object Characteristics such as a broadcaster, content creator/distributor, or even a service provider. The $V \rightarrow R$ Adaptation Engine is an entity that takes the sensory effect metadata, the sensory device (actuator) capability and the user's sensory preferences as inputs and generates the device commands based those in order to control the consumer devices enabling a worthwhile, informative experience to the user.

Real world devices (sensory devices) are entities that act as the sink of the device commands and act as the source of sensory device (actuator) capability. Additionally, entities that provide user's sensory preferences towards the RoSE engine are also collectively referred to as real world devices. Note that sensory devices (actuators) are sub-set of real world devices including fans, lights, scent devices, human input devices such as a TV set with a remote control (e.g., for preferences).

The actual sensory effect metadata provides means for representing so-called sensory effects, i.e., effects to augment feeling by stimulating human sensory organs in a particular scene of a multimedia application. Examples of sensory effects are scent, wind, light, etc. The means for transporting this kind of metadata is referred to as sensory effect delivery format which, of course, could be combined with an audio/visual delivery format, e.g., MPEG-2 transport stream, a file format, or Real-time Transport Protocol (RTP) payload format, etc.

The sensory device capability defines description formats to represent the characteristics of sensory devices (actuators) in terms of which sensory effects they are capable to perform and how. A sensory device (actuator) is a consumer device by which the corresponding sensory effect can be made (e.g., lights, fans, heater, fan, etc.). Device commands are used to control the sensory devices (actuators). As for sensory effect metadata, also for sensory device (actuator) capability and device commands corresponding means for transporting this assets are referred to as sensory device capability/commands delivery format respectively.

Finally, the user's *sensory preferences* allow for describing preferences of the actual (end) users with respect to rendering of *sensory effects* for also a delivery format is provided.

4.2 Information adaptation from real world to virtual world

System Architecture for information adaptation from real world to virtual world

The system architecture for information adaptation from real world to virtual world is depicted in Figure 3. It represents R2V adaptation comprising *VW Object Characteristics*, *Sensed Information*, *Sensor Capability*, *Sensor Adaptation Preferences*, and an *R*→*V Adaptation Engine* which generates output data based on its input data.

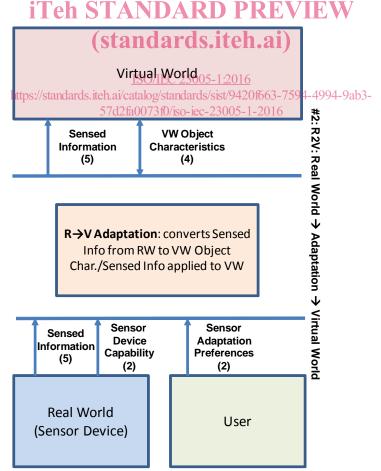


Figure 3 — (Possible) System Architecture for information adaptation from real world to virtual world

Entity that processes the Sensed Information from the real world in order to be consumed within the virtual world's context; takes the Sensed Information with/without the Sensor Capabilities from Sensors, the Sensor Adaptation Preferences from Users, and/or the Virtual World Object Characteristics from a Virtual world; controls the Virtual World Object Characteristics or adapts the Sensed Information by adapting the Sensed Information based on the Sensor Capabilities and/or the Sensor Adaptation Preferences.

There are two possible implementations to adapt information from real world to virtual world. In the first system implementation, $R \rightarrow V$ adaptation takes the Sensor Capabilities as inputs, the Sensed Information from Sensors, and Sensor Adaptation Preferences from Users; adapts the Sensed Information based on the Sensor Capabilities and/or Sensor Adaptation Preferences.

In the second system implementation, R→V adaptation takes the Sensed Information with/without the Sensor Capabilities from Sensors, the Sensor Adaptation Preferences from Users, and/or the Virtual World Object Characteristics from a Virtual world; controls the Virtual World Object Characteristics adapting the Sensed Information based on the Sensor Capabilities and/or the Sensor Adaptation Preferences.

4.3 Information exchange between virtual worlds

System Architecture for exchanges between virtual worlds

The system architecture for information exchange between virtual worlds is depicted in Figure 4. It represents information exchange comprising *VW Object Characteristics* which generates exchangeable information within virtual worlds.

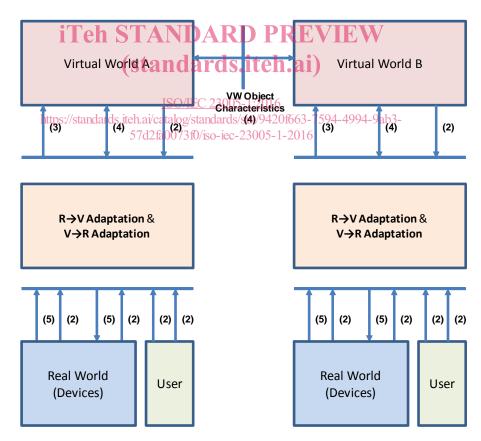


Figure 4 — (Possible) System Architecture for (bidirectional) exchange of information between virtual worlds

 $V \rightarrow V$ adaptation adapts proprietary virtual world object characteristics from a Virtual World to VW Object Characteristics and sends the VW Object Characteristics from the Virtual World to another Virtual World to support interoperability. Based on the data provided in Virtual World Object Characteristics, the Virtual World will internally adapt its own representation for virtual object/avatar.