

SLOVENSKI STANDARD SIST EN 12895:2015+A1:2019

01-november-2019

Vozila za talni transport - Elektromagnetna združljivost - Dopolnilo A1

Industrial trucks - Electromagnetic compatibility

Flurförderzeuge - Elektromagnetische Verträglichkeit

Chariots de manutention - Compatibilité électromagnétique

Ta slovenski standard je istoveten z: EN 12895:2015+A1:2019

ICS:

33.100.01 Elektromagnetna združljivost Electromagnetic compatibility

na splošno in general

53.060 Industrijski tovornjaki Industrial trucks

SIST EN 12895:2015+A1:2019 en,fr,de

SIST EN 12895:2015+A1:2019

EUROPEAN STANDARD NORME EUROPÉENNE EUROPÄISCHE NORM EN 12895:2015+A1

August 2019

ICS 33.100.01; 53.060

Supersedes EN 12895:2015

English Version

Industrial trucks - Electromagnetic compatibility

Chariots de manutention - Compatibilité électromagnétique

Flurförderzeuge - Elektromagnetische Verträglichkeit

This European Standard was approved by CEN on 17 July 2015 and includes Amendment 1 approved by CEN on 12 February 2019.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia; Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

Cont	ents	Page
Europ	ean foreword	3
Introd	luction	3
1	Scope	5
2	Normative references	5
3	Terms and definitions	
4	Requirements	7
4.1	Emission	
4.2	Immunity	8
5	Tests	9
5.1	General	
5.2	Emission test of electromagnetic fields	
5.2.1	General	
5.2.2	Test and measurement equipment	10
5.2.3	Test procedure	10
5.2.4	Test of the driving system	11
5.2.5	Test of load handling system with electric motor drive	
5.2.6	Test of the power steering system with electric motor drive	12
5.2.7	Test of the auxiliary electrical equipment	12
5.3	Immunity test against electromagnetic radiation	12
5.3.1	General	12
5.3.2	Test and measurement equipment	13
5.3.3	Basic test procedure	13
5.3.4	Test of driving system at zero speed	
5.3.5 5.3.6	Test of the driving system at low rotational speed Test of load handling system	14
5.3.6		
5.3.7 5.3.8	Test of the electric power steering system	
5.3.8	Test of the auxiliary electrical equipment	
5.4 5.5	Immunity test against electrostatic discharge Immunity test against auxiliary magnetic field	
3.3		
6	Test report	16
Annex	x ZA (informative) Relationship between this European Standard and the essential requirements of Directive 2014/30/EU [2014 OI L96] aimed to be covered	17

European foreword

This document (EN 12895:2015+A1:2019) has been prepared by Technical Committee CEN/TC 150 "Industrial trucks - Safety", the secretariat of which is held by BSI.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by February 2020, and conflicting national standards shall be withdrawn at the latest by February 2020.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document includes Amendment 1 approved by CEN on 12 February 2019.

This document supersedes (A) EN 12895:2015 (A).

The start and finish of text introduced or altered by amendment is indicated in the text by tags [A].

- (A) The main changes compared to the previous version are:
- updated normative references;
- new Annex ZA;
- minor typographic corrections.

This document has been prepared under a mandate given to CEN by the European Commission and the European Free Trade Association, and supports essential requirements of EU Directive(s).

For relationship with EU Directive(s), see informative A Annex ZA, which is A an integral part of this document.

According to the CEN-CENELEC Internal Regulations, the national standards organisations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

Introduction

With the use of electronic devices in areas where industrial trucks operate, there is a need to ensure that industrial trucks are provided with adequate immunity to external electromagnetic fields. As industrial trucks are fitted with electrical and electronic devices, there is a need to ensure that emission of electromagnetic fields from the trucks meets acceptable limits.

High frequency electrical disturbances emerge during the normal operation of many parts of the industrial trucks and systems. They are generated within a large frequency range with different electrical characteristics.

Electrostatic discharges are relevant to industrial trucks.

The test methods and acceptance criteria included in this document are suitable for industrial trucks in view the specific characteristics and the operating parameters of this machinery; the tests have been designed to reflect the construction of industrial trucks.

Two approaches are described to achieve compliance:

- complete truck tests;
- electrical/electronic systems with the components in the same configuration as in the truck.

In some situations trucks can be foreseen to be used in environments where the level of electromagnetic disturbances are likely to exceed the test levels within the scope of this European Standard. In these situations, levels and/or frequencies outside the specified test parameters will need to be applied. In addition, many areas are not homogeneous for their EMC classification; for example, hospitals and airports have areas with different levels of classifications, for the areas outside the generic standard definitions special rules can be applicable.

1 Scope

This European Standard is applicable to industrial trucks, regardless of the power source (called only trucks) as defined in [A] ISO 5053-1:2015 [A], and their electrical/electronic systems when used in residential, commercial, light industry and industrial environments (specified in EN 61000-6-3:2007 and EN 61000-6-2:2005).

This European Standard specifies:

- the requirements and the limit values for electromagnetic emission and immunity to external electromagnetic fields;
- the procedure and criteria for testing trucks and their electrical/electronic systems.

This European Standard is not applicable to:

- non-stacking low-lift straddle carriers;
- stacking high-lift straddle carriers;
- any pedestrian propelled trucks, excepted those which are equipped with load handling devices which have electrical powered lifting devices;
- trucks intended for use in the public domain with maximum speed exceeding 30 km/h;
- positioning system of driverless industrial trucks;
- interaction between systems on the trucks;
- interference to on-board radio equipment;
- equipment connected to AC-mains which is only used when the truck is not being operated (e.g. on board charger).

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

- EN 55012:2007²⁾, Vehicles, boats and internal combustion engines Radio disturbance characteristics Limits and methods of measurement for the protection of off-board receivers (A)
- A) EN 55016-1-1:2010³⁾, Specification for radio disturbance and immunity measuring apparatus and methods Part-1-1: Radio disturbance and immunity measuring apparatus Measuring apparatus (CISPR 16-1-1:2010)
- [A] EN 55016-1-4:2010⁴), Specification for radio disturbance and immunity measuring apparatus and methods Part 1-4: Radio disturbance and immunity measuring apparatus Antennas and test sites for radiated disturbance measurements (CISPR 16-1-4:2010) (A)

¹⁾ For trucks used in the public domain, other specific European Directives and national requirements are to be applied.

⁽A) 2) This document is impacted by the amendment EN 55012:2007/A1:2009. (A)

⁽A) 3) This document is impacted by the amendments EN 55016-1-1:2010/A1:2010 and EN 55016-1-1:2010/A2:2014.

- (A) EN 55016-2-3:2017, Specification for radio disturbance and immunity measuring apparatus and methods - Part 2-3: Methods of measurement of disturbances and immunity - Radiated disturbance measurements (A1
- (EMC) Part 4-2: Testing and measurement techniques — Electrostatic discharge immunity test (IEC 61000-4-2)
- A EN 61000-4-3:2006⁵⁾ (A lectromagnetic compatibility (EMC) Part 4-3: Testing and measurement techniques — Radiated, radio-frequency, electromagnetic field immunity test (IEC 61000-4-3)
- (A) EN 61000-4-8:2010 (A), Electromagnetic compatibility (EMC) Part 4-8: Testing and measurement techniques — Power frequency magnetic field immunity test (IEC 61000-4-8)
- EN 61000-6-2:2005, Electromagnetic compatibility (EMC) Part 6-2: Generic standards Immunity for industrial environments (IEC 61000-6-2:2005)
- A EN 61000-6-3:2007 (A), Electromagnetic compatibility (EMC) Part 6-3: Generic standards Emission standard for residential, commercial and light-industrial environments (IEC 61000-6-3:2006)
- $|A\rangle$ EN ISO 3691-1:2015 $|A\rangle$, Industrial trucks Safety requirements and verification Part 1: Selfpropelled industrial trucks, other than driverless trucks, variable-reach trucks and burden-carrier trucks (ISO 3691-1:2011)
- (A) ISO 5053-1:2015, Industrial trucks Terminology and classification Part 1: Types of industrial trucks (A1

3 Terms and definitions

For the purposes of this document, the terms and definitions given in applicable parts of EN ISO 3691 and the following apply.

3.1

test sample

truck and/or electrical/electronic system, electrical machines, system configuration for subjecting to type test

Note 1 to entry: Motors and generators are examples of electrical machines.

The system configuration is set up with maximum cable and harness lengths. Note 2 to entry:

3.2

electrical/electronic system

electrical/electronic component(s) or a set of components intended to be part of a machine together with any associated electrical connections and wiring, that performs one or more specialized functions and operates on its own

Note 1 to entry: Also referred to as system.

⁽A) 4) This document is impacted by the amendments EN 55016-1-4:2010/A1:2012 and EN 55016-1-4:2010/A2:2017.

^{♠ 5)} This document is impacted by the amendments EN 61000-4-3:2006/A1:2008 and EN 61000-4-3:2006/A2:2010. ♠

⁽A) 6) This document is impacted by the amendment EN 61000-6-3:2007/A1:2011.

3.3

narrowband emission

emission that has a bandwidth less than that of a measuring apparatus or receiver

Note 1 to entry: The bandwidth set at 9 kHz from 0,15 MHz - 30 MHz and 120 kHz above 30 MHz.

Note 2 to entry: Electrical components will radiate emissions of narrow- or broadband type.

3.4

broadband emission

emission that has a bandwidth greater than that of a measuring apparatus or receiver

Note 1 to entry: The bandwidth set at 9 kHz from 0,15 MHz - 30 MHz and 120 kHz above 30 MHz.

Note 2 to entry: High voltage ignition system will radiate broadband emissions.

4 Requirements

4.1 Emission


For trucks/systems the limit values for the electric field at 10 m distance from the truck with an antenna height of 3 m shall be in accordance with Figure 1.

30 MHz to 75 MHz 34 dB μ V/m

75 MHz to 400 MHz 34 dB μ V/m to 45 dB μ V/m increasing in direct proportion with the

frequency

400 MHz to 1 000 MHz 45 dB μV/m

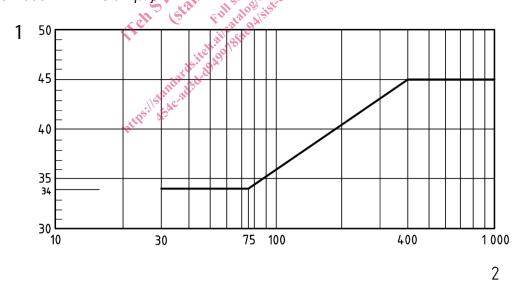

Key

- 1 electric field (dB μ V/m)
- 2 frequency (MHz)

Figure 1 — Maximum limits of electromagnetic emissions

For trucks that can be connected to the AC-mains network while operational, in addition to the above the limits stated in [A] Table 1 of EN 61000-6-3:2007 (A] shall be met.

4.2 Immunity

For trucks/systems the immunity to electromagnetic environments shall be above or equal to the limit values specified in Table 1 when tested in accordance to the test methods specified in Table 1.

Table 1 — Immunity - Enclosure port

	Tuble 1 Immunity Enclosure port								
	Environmental Phenomena	Limit values	Units	Normative references	Test in accordance with clause				
1. Truck									
1.1	Electromagnetic field:			A1) EN 61000-4-3:2006 (A1	5.3				
	- Frequency	27 – 1 000	MHz						
	- Strength	20	V/m (unmodulated,rms)						
	- Amplitude modulated	80	% AM (1 kHz)						
1.2	Electromagnetic field:			A) EN 61000-4-3:2006 (A)	5.3				
	- Frequency	>1,0 - 2,0	GHz	3310					
	- Strength	3	V/m (unmodulated,rms)	EN 61000-4-3:2006 (A)					
	- Amplitude modulated	80	(unmodulated,rms) % AM (1 kHz)	Kital and July					
1.3	Electromagnetic field:			• • • • • • • • • • • • • • • • • • •	5.3				
	- Frequency	> 2,0 - 2,7	GHz Stantu kull standystate V/m hailastas standystate						
	- Strength	1	V/m (unmodulated,rms)						
	- Amplitude modulated	80	% AM (1 kHz)						
1.4	Electrostatic discharge:	•	nths: "Ash	♠ EN 61000-4-2:2009 ♠	5.4				
	- Charge voltage	8 Contact	kV (330Ω - 150pF)	(Level 4)					
		15 Air discharge							
2. Components test									
2.1	Magnetic field:				5.5				
	- Frequency	0	Hz	Test					
	- Time period	3	s	arrangement					
	- Strength	1 000	A/m (1A/m≈ 1.257 μT)	according to					
				A1) EN 61000-4-8:2010 (A1)					
2.2	Magnetic field:				5.5				
	- Frequency	50	Hz	Test					
	- Time period	3	s	arrangement					
	- Strength	30	A/m (1A/m ≈ 1.257 μT)	according to A1) EN 61000-4-8:2010 (A1)					