
**Vezni elementi - Vijaki s sploščeno polkrožno glavo z manjšo obremenljivostjo - 1.
del: Sploščena polkrožna glava z notranjim šestkotnikom (ISO/DIS 7380-1:2021)**

Fasteners - Button head screws with reduced loadability - Part 1: Hexagon socket button head screws (ISO/DIS 7380-1:2021)

Mechanische Verbindungselemente - Schrauben mit abgeflachtem Halbrundkopf mit reduzierter Belastbarkeit - Teil 1: Schrauben mit abgeflachtem Halbrundkopf mit Innensechskant (ISO/DIS 7380-1:2021)

Fixations - Vis à tête cylindrique bombée plate à capacité de charge réduite - Partie 1: Tête cylindrique bombée plate à six pans creux (ISO/DIS 7380-1:2021)

<https://standards.iteh.ai/catalog/standards/sist/e111d0b0-3410-4d96-8287-4092625da979/osist-pren-iso-7380-1-2022>

Ta slovenski standard je istoveten z: prEN ISO 7380-1

ICS:

21.060.10 Sorniki, vijaki, stebelni vijaki Bolts, screws, studs

oSIST prEN ISO 7380-1:2022

en,fr,de

iTeh STANDARD PREVIEW (standards.iteh.ai)

oSIST prEN ISO 7380-1:2022

<https://standards.iteh.ai/catalog/standards/sist/e111d0b0-3410-4d96-8287-4092625da979/osist-pren-iso-7380-1-2022>

DRAFT INTERNATIONAL STANDARD

ISO/DIS 7380-1

ISO/TC 2/SC 11

Secretariat: DIN

Voting begins on:
2021-11-15Voting terminates on:
2022-02-07

Fasteners — Button head screws with reduced loadability —

Part 1: Hexagon socket button head screws

Partie 1: Tête cylindrique bombée plate à six pans creux

ICS: 21.060.10

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[oSIST prEN ISO 7380-1:2022](https://standards.iteh.ai/catalog/standards/sist/e111d0b0-3410-4d96-8287-4092625da979/osist-pren-iso-7380-1-2022)<https://standards.iteh.ai/catalog/standards/sist/e111d0b0-3410-4d96-8287-4092625da979/osist-pren-iso-7380-1-2022>

This document is circulated as received from the committee secretariat.

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

ISO/CEN PARALLEL PROCESSING



Reference number
ISO/DIS 7380-1:2021(E)

© ISO 2021

iTeh STANDARD PREVIEW (standards.iteh.ai)

oSIST prEN ISO 7380-1:2022

<https://standards.iteh.ai/catalog/standards/sist/e111d0b0-3410-4d96-8287-4092625da979/osist-pren-iso-7380-1-2022>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Dimensions	2
5 Requirements and reference International Standards	5
6 Marking and labelling	7
6.1 Marking on product.....	7
6.2 Labelling on package.....	7
7 Designation	8
Bibliography	9

iTeh STANDARD PREVIEW (standards.iteh.ai)

oSIST prEN ISO 7380-1:2022

<https://standards.iteh.ai/catalog/standards/sist/e111d0b0-3410-4d96-8287-4092625da979/osist-pren-iso-7380-1-2022>

ISO/DIS 7380-1:2021(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 2, *Fasteners*, Subcommittee SC 11, *Fasteners with metric external thread*.

This second edition cancels and replaces the first edition (ISO 7380-1:2011), which has been technically revised.

The main changes compared to the previous edition are as follows:

- the whole standard including title has been improved to clearly point out that these hexagon socket button head screws have reduced loadability because of their head design (head dimensions and penetration of the hexagon socket);
- the reference thread length b has been increased to $3d$ for partially threaded screws M16, so that these screws can be tensile tested in accordance with ISO 3506-1 ($b \geq 3d$ is required to tensile test screws with reduced loadability);
- the reference datum for the outer diameter of the bearing face has been specified in accordance with other relevant product standards (see [Figure 1](#)), and the minimum values have been reduced to $d_{w,min} = d_{k,min} \times 0,92$ considering the manufacturing aspects for “button head” (see [Table 1](#));
- e_{min} values have been rounded to two decimal places (see [Table 1](#));
- the maximum depth of the hexagon socket t_{max} has been added (see [Table 1](#));
- the new symbol w_b has been introduced in [Figure 2](#) and [Table 1](#) instead of the symbol w in order to define the wall thickness between the bottom of the cylindrical hole (broached hole) and the bearing face.
- the definition of r_f in [Figure 1](#) has been changed to allow the offset of the centre of the radius from the thread axis;
- the rules for the smallest and greatest standardized nominal lengths have been added (see [Table 2](#));

- the minimum ultimate tensile loads were recalculated and have been changed to more precise values for M3 (property classes 10.9 and 70), M4 (property class 70), M5 (property classes 8.8, 70 and 80), M6 (property classes 10.9 and 70), M8 (property class 70), M10 (property classes 10.9 and 70), M12 (property classes 8.8 and 80) and M16 (property classes 8.8, 70 and 80), see [Table 4](#);
- property class 12.9/12.9 has been excluded for the screws with reduced loadability, and stainless steel grades A3 and A5 have been deleted from default stainless steel grades in [Table 3](#);
- a new [Clause 6](#), Marking and labelling, has been added.

A list of all parts in the ISO 7380 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[oSIST prEN ISO 7380-1:2022](#)

<https://standards.iteh.ai/catalog/standards/sist/e111d0b0-3410-4d96-8287-4092625da979/osist-pren-iso-7380-1-2022>

iTeh STANDARD PREVIEW (standards.iteh.ai)

oSIST prEN ISO 7380-1:2022

<https://standards.iteh.ai/catalog/standards/sist/e111d0b0-3410-4d96-8287-4092625da979/osist-pren-iso-7380-1-2022>

Fasteners — Button head screws with reduced loadability —

Part 1: Hexagon socket button head screws

1 Scope

This document specifies the characteristics of hexagon socket button head screws with reduced loadability due to head design with metric coarse pitch threads M3 to M16, and with product grade A.

NOTE The reduced loadability (related to the head dimensions in combination with penetration of the hexagon socket specified in this document) implies a limitation of ultimate tensile load. The loadability in the head is assumed to be 80% of that in the thread for all sizes and all property classes, see [Table 3](#).

If, in certain cases, other specifications are requested, stainless steel grades can be selected from ISO 3506-1, and the dimensional options from ISO 888 or ISO 4753.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 225, *Fasteners — Bolts, screws, studs and nuts — Symbols and descriptions of dimensions*

ISO 888, *Fasteners — Bolts, screws and studs — Nominal lengths and thread lengths*

ISO 898-1, *Mechanical properties of fasteners made of carbon steel and alloy steel — Part 1: Bolts, screws and studs with specified property classes — Coarse thread and fine pitch thread*

ISO 965-1, *ISO general purpose metric screw threads — Tolerances — Part 1: Principles and basic data*

ISO 1891-4, *Fasteners — Vocabulary — Part 4: Control, inspection, delivery, acceptance and quality*

ISO 3269, *Fasteners — Acceptance inspection*

ISO 3506-1, *Fasteners — Mechanical properties of corrosion-resistant stainless steel fasteners — Part 1: Bolts, screws and studs with specified grades and property classes*

ISO 4042, *Fasteners — Electroplated coatings*

ISO 4753, *Fasteners — Ends of parts with external ISO metric thread*

ISO 4759-1, *Tolerances for fasteners — Part 1: Bolts, screws, studs and nuts — Product grades A, B and C*

ISO 6157-1, *Fasteners — Surface discontinuities — Part 1: Bolts, screws and studs for general requirements*

ISO 8991, *Designation system for fasteners*

ISO 8992, *Fasteners — General requirements for bolts, screws, studs and nuts*

ISO 10683, *Fasteners — Non-electrolytically applied zinc flake coating systems*

3 Terms and definitions

No terms and definitions are listed in this document.


ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

4 Dimensions

Dimensions shall be in accordance with [Figure 1](#) to [Figure 3](#) and with [Table 1](#) and [Table 2](#).

Symbols and descriptions of dimensions are specified in ISO 225.

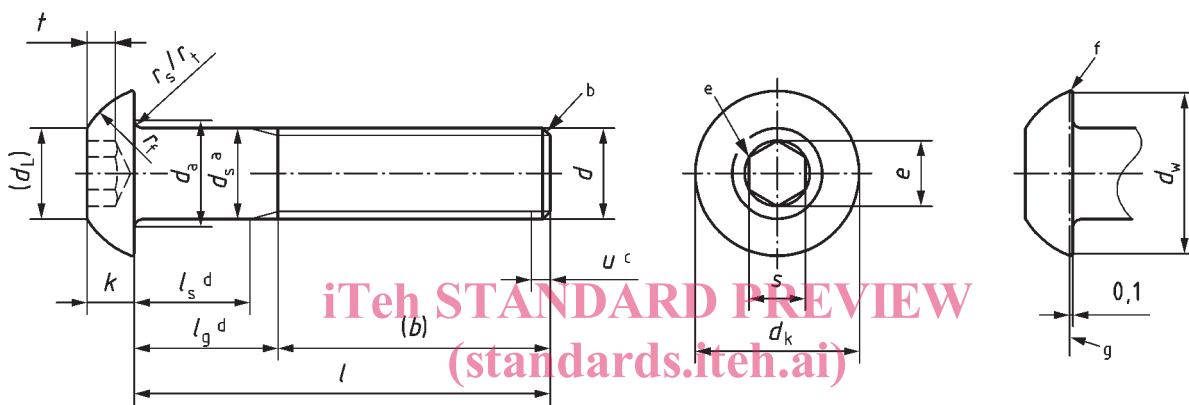

Key

- r_s underhead radius for a screw with unthreaded shank
- r_t underhead radius for a fully threaded screw
- a d_s only applies if $l_{s,min}$ is specified.
- b In accordance with ISO 4753 chamfered end (CH), or for sizes $\leq M4$ as rolled end (RL).
- c Incomplete thread $u \leq 2P$.
- d $l_{g,max} = l_{nom} - b$; $l_{s,min} = l_{g,max} - 5P$.
- e A slight rounding or countersink at the mouth of the socket is permissible.
- f Contour at the discretion of the manufacturer.
- g Reference datum for d_w .

Figure 1 — Hexagon socket button head screw