

SLOVENSKI STANDARD SIST EN 9722:2023

01-december-2023

Aeronavtika - Arhitektura za integrirano upravljanje stanja sistema

Aerospace series - Architecture for integrated management of a system's health condition

Luft- und Raumfahrt - Zentralisierte Architektur für das Zustandssystemmanagement

Série aérospatiale - Architecture pour la gestion intégrée de l'état de santé d'un système

Ta slovenski standard je istoveten z: EN 9722:2023

ICS:

49.020

Letala in vesoljska vozila na splošno

Aircraft and space vehicles in

general

SIST EN 9722:2023

en,fr,de

iTeh Standards (https://standards.iteh.ai) Document Preview

SIST EN 9722:2023

https://standards.iteh.ai/catalog/standards/sist/8ffd8ab2-5639-45f8-8105-0c182a81a859/sist-en-9722-2023

EUROPEAN STANDARD NORME EUROPÉENNE EUROPÄISCHE NORM

EN 9722

October 2023

ICS 49.020

English Version

Aerospace series - Architecture for integrated management of a system's health condition

Série aérospatiale - Architecture pour la gestion intégrée de l'état de santé d'un système

Luft- und Raumfahrt - Architektur für das integrierte Management eines Systemzustandes

This European Standard was approved by CEN on 4 September 2023.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and United Kingdom.

Document Preview

SIST EN 9722:2023

https://standards.iteh.ai/catalog/standards/sist/8ffd8ab2-5639-45f8-8105-0c182a81a859/sist-en-9722-2022



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Rue de la Science 23, B-1040 Brussels

EN 9722:2023 (E):2023

Cont	Contents		
Europ	oean foreword	4	
Intro	duction	5	
1	Scope	6	
2	Normative references	6	
3	Terms, definitions and acronyms	6	
3.1	Terms and definitions		
3.2	Acronyms		
4	Information on which this document is based		
4.1	Overview of maintenance		
4.1.1	Content of the health card		
4.1.2	Health card value chain		
4.1.3	Use of the health card		
4.2	Overview of maintenance		
4.2.1	General		
4.2.2	Structuring of maintenance in terms of level of impact	15	
4.2.3	Health card and example of coordination between stakeholders	15	
4.2.4	Health card and predictive maintenance	15	
4.3	Overview of services engineering	17	
4.3.1	Link between system engineering and services engineering		
4.3.2	Enterprise architecture applied to the support architecture		
4.3.3	Enterprise architecture modelling	18	
4.3.4	Presentation of contact/visibility/control lines	19	
4.3.5	Link between product and services		
4.3.6	Fundamental constraints and requirements		
5	Recommendations on architectures (ecosystem and product)		
5.1	General 18.11en.ai/catalog/standards/sist/8ffd8ab2-5639-4518-8105-0c182a81a855		
5.2	Functional architecture centred on the health card		
5.3	Example of support organization		
5.3.1	General		
5.3.2	Stakeholders and roles		
5.3.3	Breakdown of support into areas and roles		
5.4	Evolution of the organic value enhancement architecture		
6	Using the health card		
6.1	OODA Loop applied to the health condition of a system	38	
6.1.1	General		
6.1.2	Observe		
6.1.3	Capitalize		
6.1.4	Detect		
6.1.5	Diagnose		
6.1.6	Predict		
6.1.7	Decide		
6.1.8 6.1.9	Act/reactVisualize		
6.2	Capacity projection/reliability of projections		
U.2	- Capacity projection/renability or projections		

4343 predictive
nredictive
43
45
45
45
45
51
51
outside the 53
54
55
d prognostic
y models 58
58
58
58
60
61
62
62
63
64
64

European foreword

This document (EN 9722:2023) has been prepared by the Aerospace and Defence Industries Association of Europe — Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this document has received the approval of the National Associations and the Official Services of the member countries of ASD-STAN, prior to its presentation to CEN.

This document shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by April 2024, and conflicting national standards shall be withdrawn at the latest by April 2024.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this document: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Republic of North Macedonia, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Türkiye and the United Kingdom.

iTeh Standards (https://standards.iteh.ai) Document Preview

SIST EN 9722:2023

https://standards.iteh.ai/catalog/standards/sist/8ffd8ab2-5639-45f8-8105-0c182a81a859/sist-en-9722-2023

Introduction

An *equipment health card* contains the mandatory deadlines for its maintenance, as well as the history of maintenance technical operations. This chiefly concerns the log book.

A *system health card* contains all the health cards for the equipment of which it is comprised. It is managed, on the one hand based on the information contained in each equipment health card, in order to monitor maintenance scheduling and troubleshooting, and on the other hand based on system configuration at a given time which results from the equipment exchanges caused, for example, by system maintenance.

The system health card for the fleet includes all the health cards for the fleet systems.

Data dematerialization leads to transformation of the business and thus of its internal architecture and its external interactions, particularly through digital platforms. In addition, the numerous data sources and their real-time availability give more and more intrinsic value to each data item; their exploitation enables improved integrated management of the health condition of a system. This integrated management optimizes the existing services (data processing or maintenance services management) or even creates some new ones that will be proposed by the various stakeholders (actors) of the complete ecosystem.

This document provides recommendations about the centralization of the health data for a fleet of systems, such as an aircraft fleet for example, to ensure consistency between stakeholders (operators, repair facilities, designers, etc.) and the management of its health card.

These recommendations are based on a generic support organization proposal backed up by a product architecture for the system and its components.

The recommendations and diagrams in this document are functional and entail no constraints with respect to the organic architecture.

In this document, it is assumed that system health card access and management have a centralized address known to all, accessible to every rights holder, and within a time offered by dematerialization of data. No assumption is made regarding the location of health card data, which can be decentralized in a cloud, for example. In this document, the health card is said to be centralized because the rights holders access it in the same way, at the same address.

Data protection is a major issue, but one that is not dealt with in this document, because it is a more general question which goes beyond the scope of health card management.

The document is structured in the following way:

General reminders on the health card are given in Clause 4. Clause 5 is the heart of this document and gives recommendations about system and product architectures. Clause 6 presents the use of the health card to make fleet maintenance projections. If the reader wishes to explore the subject in greater depth, Clause 7 gives the precautions to be taken when handling data. Finally, the prospects are proposed in Clause 8.

1 Scope

This document is mainly aimed at all the trades which are actively involved in managing the health of a system.

Although it relies on examples of aeronautical systems, the expert group considers that this document is applicable for systems from other areas.

This document specifies the centralization of the health data for a fleet of systems, such as an aircraft fleet for example, to ensure consistency between stakeholders (operators, repair facilities, designers, etc.) and the management of its health card.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 13306, Maintenance — Maintenance terminology

EN 9721, Aerospace series — General recommendation for the BIT Architecture in an integrated system

3 Terms, definitions and acronyms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 9721 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at https://www.iso.org/obp/
- IEC Electropedia: available at https://www.electropedia.org/

Explanations of recurring terms are given in Table 1.

Table 1 — Terminology (1 of 2)

Terminology	Explanation
Aircraft	In this document, the term "aircraft" is used to illustrate a system.
Operator	The organization comprising the users and administrators.
Industrial contractor	Refers to an industrial stakeholder which, depending on the context, performs either maintenance services, or produces systems (aircraft for example) and equipment.
Corrective maintenance	Technical operations designed to return a faulty system to service.
Preventive maintenance	Technical operations designed to prevent failures.
Predictive maintenance	Preventive maintenance based on a prognosis of the level of damage (see 4.2.4).

Table 1 — Terminology (2 of 2)

Terminology	Explanation
Scheduled maintenance	Preventive maintenance based on calendar events, or a schedule (also called systematic maintenance).
On-condition maintenance	Preventive maintenance based on a level of damage, may be a counter or the result of operating tests (also called condition-based maintenance).
Owner	Owner of the aircraft fleet.
Maintenance service	Refers to the service activity.
Additional works	Maintenance work not stated in the initial work order and which was added further to the results of inspections and observations made during the work requested in this work order.
User	A person in charge of fleet operation.

3.2 Acronyms

The acronyms are explained in Table 2.

Table 2 — Acronyms (1 of 3)

Acronym	Explanation
A/D	Airworthiness Directive standards iteh ai
AOG	Aircraft On Ground
AOMP	Predictive Maintenance Operational Applications [Applications Opérationnelles de Maintenance Prévisionnelle]
ASL	Logistical Support Analysis [Analyse du Soutien Logistique]
BIT	Built-In Test
BNAE	Bureau de Normalisation de l'Aéronautique et de l'Espace
CAAC	Civil Aviation Administration of China
CAMM	Computer Aided Maintenance Management
CAMO	Continuing Airworthiness Management Organization
СВМ	Condition Based Maintenance
CRM	Maintenance Report [Compte Rendu de Maintenance] (document containing information including failures seen by the pilot in-flight)
CRS	Certificate to Release to Service
DB	Database
DMC	Direct Maintenance Cost
DOM	Director of Maintenance
DRL	Data Readiness Level

Table 2 — Acronyms (2 of 3)

Acronym	Explanation	
FIDES	Guide to reliability calculations	
FMS	Fleet Management System	
GSE	Ground Support Equipment	
HAZOP	HAZard and OPerability analysis	
HUMS	Health and Usage Monitoring System	
IATA	International Air Transport Association	
IoT	Internet of Things	
IVHM	Integrated Vehicle Health Management	
IVVQ	Integration, Verification, Validation and Qualification	
KPI	Key Performance Indicator	
LIS	Logistics information system	
MATMOM	Implementation and Maintenance Equipment [Matériel de Mise en Œuvre et de Maintenance]	
МСО	Maintenance in Operational Conditions	
MEL	Minimum Equipment List Ten Standards	
MFOP	Maintenance Free Operating Period	
MIMS	Maintenance Information Management System	
MMS	Maintenance Management System 1 ent Preview	
MRO	Maintenance Repair and Overhaul	
MS	Support Equipment [Matériel de Soutien]	2-20
NSI	Industrial Support Level [Niveau de Soutien Industriel]	
NSO	Operational Support Level [Niveau de Soutien Opérationnel]	
NTI	Maintenance Level [Niveau Technique d'Intervention]	
OAM	Original Aircraft Manufacturer	
OEM	Original Equipment Manufacturer	
OODA	Observe, Orient, Decide, Act	
ORA	Operational Risk Assessment Operational Readiness Assessment	
OSA	Open System Architecture	
PEDS	Prognostic Enhancements to Diagnostic Systems	
PHM	Prognostic Health Management	
PMA	Part Manufacturer Approval (non-OEM parts but approved by the certification authorities)	

Table 2 — Acronyms (*3 of 3*)

Acronym	Explanation
RCM	Reliability Centred Maintenance
RUL	Remaining Useful Life
SB	Service Bulletin
SCADA	Supervisory Control and Data Acquisition
SIMAD	Integrated structure for maintenance in operational condition of Defence Ministry aeronautical equipment [Structure Intégrée du Maintien en conditions opérationnelles des matériels Aéronautiques du ministère de la Défense]
SIMP	Intelligent Predictive Maintenance System [Système Intelligent de Maintenance Prévisionnelle]
SSES	Health Monitoring System [Système de Surveillance de l'État de Santé]
TRL	Technology Readiness Level
WO	Work Order

4 Information on which this document is based

4.1 Overview of maintenance

4.1.1 Content of the health card

The health card contains the following information (at least):

- a) for each aircraft (or more generally system):
 - 1) the aircraft breakdown structure (applied configuration): list of aircraft parts with their serial numbers,
 - 2) record of overall events (hard landing for example);
- b) for each item (aircraft structure, equipment or component):
 - 1) the condition of the service life counters,
 - 2) record of hardware and software configurations,
 - 3) installation record (on which aircraft the item was installed),
 - 4) record of technical events such as troubleshooting or fault records from the HUMS,
 - 5) maintenance record (the mandatory deadlines can be deduced from this record, along with the condition of the counters and the manufacturer's maintenance obligations).

EN 9722:2023 (E):2023

4.1.2 Health card value chain

4.1.2.1 General

Numerous parties are involved in managing the health card, whether for its use or its value enhancement.

4.1.2.2 The uses of the health card

The uses U of the health card are given below:

- U1: The health card offers the traceability underpinning the aircraft's airworthiness (CAMO).
- U2: The heath card provides information specific to a system (designated by its serial number) and needed for scheduling its maintenance.
- U3: The health card provides data for lessons learned for the stakeholders (users, designer, etc.).

Uses U1 and U3 can be seen in the architecture presented in Annex A - View of enterprise architecture of the non-supply chain support organization. Only use U2 is detailed below.

4.1.2.3 Architecture of the maintenance scheduling value (U2)

Management of the health card participates in control of the use plan through control of the maintenance plan.

Figure 1 describes the construction of the maintenance plan, the value of which will be enhanced to allow the use. This view is not truly representative as the process from health card to use is a continuous loop at all stages:

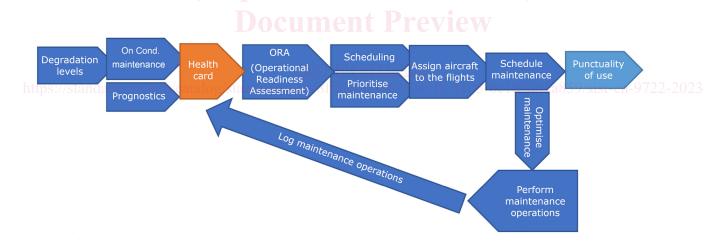


Figure 1 — Architecture of maintenance value enhancement

4.1.3 Use of the health card

4.1.3.1 **General**

The health card is of use during the operational and maintenance phases of a system, but the "upstream" phases can also benefit from the information it contains, i.e. the level of degradation of the system and its components.

Consequently, an architecture interconnecting the maintenance data in the health card with operational and industrial data should be adopted; this is described in Figure 2.

The operational data shall be distinguished from the industrial data:

- the operational data are technical data recorded by the system in operation, along with the environmental data;
- the industrial data are technical design, manufacturing and maintenance data.

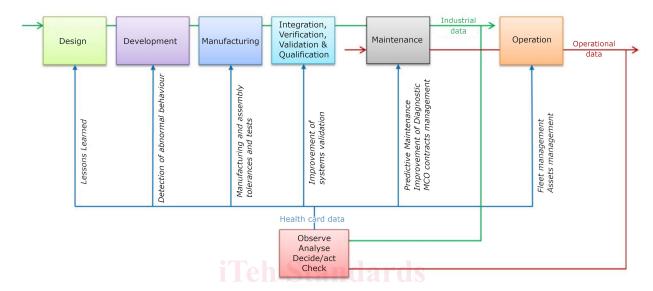


Figure 2 — Interconnection of the various phases in the lifetime of the system

The health card can be used to optimize the cost of ownership of the equipment concerned, whether to optimize its use or to optimize the corresponding maintenance operations. In the longer term, the lessons learned can also help optimize design and manufacturing.

The health condition of an equipment item can be obtained in different ways:

- direct measurement by sensors on the equipment;
- indirect measurement based on direct measurement by means outside the equipment (inspection);
- estimation by means of a model, a digital twin for example, supplied with direct measurements and readjusted by means of indirect measurements.

Knowledge of the configuration is often essential when associating measurements with an equipment item.

NOTE The digital twin represents the behaviour and configuration of a real object using operating data collected in real time. Historically, the digital twin appeared with video games: the driver of a car saw a representation of the car's digital twin at the top-right. As this was a game, the player did not have any proprioceptive information (knowing where one's body is in space). The digital twin provides the player with information: skids, jolts, etc. that the player actually feels. With regard to maintenance, the digital twin enables a remote expert to find out about the degradation condition of the actual object. In principle, the digital twin is based on a representation model reflecting what the human would observe if in direct contact.

4.1.3.2 Design phase

Analysis of the health card, and more precisely evolution of the degradation of the system and its components, may make it possible to steer the design of new products (for example improve the reliability of certain components which degraded too rapidly in the past), through improved knowledge of use of the products. Study of the health cards can thus make it possible to set targets such as reliability, testability, etc. for new products.

4.1.3.3 Development/manufacturing phase

Monitoring the health condition as of the prototyping phase (or on the first production runs or during flight testing) is a means of verifying that during the first hours of operation of a new product, the rate of degradation is normal. If degradation is too fast, this can indicate a design or manufacturing problem. Very early in the life cycle, this can thus generate corrective solutions and measures.

One example is the first Concorde, which was fitted out with a host of sensors to verify the correct working of the various systems.

4.1.3.4 Integration, Verification, Validation and Qualification phase (IVVQ)

Monitoring the health condition of the system and its components during the IVVQ phases can be used to enhance the validation process (extremely binary, i.e. OK or NOK) for the functions and performance of the products, by also focusing on their remaining useful lifetime (or level of degradation). It would appear legitimate for any equipment item delivered to the customers to be at its full remaining useful lifetime and the industrial contractor shall therefore ensure that this is the case.

Study of the health card can also explain certain performance non-conformities during the validation phase, which may be caused by the degradation of certain mechanical components for example.

4.1.3.5 Maintenance phase

The health card will of course be most valuable for maintenance activities. Using the health card can help:

- to improve the diagnostic by not simply using the result of built-in tests (indicating whether or not the equipment is operational at a given moment), but also by estimating the level of degradation of replaceable items;
- to replace scheduled preventive maintenance (based on presumed wear) by predictive maintenance based on actual degradation;
- to reduce corrective maintenance (random and unpredictable), replacing it with predictive maintenance right before failure of the equipment. This helps optimize operational availability (by avoiding failures during missions) and/or reduce support costs through improved scheduling of maintenance tasks;
- to evaluate and predict the workload of the maintenance crews according to the health condition of the fleet. Optimization could even go as far as grouping work on products with a similar remaining useful life [optimization of predicted preventive maintenance steps by means of RUL (Remaining Useful Life) calculations];
- to optimize the predictive models for supply of replacement equipment (which is profitable for forward planning of the logistical supply chain);