# INTERNATIONAL STANDARD

ISO 8364

Fifth edition 2017-12

# Alpine skis and bindings — Binding mounting area — Requirements and test methods

Skis et fixations de skis alpins — Zone de montage de la fixation — Exigences de tenue et méthodes d'essai

### iTeh Standards (https://standards.iteh.ai) Document Preview

ISO 8364:2017

https://standards.iteh.ai/catalog/standards/iso/7b3054c2-765e-4e15-bcdd-85b82a4024t7/iso-8364-2017



## iTeh Standards (https://standards.iteh.ai) Document Preview

ISO 8364:2017

https://standards.iteh.ai/catalog/standards/iso/7b3054c2-765e-4e15-bcdd-85b82a4024f7/iso-8364-2017



#### COPYRIGHT PROTECTED DOCUMENT

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Ch. de Blandonnet 8 • CP 401 CH-1214 Vernier, Geneva, Switzerland Tel. +41 22 749 01 11 Fax +41 22 749 09 47 copyright@iso.org www.iso.org

Con	tents	Page
Forewordi		iv
1	Scope	1
2	Normative references	1
3	Terms and definitions	1
4	Specifications of free space area $(l_z)$ .  4.1 Length of free space area $(l_z)$ .  4.2 Width of the free space area $(b_z)$ .	2
5	Geometrical requirements of free space area  5.1 Longitudinal profile of the ski surface within the free space area  5.2 Transverse profile of the ski surface within the free space area	3
6	Specifications of binding mounting area  6.1 Length of binding mounting area ( <i>l</i> <sub>b</sub> )  6.2 Width of binding mounting area  6.3 Minimum thickness of binding mounting area	4 4
7	Strength requirements of binding mounting area  7.1 Screw retention strength $(F_r)$ 7.2 Stripping resistance $(F_s)$	5
8	Specifications of the binding 8.1 General 8.2 Centre-to-centre distances for binding mounting screws 8.2.1 Maximum centre-to-centre distance 8.2.2 Minimum centre-to-centre distance 8.3 Penetration depth of binding screws	5 5 
9	Side walls	
<b>10</b> ps://sta	Marking ISO 8364-2017  10.1 Marking of the mounting point 10.2 Marking of the ski properties	<b>6</b>
11	Apparatus	6
12	Test screws	8
13	Test methods 13.1 Sampling and conditioning 13.2 General requirements 13.3 Retention strength test 13.3.1 Mounting of the attachment plate 13.3.2 Positioning of the pull-out tests within the binding mounting area 13.3.3 Load application	
	13.4 Stripping resistance test	
14	Test report	
Annex	x A (informative) Synoptic tables	13

#### **Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see <a href="www.iso.org/directives">www.iso.org/directives</a>).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see <a href="https://www.iso.org/patents">www.iso.org/patents</a>).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: <a href="https://www.iso.org/iso/foreword.html">www.iso.org/iso/foreword.html</a>.

This document was prepared by Technical Committee ISO/TC 83, Sports and other recreational facilities and equipment, Subcommittee SC 04, Snowsports equipment.

This fifth edition cancels and replaces the fourth edition (ISO 8364:2007), which has been technically revised. ISO 8364:2017

https://standards.iteh.ai/catalog/standards/iso/7b3054c2-765e-4e15-bcdd-85b82a4024f7/iso-8364-2017

## Alpine skis and bindings — Binding mounting area — Requirements and test methods

#### 1 Scope

This document specifies requirements and test methods for the binding mounting area and free space area, ski bindings and retention devices of alpine skis, in order to optimize the compatibility of the functional unit "ski binding — retention device — boot".

It contains data for the manufacturer of alpine skis, bindings and retention devices, concerning dimensions, tests and other specifications for the binding mounting area.

#### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4287, Geometrical Product Specifications (GPS) — Surface texture: Profile method — Terms, definitions and surface texture parameters

ISO 5355, Alpine ski-boots — Requirements and test methods

ISO 6004, Alpine skis — Ski binding screws — Requirements

ISO 6289, Skis — Vocabulary

ISO 6506 (all parts), Metallic materials — Brinell hardness test

ISO 10045, Alpine skis — Binding mounting area — Requirements for test screws 2417/80-8364-2017

#### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 6289 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <a href="http://www.electropedia.org/">http://www.electropedia.org/</a>
- ISO Online browsing platform: available at <a href="https://www.iso.org/obp">https://www.iso.org/obp</a>

#### 3.1

#### mounting point

location on the ski that indicates the position of the boot along the length of the ski for the purpose of mounting the binding, and which corresponds to the boot sole mark established by ISO 5355 for alpine ski-boots

#### 3.2

#### free space area

area forward and backward from the mounting point, fulfilling minimum flatness requirements in accordance with  $\underline{\text{Clause 5}}$ 


Note 1 to entry: See Figure 1.

#### 3.3

#### binding mounting area

area forward and backward from the mounting point, fulfilling minimum strength requirements in accordance with  $\underline{\text{Clause 7}}$ 

Note 1 to entry: See Figure 1.

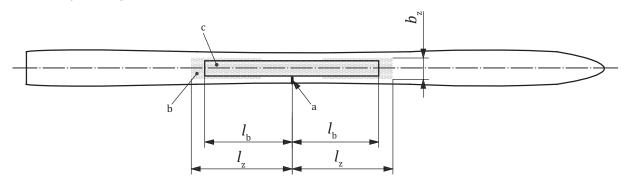

#### Key

- *l*<sub>b</sub> length of binding mounting area
- $l_{\rm z}$  length of free space area
- $b_{\rm z}$  width of the free space area
- a Mounting point.
- b Free space area.
- c Binding mounting area (width in accordance with <u>6.2</u>).

iTeh Standards

Figure 1 — Free space and binding mounting areas

#### Document Preview

#### Specifications of free space area **ISO** 8364201

https://standards.iteh.ai/catalog/standards/iso/7b3054c2-765e-4e15-bcdd-85b82a4024f7/iso-8364-2017

#### 4.1 Length of free space area $(l_z)$

The length of the free space area forward and backward from the mounting point shall be according to the values given in Table 1.

Group

Length of free space area forward and backward from the mounting point

mm

1 300
2 270
3 210
4 190

Table 1 — Length of free space area

#### 4.2 Width of the free space area $(b_z)$

The minimum width of the free space area shall be as follows.

- For Groups 1, 2 and 3:
  - 48 mm within an area 100 mm forward and 100 mm backward from the mounting point;