
8 [[]HJb]`WV] b]`hY`Y_ca i b]_UW`g_]`g]ghYa `fZUnU&ZL`E`NbcHfU`dUgcj bc`_fa]`Yb`Y`
cXXU`Yb]` `dfY_cX]fb]_cj `fHfUbg_cXYf`Yj`L]b`df]`U] cX]b]_cj ` \]fchg]j]`_UbU]`nU
]nVc`´yUb]`dc`bc\]fchg]b]`fØ: FŁ[cj cfb]`dfca Yhif] GA `\$, `* \$zfUn]]WU* `'\$`%ž]nXUU
% - +Ł

Digital cellular telecommunications system (Phase 2+) (GSM); In-band control of remote transcoders and rate adaptors for Enhanced Full Rate (EFR) and full rate traffic channels (GSM 08.60 version 6.0.1 Release 1997)

ITeH STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 737 V6.0.1:2003](https://standards.iteh.ai/catalog/standards/sist/62e57973-f498-4b94-a508-17c19549c817/sist-en-300-737-v6-0-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/62e57973-f498-4b94-a508-17c19549c817/sist-en-300-737-v6-0-1-2003>

Ta slovenski standard je istoveten z: EN 300 737 Version 6.0.1

ICS:

33.070.50	Globalni sistem za mobilno telekomunikacijo (GSM)	Global System for Mobile Communication (GSM)
-----------	---	--

SIST EN 300 737 V6.0.1:2003

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 737 V6.0.1:2003](https://standards.iteh.ai/catalog/standards/sist/62e57973-f498-4b94-a508-17c19549c817/sist-en-300-737-v6-0-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/62e57973-f498-4b94-a508-17c19549c817/sist-en-300-737-v6-0-1-2003>

EN 300 737 V6.0.1 (1999-09)

European Standard (Telecommunications series)

**Digital cellular telecommunications system (Phase 2+);
In-band control of remote transcoders and rate adaptors for
Enhanced Full Rate (EFR) and full rate traffic channels
(GSM 08.60 version 6.0.1 Release 1997)**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

GSM®
GLOBAL SYSTEM FOR
MOBILE COMMUNICATIONS

[SIST EN 300 737 V6.0.1:2003](https://standards.iteh.ai/catalog/standards/sist/62e57973-f498-4b94-a508-17c19549c817/sist-en-300-737-v6-0-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/62e57973-f498-4b94-a508-17c19549c817/sist-en-300-737-v6-0-1-2003>



Reference

DEN/SMG-020860Q6 (6to0300o.PDF)

Keywords

Digital cellular telecommunications system,
Global System for Mobile communications (GSM)**ETSI**

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C

Association à but non lucratif enregistrée à la
Sous-Prefecture de Grasse (06) N° 7803/88

<https://standards.etsi.org/standards-search/300-737-v6-0-1-2003>
17c19549c817/sist-en-300-737-v6-0-1-2003

Internet

secretariat@etsi.frIndividual copies of this ETSI deliverable
can be downloaded from<http://www.etsi.org>If you find errors in the present document, send your
comment to: editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1999.
All rights reserved.

Contents

Intellectual Property Rights.....	5
Foreword	5
1 Scope.....	6
1.1 References.....	6
1.2 Abbreviations.....	7
2 General Approach	7
3 Frame Structure.....	10
3.1 Speech Frames	10
3.2 O&M Frames	11
3.3 Data Frames	12
3.3.1 Data Frame (for Synchronisation).....	12
3.3.2 Extended data frame (E-TRAU : data transport).....	13
3.4 Idle Speech Frames.....	14
3.5 Coding	14
3.5.1 Coding of Speech Frames.....	15
3.5.2 Coding of O&M Frames.....	17
3.5.3 Coding of Data Frames.....	17
3.5.4 Coding of Extended Data Frames.....	17
3.5.5 Coding of Idle Speech Frames	18
3.6 Order of Bit Transmission	18
4 Procedures.....	18
4.1 Remote Control of Transcoders and Rate Adaptors.....	18
4.2 Resource Allocation.....	18
4.3 Resource Release	19
4.4 In Call Modification.....	19
4.5 Transfer of Idle Frames.....	20
4.5.1 In Full rate data case:	20
4.5.2 In Full rate speech case:	20
4.5.3 In Enhanced Full rate speech case:.....	20
4.6 Procedures for Speech Frames.....	20
4.6.1 Time Alignment of Speech Frames	20
4.6.1.1 Initial Time Alignment State	20
4.6.1.2 The Static Time Alignment State.....	21
4.6.1.3 Initiation at Resource Allocation	23
4.6.1.4 Time Alignment During Handover	23
4.6.1.4.1 BSS External Handover	23
4.6.1.4.2 BSS Internal Handover	23
4.6.2 Procedures for Discontinuous Transmission (DTX)	23
4.6.2.1 DTX procedures in the uplink direction	23
4.6.2.2 DTX procedures in the downlink direction	23
4.7 Procedures for Data Frames.....	24
4.7.1 9.6 and 4.8 kbit/s channel coding.....	24
4.7.1.1 The RAA Function	24
4.7.1.2 The RA1/RA1' Function	25
4.7.1.3 The RA2 Function	25
4.7.1.4 Procedures for 8 kbit/s intermediate rate adaption rate.....	25
4.7.1.5 Procedures for 16 kbit/s intermediate rate adaption rate.....	25
4.7.1.6 Support of Non-Transparent Bearer Applications	25
4.7.2 14.5 kbit/s channel coding.....	26
4.7.2.1 The RAA' Function	26
4.7.2.2 The RA1'/RAA' Function.....	26
4.7.2.3 The RA2 Function	26
4.8 Frame Synchronization	26
4.8.1 Search for Frame Synchronization	26

4.8.2	Frame Synchronization After Performing Downlink Timing Adjustments	26
4.8.3	Frame Synchronization Monitoring and Recovery	27
4.9	Correction/detection of bit errors on the terrestrial circuits	28
4.9.1	Error Detection on the Control Bits	28
4.9.1.1	General Procedure	28
4.9.1.2	Speech Frames	28
4.9.2	Handling of frames received with errors	28
4.9.2.1	In case of Full Rate:	28
4.9.2.2	In case of Enhanced Full rate:	28
4.10	Procedures for Operation & Maintenance	29
4.10.1	Transfer of O&M Information Between the TRAU and the BSC	29
4.10.2	Procedures in the TRAU	29
4.10.3	Procedures in the BSC	29
4.10.3.1	Use of O&M Frames	29
4.10.4	Procedures in the BTS	30
Annex A (informative): Change Request History		31
History		32

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 300 737 V6.0.1:2003](https://standards.iteh.ai/catalog/standards/sist/62e57973-f498-4b94-a508-17c19549c817/sist-en-300-737-v6-0-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/62e57973-f498-4b94-a508-17c19549c817/sist-en-300-737-v6-0-1-2003>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available **free of charge** from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by the Special Mobile Group (SMG).

The present document specifies the inband control of remote transcoders and rate adaptors for full rate speech, Enhanced Full rate speech and full rate data within the Digital cellular telecommunications system (Phase 2+).

The specification from which the present document has been derived was originally based on CEPT documentation, hence the presentation of the present document may not be entirely in accordance with the ETSI/PNE Rules.

The contents of the present document is subject to continuing work within SMG and may change following formal SMG approval. Should SMG modify the contents of the present document it will be re-released with an identifying change of release date and an increase in version number as follows:

Version 6.x.y

where:

- 6 indicates Release 1997 of GSM Phase 2+
- x the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- y the third digit is incremented when editorial only changes have been incorporated in the specification.

Proposed national transposition dates

Date of adoption of this EN:	3 September 1999
Date of latest announcement of this EN (doa):	31 December 1999
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	30 June 2000
Date of withdrawal of any conflicting National Standard (dow):	30 June 2000

1 Scope

When 64 kbit/s traffic channels are used on the Abis interface, the speech shall be coded according to CCITT Recommendation G.711 and the data rate adaptation shall be as specified in GSM 04.21 and GSM 08.20.

In the case where 16 kbit/s traffic channels are used for full rate speech or enhanced full rate speech or full rate data service, then the present document shall apply for frame structure and for control of remote transcoders and additional rate adaptors.

The use and general aspects of the Abis interface are given in GSM 08.51.

NOTE: The present document should be considered together with the GSM 06 series of specifications, GSM 04.21 (Rate Adaptation on the MS-BSS Interface) and GSM 08.20 (Rate Adaptation on the BS/MS Interface).

1.1 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS standard (also be taken to refer to later versions published as an EN with the same number).
- For this Release 1997 document, references to GSM documents are for Release 1997 versions (version 6.x.y).

- <https://standards.iteh.ai/catalog/standards/sist/62e57973-498-4b94-a508-17c19549c817/sist-en-300-737-v6-0-1-2003>
- [1] GSM 01.04: "Digital cellular telecommunications system (Phase 2+); Abbreviations and acronyms".
- [2] GSM 04.06: "Digital cellular telecommunications system (Phase 2+); Mobile Station - Base Station System (MS - BSS) interface; Data Link (DL) layer specification".
- [3] GSM 04.21: "Digital cellular telecommunications system (Phase 2+); Rate adaption on the Mobile Station - Base Station System (MS - BSS) interface".
- [4] GSM 06.01: "Digital cellular telecommunications system (Phase 2+); Full rate speech; Processing functions".
- [5] GSM 06.10: "Digital cellular telecommunications system (Phase 2+); Full rate speech; Transcoding".
- [6] GSM 06.11: "Digital cellular telecommunications system (Phase 2+); Full rate speech; Substitution and muting of lost frames for full rate speech channels".
- [7] GSM 06.12: "Digital cellular telecommunications system (Phase 2+); Full rate speech; Comfort noise aspect for full rate speech traffic channels".
- [8] GSM 06.31: "Digital cellular telecommunications system (Phase 2+); Full rate speech; Discontinuous Transmission (DTX) for full rate speech traffic channels".
- [9] GSM 06.32: "Digital cellular telecommunications system (Phase 2+); Voice Activity Detector (VAD)".
- [10] GSM 08.20: "Digital cellular telecommunications system (Phase 2+); Rate adaption on the Base Station System - Mobile-services Switching Centre (BSS - MSC) interface".

- [11] GSM 08.51: "Digital cellular telecommunications system (Phase 2+); Base Station Controller - Base Transceiver Station (BSC - BTS) interface; General aspects".
- [12] GSM 08.54: "Digital cellular telecommunications system (Phase 2+); Base Station Controller - Base Transceiver Station (BSC - BTS) interface; Layer 1 structure of physical circuits".
- [13] GSM 08.58: "Digital cellular telecommunications system (Phase 2+); Base Station Controller - Base Transceiver Station (BSC - BTS) interface; Layer 3 specification".
- [14] GSM 12.21: "Digital cellular telecommunications system (Phase 2+); Network Management (NM) procedures and message on the A-bis interface".
- [15] CCITT Recommendation G.711: "Pulse code modulation (PCM) of voice frequencies".
- [16] CCITT Recommendation I.460: "Multiplexing, rate adaption and support of existing interfaces".
- [17] CCITT Recommendation V.110: "Support of data terminal equipments (DTEs) with V-Series interfaces by an integrated services digital network".
- [18] GSM 06.51: "Digital cellular telecommunications system (Phase 2+); Enhanced Full rate speech processing functions".
- [19] GSM 06.60: "Digital cellular telecommunications system (Phase 2+); Enhanced Full rate speech transcoding".
- [20] GSM 06.61: "Digital cellular telecommunications system (Phase 2+); Substitution and muting of lost frames for Enhanced Full rate speech channels".
- [21] GSM 06.62: "Digital cellular telecommunications system (Phase 2+); Comfort noise aspect for Enhanced Full rate speech traffic channels".
- [22] GSM 06.81: "Digital cellular telecommunications system (Phase 2+); Discontinuous Transmission (DTX) for Enhanced Full rate speech traffic channel".
- [23] GSM 06.82: "Digital cellular telecommunications system (Phase 2+); Voice Activity Detection (VAD)".

1.2 Abbreviations

Abbreviations used in the present document are listed in GSM 01.04.

2 General Approach

When the transcoders/rate adaptors are positioned remote to the BTS, the information between the Channel Codec Unit (CCU) and the remote Transcoder/Rate Adaptor Unit (TRAU) is transferred in frames with a fixed length of 320 bits (20 mS). In the present document, these frames are denoted "TRAU frames". Within these frames, both the speech/data and the TRAU associated control signals are transferred.

The Abis interface should be the same if the transcoder is positioned 1) at the MSC site of the BSS or if it is positioned 2) at the BSC site of the BSS. In case 1), the BSC should be considered as transparent for 16 kbit/s channels.

In case of 4,8 and 9,6 kbit/s channel coding when data is adapted to the 320 bit frames, a conversion function is required in addition to the conversion/rate adaption specified in GSM 08.20. This function constitutes the RAA. In case of 14,5 kbit/s channel coding, no RAA rate adaption is required because V.110 framing is not used.

The TRAU is considered a part of the BSC, and the signalling between the BSC and the TRAU (e.g. detection of call release, handover and transfer of O&M information) may be performed by using BSC internal signals. The signalling between the CCU and the TRAU, using TRAU frames as specified in the present document, is mandatory when the Abis interface is applied.

NOTE: If standard 64 kbit/s switching is used in the BSC, multiplexing according to CCITT Recommendation I.460 should apply at both sides of the switch.

In figure 2.1, a possible configuration of the TRAU and the CCU is shown.

The functions inside the TRAU are:

- "Remote Transcoder and Rate Adaptor Control Function" (RTRACF);
- "Remote Speech Handler Function" (RSHF);
- The RAA function in case of 4.8 and 9.6 kbit/s channel coding;
- The RAA' function in case of 14.5 kbit/s channel coding;
- The RA2 function;
- The transcoder function.

The functions inside the CCU are:


- "Transcoder and Rate Adaptor Control Function" (TRACF);
- "Speech Handler Function" (SHF);
- The RAA function in case of 4.8 and 9.6 kbit/s channel coding;
- The RA1/RA1' function in case of 4.8 and 9.6 kbit/s channel coding;
- The RA1'/RAA' function in case of 14.5 kbit/s channel coding;
- The channel codec function.

ITeh STANDARD PREVIEW
(standards.iteh.ai)

The present document will not describe the procedures inside the TRAU and the CCU. The layout in figure 2.1 is only intended as a reference model.

[SIST EN 300 737 V6.0.1:2003](https://standards.iteh.ai/catalog/standards/sist/62e57973-f498-4b94-a508-17c19549c817/sist-en-300-737-v6-0-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/62e57973-f498-4b94-a508-17c19549c817/sist-en-300-737-v6-0-1-2003>

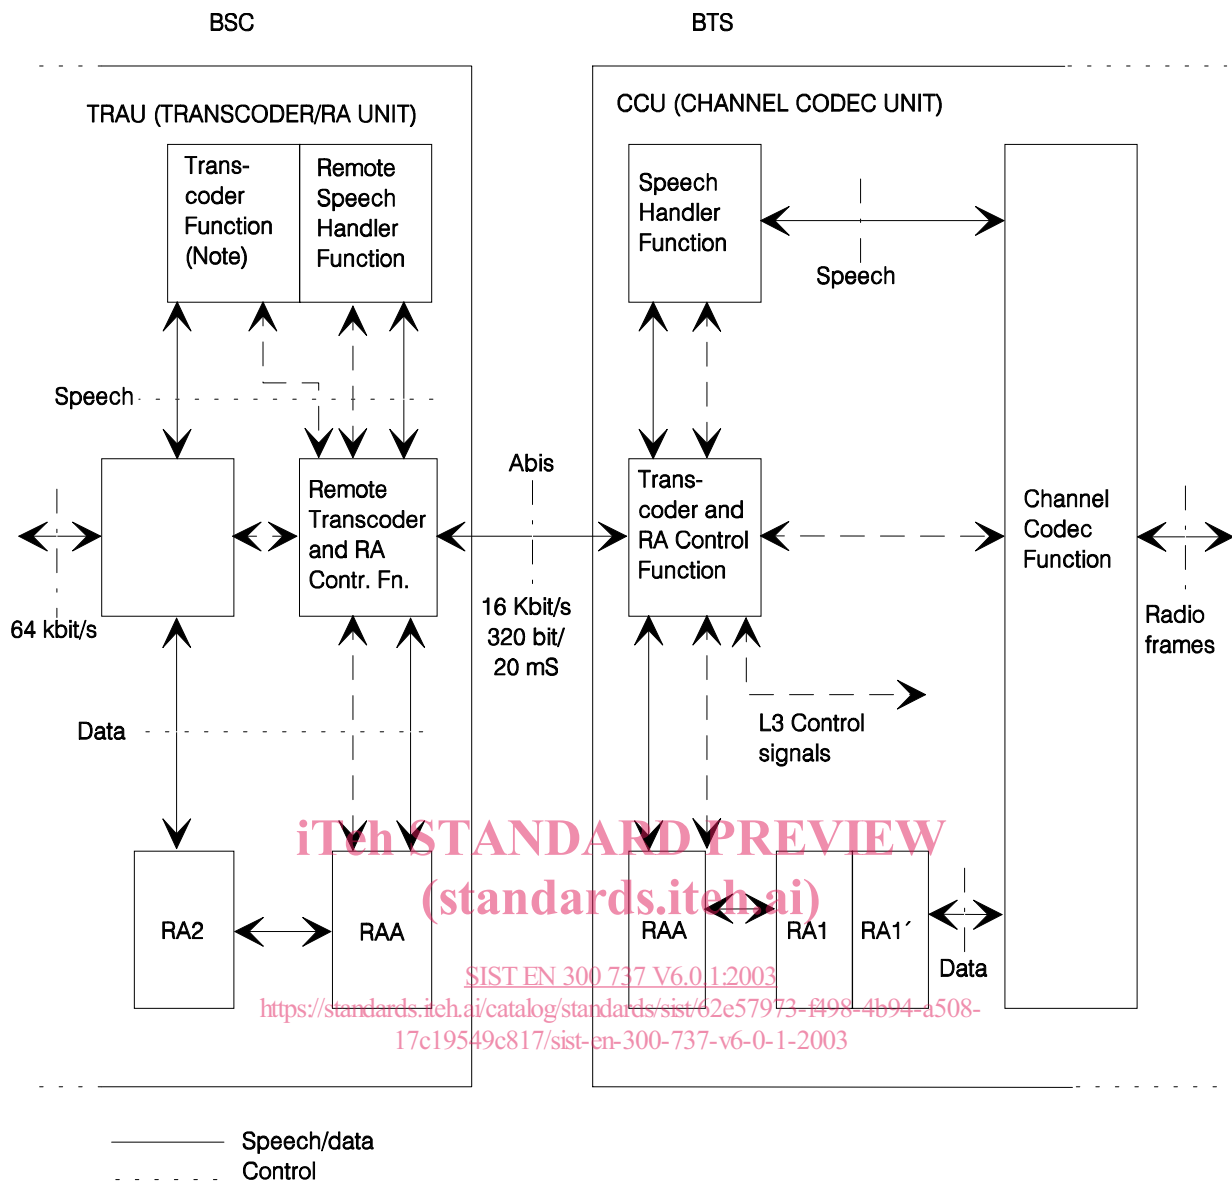

NOTE: This recommendation assumes the DTX handler function to be a part of the Transcoder Function.

Figure 2.1: Functional entities for handling of remote control of remote transcoders and rate adaptors

NOTE: This figure applies only for 4,8 and 9,6 kbit/s channel coding.

3 Frame Structure

3.1 Speech Frames

Octet no.	Bit number							
	1	2	3	4	5	6	7	8
0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	0
2	1	C1	C2	C3	C4	C5	C6	C7
3	C8	C9	C10	C11	C12	C13	C14	C15
4	1	D1	D2	D3	D4	D5	D6	D7
5	D8	D9	D10	D11	D12	D13	D14	D15
6	1	D16	D17	D18	D19	D20	D21	D22
7	D23	D24	D25	D26	D27	D28	D29	D30
8	1	D31	D32	D33	D34	D35	D36	D37
9	D38	D39	D40	D41	D42	D43	D44	D45
10	1	D46	D47	D48	D49	D50	D51	D52
11	D53	D54	D55	D56	D57	D58	D59	D60
12	1	D61	D62	D63	D64	D65	D66	D67
13	D68	D69	D70	D71	D72	D73	D74	D75
14	1	D76	D77	D78	D79	D80	D81	D82
15	D83	D84	D85	D86	D87	D88	D89	D90
16	1	D91	D92	D93	D94	D95	D96	D97
17	D98	D99	D100	D101	D102	D103	D104	D105
18	1	D106	D107	D108	D109	D110	D111	D112
19	D113	D114	D115	D116	D117	D118	D119	D120
20	1	D121	D122	D123	D124	D125	D126	D127
21	D128	D129	D130	D131	D132	D133	D134	D135
22	1	D136	D137	D138	D139	D140	D141	D142
23	D143	D144	D145	D146	D147	D148	D149	D150
24	1	D151	D152	D153	D154	D155	D156	D157
25	D158	D159	D160	D161	D162	D163	D164	D165
26	D166	D167	D168	D169	D170	D171	D172	D173
27	D174	D175	D176	D177	D178	D179	D180	D181
28	1	D181	D182	D183	D184	D185	D186	D187
29	D188	D189	D190	D191	D192	D193	D194	D195
30	1	D196	D197	D198	D199	D200	D201	D202
31	D203	D204	D205	D206	D207	D208	D209	D210
32	1	D211	D212	D213	D214	D215	D216	D217
33	D218	D219	D220	D221	D222	D223	D224	D225
34	1	D226	D227	D228	D229	D230	D231	D232
35	D233	D234	D235	D236	D237	D238	D239	D240
36	1	D241	D242	D243	D244	D245	D246	D247
37	D248	D249	D250	D251	D252	D253	D254	D255
38	1	D256	D257	D258	D259	D260	C16	C17
39	C18	C19	C20	C21	T1	T2	T3	T4