FINAL DRAFT

# INTERNATIONAL STANDARD

ISO/IEC FDIS 29794-1

ISO/IEC JTC 1/SC 37

Secretariat: ANSI

Voting begins on: **2023-12-22** 

Voting terminates on: **2024-02-16** 

Information technology — Biometric sample quality —

Part 1:

**Framework** 

Technologies de l'information — Qualité d'échantillon biométrique —

Partie 1: Cadre

(https://standards.iteh.ai)
Document Preview

ISO/IEC FDIS 29794-1

https://standards.iteh.ai/catalog/standards/sist/12fc88fd-b6b9-4afc-872c-d1b71d0f6051/iso-jec-fdis-29794-

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



# iTeh Standards (https://standards.iteh.ai) Document Preview

ISO/IEC FDIS 29794-1

https://standards.iteh.ai/catalog/standards/sist/12fc88fd-b6b9-4afc-872c-d1b71d0f6051/iso-iec-fdis-29794-1



## **COPYRIGHT PROTECTED DOCUMENT**

© ISO/IEC 2023

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office CP 401 • Ch. de Blandonnet 8 CH-1214 Vernier, Geneva Phone: +41 22 749 01 11 Email: copyright@iso.org Website: www.iso.org

Published in Switzerland

1 Scope 2 Norma 3 Terms 4 Abbrev 5 Confor 6 Biomet 6.1 6.2 6.3 6 6 7 Data in 7.1 7.2 7.3 8 Standards.itel 7.2 7.3 8 Standa 9 Norma 10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (infor	cive references  and definitions  iated terms  mance  ric sample quality criteria  Reference model  Quality aspects: character, fidelity, utility  Use cases of data quality measures  3.1 General  3.2 Real-time quality assessment  3.3 Use in different applications  3.4 Use as a survey statistic  3.5 Accumulation of relevant statistics
2 Norma 3 Terms 4 Abbrev 5 Confor 6 Biomet 6.1 6.2 6.3 6 6 7 Data in 7.1 7 7 7 8 Standards itel 7 7 2 7 3 8 Standa 9 Norma 10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (informatical)	rive references and definitions iated terms mance ric sample quality criteria Reference model Quality aspects: character, fidelity, utility Use cases of data quality measures 3.1 General 3.2 Real-time quality assessment 3.3 Use in different applications 3.4 Use as a survey statistic
2 Norma 3 Terms 4 Abbrev 5 Confor 6 Biomet 6.1 6.2 6.3 6 6 7 Data in 7.1 7 7 7 8 Standards itel 7 7 2 7 3 8 Standa 9 Norma 10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (informatical)	rive references and definitions iated terms mance ric sample quality criteria Reference model Quality aspects: character, fidelity, utility Use cases of data quality measures 3.1 General 3.2 Real-time quality assessment 3.3 Use in different applications 3.4 Use as a survey statistic
3 Terms 4 Abbrev 5 Confor 6 Biomet 6.1 6.2 6.3 6 6 6 7 Data in 7.1 7 7.2 7.3 8 Standa 9 Norma 10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (infor	and definitions iated terms mance ric sample quality criteria Reference model Quality aspects: character, fidelity, utility Use cases of data quality measures .3.1 General .3.2 Real-time quality assessment .3.3 Use in different applications .3.4 Use as a survey statistic
4 Abbreve 5 Confor 6 Biomet 6.1 6.2 6.3 6 6 6 6 7 Data in 7.1 7.2 7.3 8 Standards.itel 7.2 7.3 8 Standa 9 Norma 10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (infor	iated terms  mance  ric sample quality criteria  Reference model  Quality aspects: character, fidelity, utility  Jse cases of data quality measures  3.1 General  3.2 Real-time quality assessment  3.3 Use in different applications  3.4 Use as a survey statistic
5 Confor 6 Biomet 6.1 6.2 6.3 6.3 6.6 6.6 6.6 6.6 6.6 6.6 6.6 6.6	ric sample quality criteria Reference model Quality aspects: character, fidelity, utility Use cases of data quality measures 3.1 General 3.2 Real-time quality assessment 3.3 Use in different applications 3.4 Use as a survey statistic
6 Biomes 6.1 6.2 6.3 6.3 7 Data in 7.1 7.2 7.3 8 Standards itel 7.2 7.3 8 Standa 9 Norma 10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (information)	ric sample quality criteria Reference model Quality aspects: character, fidelity, utility Jse cases of data quality measures .3.1 General .3.2 Real-time quality assessment .3.3 Use in different applications .3.4 Use as a survey statistic
6.1 6.2 6.3 6.3 7 Data in 7.1 7.2 7.3 8 Standa 9 Norma 10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (information)	Reference model Quality aspects: character, fidelity, utility Use cases of data quality measures Use cases of data quality measures Use as a survey statistic
6.2 6.3 6.3 6.6 6.6 6.6 6.6 6.6 7 Data in 7.1 7.2 7.3 8 Standa 9 Norma 10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (information)	Quality aspects: character, fidelity, utility
6.3  6.3  6.6  6.6  6.6  7  Data in 7.1  7.2  7.3  8  Standards itel 7.2  7.3  8  Standa 9  Norma  10  Pairwi 11  Evalua  11.1  11.2  11.3  11.4  11.5  Annex A (information of the content of the conten	Jse cases of data quality measures  .3.1 General  .3.2 Real-time quality assessment  .3.3 Use in different applications  .3.4 Use as a survey statistic
7 Data in 7.1 7.2 7.3 8 Standards itel 7.1 1.1 1.1.2 11.3 11.4 11.5 Annex A (information)	.3.1 General
7 Data in 7.1 7.2 7.3 8 Standards 10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (information)	<ul><li>.3.2 Real-time quality assessment</li><li>.3.3 Use in different applications</li><li>.3.4 Use as a survey statistic</li></ul>
7 Data in 7.1 7.2 7.3 8 Standards.itel 7.3 10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (information of the standards	.3.3 Use in different applications
7 Data in 7.1 7.2 7.3 8 Standards itel 7.1 1.1 1.1.2 11.3 11.4 11.5 Annex A (information)	.3.4 Use as a survey statistic
7 Data in 7.1  7 Total in 7.1  7 Standards itel 7 7.2  7.3  8 Standa  9 Norma  10 Pairwi  11 Evalua  11.1  11.2  11.3  11.4  11.5  Annex A (information of the standards)	
7 Data in 7.1 7.2 7.3 8 Standards itel 7.2 7.3 10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (information of the standards itel 7.2 11.3 11.4 11.5	
7 Data in 7.1 7.2 7.3 8 Standards itel 7.1 1.1 1.1.2 11.3 11.4 11.5 Annex A (information)	3.6 Sample-based reference database improvement
7 Data in 7.1 7.2 7.3 8 Standards itel 7.2 7.3 10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (information of the standards in the stand	.3.7 Quality-based conditional processing
7 Data in 7.1 7.2 7.3 8 Standards.itel 7.3 8 Standa 10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (information of the standards of the	.3.8 Quality-directed fusion
7 Data in 7.1 7.2 7.2 7.3 8 Standards 10 Pairwi 11.2 11.3 11.4 11.5 Annex A (information)	.3.9 Interchange of quality measures by disparate systems
7 Data in 7.1 7.2 7.3 8 Standards itel 7.2 7.3 8 Standa 10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (information of the standards itel 7.2 11.3 11.4 11.5	.3.10 Workload reduction with quality scores
/standards.itel 7.2 7.3  8 Standa  9 Norma  10 Pairwi  11 Evalua 11.1 11.2 11.3 11.4 11.5  Annex A (information)	.3.11 Selection of the best of a series of biometric samples
/standards.itel 77.2 7.3  8 Standa  9 Norma  10 Pairwi  11 Evalua 11.1 11.2 11.3 11.4 11.5  Annex A (information)	terchange format field definition
/standards itel 7.2 7.3  8 Standa  9 Norma  10 Pairwi  11 Evalua 11.1 11.2 11.3 11.4 11.5  Annex A (info	Abstract description
7.2 7.3  8 Standa  9 Norma  10 Pairwi  11 Evalua 11.1 11.2 11.3 11.4 11.5  Annex A (info	.1.1 Overview
7.2 7.3  8 Standa  9 Norma  10 Pairwi  11 Evalua 11.1 11.2 11.3 11.4 11.5  Annex A (info	1.2 Quality assessment algorithm identifier block
7.3  8 Standa  9 Norma  10 Pairwi  11 Evalua  11.1  11.2  11.3  11.4  11.5  Annex A (information)	1.3 Quality measure (quality score or quality component) or error.
8 Standa 9 Norma 10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (info	KML encoding
9 Norma 10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (info	Fagged binary encoding
10 Pairwi 11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (info	rdized exchange of quality assessment algorithm results
11 Evalua 11.1 11.2 11.3 11.4 11.5 Annex A (info	ization
11.1 11.2 11.3 11.4 11.5 <b>Annex A</b> (info	se quality
11.2 11.3 11.4 11.5 <b>Annex A</b> (info	ion
11.3 11.4 11.5 <b>Annex A</b> (info	General
11.4 11.5 <b>Annex A</b> (info	False non-match error versus discard method
11.5 <b>Annex A</b> (info	False match error versus discard method
Annex A (info	DET versus discard method
•	Sample acceptance or discard rate
A D () (	mative) Example of encoding a biometric quality record
	mative) Example of standardized exchange of quality assessment algorithm
	rmative) Procedures for aggregation of utility-based quality scores for
Annex D (info	-based systems

### Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of document should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see <a href="www.iso.org/directives">www.iso.org/directives</a> or <a href="www.iso.org/directives">www.iso.org/directives<

ISO and IEC draw attention to the possibility that the implementation of this document may involve the use of (a) patent(s). ISO and IEC take no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, ISO and IEC had not received notice of (a) patent(s) which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <a href="https://patents.iec.ch">www.iso.org/patents</a> and <a href="https://patents.iec.ch">https://patents.iec.ch</a>. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see <a href="https://www.iso.org/iso/foreword.html">www.iso.org/iso/foreword.html</a>. In the IEC, see <a href="https://www.iso.org/iso/foreword.html">www.iso.org/iso/foreword.html</a>. In the IEC, see <a href="https://www.iso.org/iso/foreword.html">www.iso.org/iso/foreword.html</a>.

This document was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, Subcommittee SC 37, *Biometrics*.

This third edition cancels and replaces the second edition (ISO/IEC 29794-1:2016), which has been technically revised.

The main changes are as follows:

- the definitions of "quality", "quality score", and "utility" have been aligned with those in ISO/IEC 2382-37:2022;
- methods for evaluating the efficacy of quality assessment algorithms have been added;
- ASN.1 encoding as defined in ISO/IEC 39794-1 is supported.

A list of all parts in the ISO/IEC 29794 series can be found on the ISO and IEC websites.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at <a href="https://www.iso.org/members.html">www.iso.org/members.html</a> and <a href="https://www.iso.org/members.html">www.iso.org/members.html</a> and <a href="https://www.iso.org/members.html">www.iso.org/members.html</a> and

## Introduction

Quality measures are useful for several applications in the field of biometrics. While ISO/IEC 19784-1 specifies a structure and gives guidelines for quality score categorization, this document defines and specifies methodologies for objective and quantitative quality score expression, interpretation and interchange.

This document establishes a framework that facilitates the use of biometric sample quality assessment and scoring tools. The tools are intended to encourage innovation and performance improvements in, and interoperability of, biometric systems generally. The ISO/IEC 29794 series presents several biometric sample quality assessment and scoring tools, the use of which is generally optional but can be determined as mandatory by particular application profiles or specific implementations. The ISO/IEC 29794 series is prepared to accommodate additional parts that address the biometric modes specified by the ISO/IEC 19794 series and the ISO/IEC 39794 series, with part numbers and titles aligning appropriately. However, as this document is intended for use by all biometric modes, a mode does not necessarily need a mode-specific part to make use of quality scores.

Several applications can benefit from the use of biometric sample quality measures. An example is the use of real-time quality feedback as part of the biometric capture process to improve the operational efficiency and performance of a biometric system. Other examples include data fusion for which multiple samples or references are available in the comparison process, either from a single or multiple biometric modes, and hardening systems against presentation attacks using or targeting low quality biometric samples. The association of quality measures with biometric samples is an important component of quality measure standardization. Quality fields as specified in <u>Clause 7</u> are included in biometric data interchange formats. If a CBEFF (Common Biometric Exchange Formats Framework) header is present, then CBEFF\_BDB\_quality may additionally be used to express quality measures. Useful analyses can be performed using quality measures along with other data to improve the performance of a biometric system. For example, correlating quality measures to other system metrics can be used to diagnose problems and highlight potential areas of performance improvement.

#### ISO/IEC FDIS 29794-1

https://standards.iteh.ai/catalog/standards/sist/12fc88fd-b6b9-4afc-872c-d1b71d0f6051/iso-iec-fdis-29794-

# iTeh Standards (https://standards.iteh.ai) Document Preview

**ISO/IEC FDIS 29794-1** 

https://standards.iteh.ai/catalog/standards/sist/12fc88fd-b6b9-4afc-872c-d1b71d0f6051/iso-iec-fdis-29794-1

## Information technology — Biometric sample quality —

## Part 1:

## **Framework**

## 1 Scope

This document establishes the following items for any or all biometric sample types as necessary:

- terms and definitions that are useful in the specification and use of quality measures;
- purpose and interpretation of biometric quality scores;
- motivation for developing biometric sample datasets for the purpose of quality score normalization;
- format for exchange of quality assessment algorithm results;
- methods for aggregation of quality scores;
- methods for evaluating the efficiency of quality assessment algorithms.

The following are outside the scope of this document:

- specification of minimum requirements for sample, module, or system quality scores;
- standardization of quality assessment algorithms;
- assessment of utility of biometric samples or references for human examiners.

## 2 an Normative references rds/sist/12fc88fd-b6b9-4afc-872c-d1b71d0f6051/iso-iec-fdis-29794-1

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 39794-1, Information technology — Extensible biometric data interchange formats — Part 1: Framework

ISO/IEC 2382-37, Information technology — Vocabulary — Part 37: Biometrics

ISO/IEC 19785-2, Information technology — Common Biometric Exchange Formats Framework — Part 2: Biometric registration authority

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 2382-37, ISO/IEC 39794-1 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <a href="https://www.iso.org/obp">https://www.iso.org/obp</a>
- IEC Electropedia: available at <a href="https://www.electropedia.org/">https://www.electropedia.org/</a>

### ISO/IEC FDIS 29794-1:2023(E)

#### 3.1

#### acquisition fidelity

fidelity (3.8) of a biometric sample attributed to the acquisition process

#### 3 2

#### biometric character

set of attributes associated with a biometric characteristic that cannot be controlled during the biometric acquisition process

EXAMPLE Scars, number of minutiae, blepharoptosis (droopy eyelid)

[SOURCE: ISO/IEC 2382-37:2022, 37.09.15, modified — Note 1 to entry has been removed.]

#### 3.3

#### biometric utility

degree to which a biometric sample supports biometric recognition *performance* (3.11)

Note 1 to entry: The character of the sample source, the *fidelity* (3.8) of the processed biometric samples and the conformance of the biometric sample presentation contribute to, or similarly detract from, the utility of the biometric sample.

Note 2 to entry: Performance measures such as false match rate, false non-match rate, failure-to-enrol rate, and failure-to-acquire rate are an indication of biometric utility.

[SOURCE: ISO/IEC 2382-37:2022, 37.09.16]

#### 3.4

#### environment

physical surroundings and conditions in which the biometric capture takes place

Note 1 to entry: The conditions include the factors such as lighting and temperature, level of enrolee cooperation, and the skill of the operator, if one is involved in the capture process.

#### 3.5

# false non-match error versus discard characteristic FNM-EDC

method to evaluate the efficacy of *quality assessment algorithms* (3.13) by quantifying how efficiently discarding samples with low *quality scores* (3.16) results in an improved (i.e. reduced) false non-match rate

Note 1 to entry: The false non-match error versus discard characteristic is a graphical presentation of the *performance* (3.11) of quality assessment algorithms, plotting the dependence of the false non-match rate at a fixed comparison decision threshold on the percentage of low-quality reference and probe samples discarded.

#### 3.6

## false match error versus discard characteristic

method to evaluate the efficacy of *quality assessment algorithms* (3.13) by quantifying how efficiently discarding samples with low *quality scores* (3.16) results in an improved (i.e. reduced) false match rate

Note 1 to entry: The false match error versus discard characteristic is a graphical presentation of the *performance* (3.11) of quality assessment algorithms, plotting the dependence of the false match rate at a fixed comparison decision threshold on the percentage of low-quality reference and probe samples discarded.

#### 3.7

#### extraction fidelity

component of the *fidelity* (3.8) of a sample attributed to the biometric feature extraction process

#### 3.8

#### fidelity

degree to which a biometric sample is representative of its source biometric characteristic

Note 1 to entry: The fidelity of a sample comprises components attributable to one or more of the processing steps: acquisition, extraction, signal processing.

#### 3.9

#### interpretation

process of analysing a *quality score* (3.16) along with other data in order to give that score contextual, relative meaning

#### 3.10

### native quality measure

output of a *quality assessment algorithm* (3.13) without constraints on data format and/or value range

#### 3.11

#### performance

assessment of false match rate, false non-match rate, failure-to-enrol rate, failure-to-acquire rate, processing time or throughput rates of a biometric system

#### 3.12

#### quality

degree to which a biometric sample meets the specified requirements for its targeted application

[SOURCE: ISO/IEC 2382-37:2022, 37.09.14] standards

#### 3.13

#### quality assessment algorithm

quality algorithm

algorithm to calculate a quality measure (3.15)

Note 1 to entry: The ISO/IEC 19785 series uses the term "quality algorithm".

#### 3.14

#### 180/1EC FD18 29 /94-1

## quality component alog/standards/sist/12fc88fd-b6b9-4afc-872c-d1b71d0f6051/iso-iec-fdis-29794-1

measurement on the biometric sample that may contribute to the computation of a unified *quality score* (3.16)

Note 1 to entry: Features expressing quality components are defined in the modality-specific parts of the ISO/IEC 29794 series.

#### 3.15

#### quality measure

quality score (3.16) or quality component (3.14)

#### 3.16

#### quality score

quantitative value of the fitness of a biometric sample to accomplish or fulfil the comparison decision

[SOURCE: ISO/IEC 2382-37:2022, 37.09.13]

#### 3.17

#### quality score normalization

rescaling of quality scores (3.16) to improve consistency in scale and interpretation (3.9)

### ISO/IEC FDIS 29794-1:2023(E)

#### 3.18

## quality score normalization dataset

**QSND** 

dataset of biometric samples annotated with *quality scores* (3.16) for use in *quality score normalization* (3.17)

Note 1 to entry: Target quality scores may be assigned based on *performance* (3.11) outcomes using the sample in question or may be based on quality factors recorded in the acquisition of the dataset.

#### 3.19

## quality score percentile rank

**QSPR** 

percentile rank of *quality scores* (3.16) of biometric samples in an identified control dataset that are less than the specified quality score

Note 1 to entry: See QSND (3.18).

#### 3.20

#### raw quality score

*quality score* (3.16) that has not been *interpreted* (3.9), either by the creator or recipient of the score, and alone potentially does not intrinsically provide contextual information

#### 4 Abbreviated terms

BDB biometric data block in the standard series and series and series are series.

CBEFF common biometric exchange formats framework (ISO/IEC 19785)

CDF cumulative distribution function

DET detection error trade-off

FERET facial image database developed by the U.S. government in the 1990s

https://standards.iteh.ai/catalog/standards/sist/12fc88fd-b6b9-4afc-872c-d1b71d0f6051/iso-jec-fdis-29794

FMR false match rate

FNMR false non-match rate

QAID quality assessment algorithm identifier

QSND quality score normalization dataset

QSPR quality score percentile rank

QVID quality assessment algorithm vendor identifier

### 5 Conformance

A biometric sample quality block shall be considered conformant to this document if its structure and data values conform to the formatting requirements of <u>Clause 7</u>.

The semantic conformance testing will be handled in the modality-specific parts of the ISO/IEC 29794 series, where, for example, conformance test sets (a set of biometric samples representing the entire variety of quality from poor to good) and associated quality scores to be obtained with the reference implementation are given.

## 6 Biometric sample quality criteria

#### 6.1 Reference model

In biometrics, the term "quality" is used to describe several different aspects of a biometric sample that contribute to the overall performance of a biometric system. For the purposes of standardization, this document defines terms, definitions, and a reference model for distinguishing among the different aspects of quality, illustrated in <a href="Figure 1">Figure 1</a>. The quality of a biometric sample depends on character and fidelity. <a href="Figure 2">Figure 2</a> illustrates the relationship between quality (character, fidelity and utility) and system performance. The utility of a biometric sample reflects the impact of this sample on biometric recognition performance.

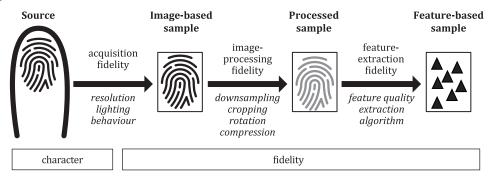


Figure 1 — Quality reference model illustration

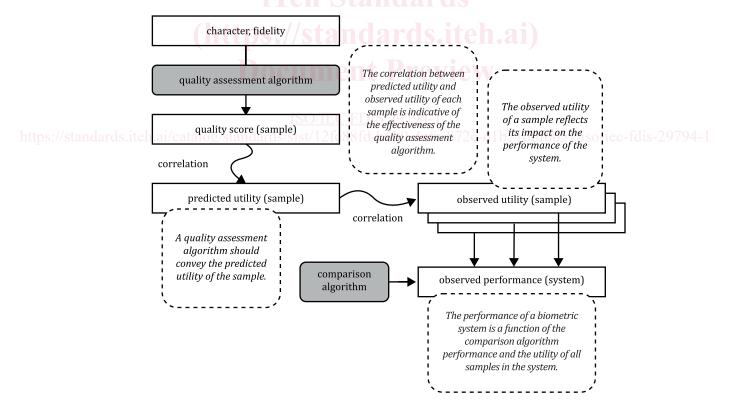


Figure 2 — Relationship between quality and system performance