Draft ISO/FDIS 18274:2022(E)

ISO/TC 44/SC 3

Secretariat: ANSI

Date: 2022-12-16

Welding consumables — Solid wire electrodes, solid strip electrodes, solid wires and solid rods for fusion welding of nickel and nickel alloys — Classification

<u>Produits consommables pour le soudage — Fils-électrodes pleins, feuillards pleins, fils pleins et baguettes pleines pour le soudage par fusion du nickel et des alliages de nickel — Classification</u>

iTeh STANDARD PREVIEW (standards.iteh.ai)

 $https://standards.iteh.ai/cata \underline{F/surlS_{to}Stage} 4e-afb8-f89867c49cd0/iso-face to the first of the first$

© ISO 2022

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office CP 401 • Ch. de Blandonnet 8 CH-1214 Vernier, Geneva Phone: + 41 22 749 01 11

Fax: +41 22 749 09 47

EmailE-mail: copyright@iso.org

Website: www.iso.org

Published in Switzerland

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 18274

Contents

Forew	ordiv
Introd	ordv
1	Scope1
2	Normative references
3	Terms and definitions1
4	Classification
5	Symbols and requirements1
5.1	Symbols for the product form
5.2	Symbol for the chemical composition1
6	Chemical analysis
7	Mechanical properties of the weld metal
8	Rounding procedure
9	Retests
10	Technical delivery conditions12
11	Designation
Annex	A (informative) System for designation of welding consumables
Annex	B (informative) Description and uses of welding consumables
Annex	C (informative) Corresponding national classifications and typical weld metal tensile strengths
Biblio	graphy25

ISO 18274

ISO/FDIS 18274:2022(E) Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 44, Welding and allied processes, Subcommittee SC 3, Welding consumables, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 121, Welding and allied processes, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).


This third edition cancels and replaces the second edition (ISO 18274:2010), which has been technically revised.

The main changes are as follows:

- a number of new restricted alloy symbols, commonly used in the USA, were added to Table 1 Table 1 and Table C.1 Table C.1;
- a number of alloy symbols were updated in <u>Table 1 Table 1</u> and <u>Table C.1 Table C.1;</u>
- a new EXAMPLE 4 was added to Clause 11 Clause 11 for a Z classification.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html. Official interpretations of ISO/TC 44 documents, where they exist, are available from this page: https://committee.iso.org/sites/tc44/home/interpretation.html.

Introduction

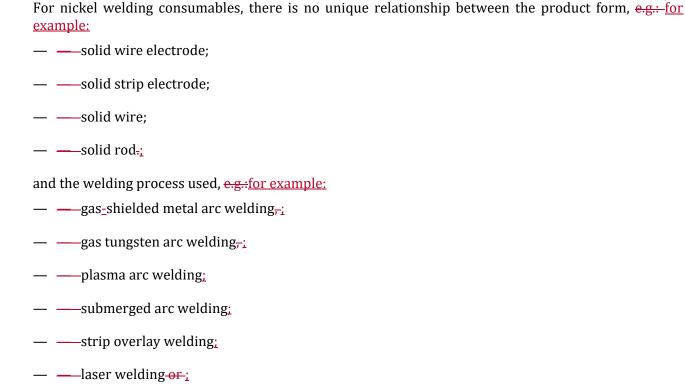

Consequently, solid wire electrodes, solid strip electrodes, solid wires, or solid rods can be classified on the basis of any of these product forms and can be used, as appropriate, for more than one of the abovethese processes (see also Annex BAnnex B).).

The International Organization for Standardization (ISO) draws attention to the fact that it is claimed that compliance with this document may involve the use of a patent.

ISO takes no position concerning the evidence, validity and scope of this patent right.

The holder of this patent right has assured ISO that he/she is willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with ISO. Information may be obtained from the patent database available at www.iso.org/patents.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those in the patent database. ISO shall not be held responsible for identifying any or all such patent rights.

— other welding processes.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 18274

Welding consumables — Solid wire electrodes, solid strip electrodes, solid wires, and solid rods for fusion welding of nickel and nickel alloys — Classification

1 Scope

This document specifies requirements for classification of solid wire electrodes, solid strip electrodes, solid wires, and solid rods for fusion welding of nickel and nickel alloys. The classification of the solid wire electrodes, solid strip electrodes, solid wires, and solid rods is based on their chemical composition. It includes those compositions in which the nickel content exceeds that of any other element.

The principles of this document can be applied to metal powders for cladding, hard facing and additive manufacturing.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 544, Welding consumables — Technical delivery conditions for filler materials and fluxes — Type of product, dimensions, tolerances and markings

ISO 14344, Welding consumables — Procurement of filler materials and fluxes

ISO 80000-<u>-</u>1:2009, Quantities and units — Part 1: General

3 Terms and definitions

No terms and definitions are listed in this document. 8274

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at https://www.iso.org/obp
- IEC Electropedia: available at https://www.electropedia.org/

4 Classification

The symbol for the classification is divided into two parts:

- a) a) the first part indicates the product form, being solid wire electrode, solid strip electrode, solid wire, or solid rod, see 5.15.1;
- b) the second part gives a numerical symbol indicating the chemical composition of the solid wire electrode, solid strip electrode, solid wire, or solid rod, see Table 1 Table 1.

5 Symbols and requirements

5.1 Symbols for the product form

The symbol for the solid wire electrode, solid wire or solid rod shall be "S".

The symbol for the solid strip electrode shall be "B".

NOTE One product form can be used for more than one welding process.

5.2 Symbol for the chemical composition

The initial symbol "Ni" in <u>Table 1</u> identifies the welding consumable as a nickel base alloy. The following four digits indicate the chemical composition of the solid wire electrode, solid strip electrode,

solid wire or solid rod, determined under conditions given in <u>Clause 6-Clause 6-.</u> The first digit is an indicator of the alloy group as follows:

- ____1, significant molybdenum addition without significant chromium addition (nickel-molybdenum alloys);
- 2, no significant alloy addition;
- 4, significant copper addition (nickel-copper alloys);
- 5, significant copper additions with aluminium and titanium for precipitation hardening;
- 6, significant chromium addition, with iron less than 25 % (by mass <u>fraction</u>) (nickel-chromium-iron and nickel-chromium-molybdenum alloys);
- 7, same as 6, but with aluminium and titanium for precipitation hardening;
- 8, significant chromium addition, with iron more than 25 % (by mass <u>fraction</u>) (nickel-iron-chromium alloys);
- —9, an alloy that is precipitation hardenable.

The remaining digits indicate the alloy composition of the welding consumable. The basis of the system of designation is described in <u>Annex Annex A.</u> A description of common uses of each welding consumable alloy is given in <u>Annex B.</u>

NOTE 1 In addition, the chemical symbol can be used.

NOTE 2 Corresponding national classifications are shown in <u>Annex C. Table C.1 Annex C.</u>

ISO 18274

Table 1 — Symbols and chemical composition requirements for solid wire electrodes, solid strip electrodes, solid wires and solid rods

Al					Ch	emical con	ıpositioı	n, % (by -r	nass <u>fract</u>	<u>cion</u>)a			M. W. Ob. of									
Numerical ^b	Chemical	С	Mn	Fe	Si	Cu	Nic	Со	Al	Ti	Cr	Nb ^d	Mo	W	Others ^{e, f}							
Nickel	Tal C			DD I			111 7															
Ni 2061	NiTi3	0,15	1,0	1,0	0,7	0,25	≥ 92,0	_	1,5	2,0 to 3,5	_	_	_	_	P 0,03							
Ni 2061B	(NiTi3)	0,15	1,0	1,0	0,7	0,25	≥ 93,0	_	1,5	2,0 to 3,5	_	_	_	_	P 0,03							
Nickel-copper	// . 1 1 1 1 1 1	1 / 4	ISO	18274	C C1 /	154 0.0	0.00067	10 10/	II.			1										
Ni 4060	NiCu30Mn3Ti	0,15	4,0	2742,5	1,2	28,0 to 32,0	62,0 to 69,0	<u></u>	1,2	1,5 to 3,0	_	0,3	_	_	_							
Ni 4061	NiCu30Mn3Nb	0,15	4,0	2,5	1,25	28,0 to 32,0	≥ 60,0	_	1,0	1,0	_	3,0	_	_	_							
Ni 5504	NiCu25Al3Ti	0,25	1,5	2,0	1,0	≥ 20,0	63,0 to 70,0	_	2,0 to 4,0	0,3 to 1,0	_	_	_	_	P 0,03							
Nickel-chromi	um																					
Ni 6072	NiCr44Ti	0,01 to 0,10	0,20	0,50	0,20	0,50	≥ 52,0	_	_	0,3 to 1,0	42,0 to 46,0	_	_	_	_							
NI 6073	NiCr38AlNbTi	0,03	0,50	1,0	0,30	0,30	≥ 63,0	1,0	0,75 to 1,20	0,25 to 0,75	36,0 to 39,0	0,25 to 1,00	0,50	_	P 0,02 B 0,003 Zr 0,02							
Ni 6076	NiCr20	0,08 to 0,15	1,0	2,00	0,30	0,50	≥ 75,0	_	0,4	0,15 to 0,50	19,0 to 21,0	_	_	_	P 0,03							
Ni 6082	NiCr20Mn3Nb	0,10	2,5 to 3,5	3,0	0,5	0,5	≥ 67,0	_	_	0,7	18,0 to 22,0	2,0 to 3,0	_	_	P 0,03							

All					Ch	emical con	nposition	sition, % (by-mass_fraction) ^a											
Numericalb	Chemical	С	Mn	Fe	Si	Cu	Nic	Со	Al	Ti	Cr	Nb ^d	Мо	W	Others ^{e, f}				
Ni 6699 6699	NiCr29Al Teh S	0,005 to 0,10	0,5	2,5	0,50	0,50	≥ 60	=	1,9 to 3,0	0,60	26,0 to 30,0	0,50	-=	-=	Zr 0,10 N 0,05 S 0,01 B 0,008				
Nickel-chromi	um-iron	stan	dar	ds ite	h ai														
Ni 6002	NiCr21Fe18Mo9	0,05 to 0,15	1,0 ISO	17,0 to 20,0 18274	1,0	0,5	≥ 44,0	0,5 to 2,5	_	_	20,5 to 23,0	_	8,0 to 10,0	0,2 to 1,0	P 0,04 S 0,03				
Ni 6025	NiCr25Fe10AlY	0,15 to 0,25	0,5	8,0 to 11,0	0,5	0,1	≥ 59,0	1,0	1,8 to 2,4	0,1 to 0,2	24,0 to 26,0	_	_	_	Y 0,05 to 0,12 Zr 0,01 to 0,10				
Ni 6030	NiCr30Fe15Mo5W	0,03	1,5	13,0 to 17,0	0,8	1,0 to 2,4	≥ 36,0	5,0	_	_	28,0 to 31,5	0,3 to 1,5	4,0 to 6,0	1,5 to 4,0	P 0,04 S 0,02				
Ni 6043	NiCr30Fe9Nb2	0,04	3,0	7,0 to 12,0	0,5	0,30	≥ 54,0	_	0,50	0,5	28,0 to 31,5	1,0 to 2,5	0,50	_	_				
Ni 6045	NiCr28Fe23Si3	0,05 to 0,12	1,0	21,0 to 25,0	2,5 to 3,0	0,3	≥ 40,0	1,0	0,30	_	26,0 to 29,0	_	_	_	P 0,020 S 0,010				
Ni 6052	NiCr30Fe9	0,04	1,0	7,0 to 11,0	0,5	0,3	≥ 54,0	_	1,1	1,0	28,0 to 31,5	0,10	0,5	_	Al + Ti < 1,5				
Ni 6054	NiCr29Fe9	0,04	1,0	7,0 to 11,0	0,50	0,30	≥ 51,0	0,12	1,10	1,0	28,0 to 31,5	0,5 to 1,0	0,50	_	P 0,02				
Ni 6054B	(NiCr29Fe9)	0,04	1,0	7,0 to 11,0	0,50	0,30	≥ 51,0	0,12	1,10	1,0	28,0 to 31,5	0,5 to 1,0	0,50	_	P 0,02 Al + Ti 1,5 B 0,005 Zr 0,02				

All					Ch	emical con	position	ı , % (by -n	nass <u>frac</u> t	tion)a		NI										
Numericalb	Chemical	С	Mn	Fe	Si	Cu	Nic	Со	Al	Ti	Cr	Nb ^d	Mo	W	Others ^{e, f}							
Ni 6055	NiCr29Fe5Mo4Nb3	0,03	1,0	14,4	0,50	0,30	52,0 to 62,0	0,10	0,50	0,50	28,5 to 31,0	2,1 to 4,0	3,0 to 5,0	_	P 0,02 B 0,003 Zr 0,02							
Ni 6056	NiCr27Fe2Nb2	0,020 to 0,055	2,5 to 3,5	1,0 to 3,0	0,50	0,3	≥ 61,0	0,10	0,60	0,10 to 0,40	26,0 to 28,0	2,0 to 2,8	_	_	P 0,02							
Ni 6062 https	NiCr15Fe8Nb /standards.iteh.ai/cata	0,08	1,0 ISO ards/sis	6,0 1 to 10,0 /5d3d46da	0,3 -6afd-4	0,5 54e-afb	≥ 70,0	- 9cd0/is	<u> </u>	_	14,0 to 17,0	1,5 to 3,0	_	_	P 0,03							
Ni 6176	NiCr16Fe6	0,05	0,5	5,5 to 7,5	0,5	0,1	≥ 76,0	0,05	_	_	15,0 to 17,0	_	_	_	_							
Ni 6601	NiCr23Fe15Al	0,10	1,0	20,0	0,5	1,0	58,0 to 63,0	_	1,0 to 1,7	_	21,0 to 25,0	_	_	_	P 0,03							
Ni 6693	NiCr29Fe4Al3	0,15	1,0	2,5 to 6,0	0,5	0,5	≥ 53,0	_	2,5 to 4,0	1,0	27,0 to 31,0	0,5 to 2,5	_	_	P 0,03 S 0,01							
Ni 6701	NiCr36Fe7Nb	0,35 to 0,50	0,5 to 2,0	7,0	0,5 to 2,0	_	42,0 to 48,0	_	_	_	33,0 to 39,0	0,8 to 1,8	_	_	_							
Ni 6975	NiCr25Fe13Mo6	0,03	1,0	10,0 to 17,0	1,0	0,7 to 1,2	47,0 to 52,0	_	_	0,70 to 1,50	23,0 to 26,0	_	5,0 to 7,0	_	P 0,03 S 0,03							
Ni 6985	NiCr22Fe20Mo7Cu2	0,01	1,0	18,0 to 21,0	1,0	1,5 to 2,5	≥ 40,0	5,0	_	_	21,0 to 23,5	0,50	6,0 to 8,0	1,5	P 0,04 S 0,03							
Ni 7069	NiCr15Fe7Nb	0,08	1,0	5,0 to 9,0	0,50	0,50	≥ 70,0	_	0,4 to 1,0	2,0 to 2,7	14,0 to 17,0	0,70 to 1,20	_	_	P 0,03							

All					Ch	emical com	position	ı , % (by r	nass <u>fract</u>	tion)a												
Numericalb	Chemical	С	Mn	Fe	Si	Cu	Nic	Со	Al	Ti	Cr	Nb ^d	Mo	W	Others ^{e, f}							
Ni 7092	NiCr15Ti3Mn	0,08	2,0 to 2,7	8,0 D D I	0,3	0,5	≥ 67,0	_	_	2,5 to 3,5	14,0 to 17,0	_	_		P 0,03							
Ni 7718	NiCr19Fe19Nb5Mo3	0,08	0,3	24,0 ds.ite	0,3	0,3	50,0 to 55,0	_	0,2 to 0,8	0,7 to 1,1	17,0 to 21,0	4,8 to 5,5	2,8 to 3,3	_	B 0,006 P 0,015							
Ni 8025	NiFe30Cr29Mo /standards.iteh.ai/cata	0,02	1,0 to 3,0 ards/sis	30,0 18274 1/5d3d46da	0,5 -6afd-4	1,5 to 3,0 54e-afb8	35,0 to 40,0	9cd0/is	0,2	1,0	27,0 to 31,0	_	2,5 to 4,5	_	_							
Ni 8034 ⁱ <u>8034</u>	NiFe29Cr27Mo6Cu	0,10	1,0 to 4,0	24,5 - 33,5	0,10	0,5 to 1,5	33,5 to 35,0	=	0,3	=	26,0 to 27,0	=	6,0 to 7,0	Į	N 0,10 to 0,25							
Ni 8065	NiFe30Cr21Mo3	0,05	1,0	≥ 22,0	0,5	1,5 to 3,0	38,0 to 46,0	_	0,2	0,6 to 1,2	19,5 to 23,5	_	2,5 to 3,5	_	P 0,03 S 0,03							
Ni 8125	NiFe26Cr25Mo	0,02	1,0 to 3,0	30,0	0,5	1,5 to 3,0	37,0 to 42,0	_	0,2	1,0	23,0 to 27,0	_	3,5 to 7,5	_	_							
Ni 8827 ⁱ8827	NiFe30Cr22Mo6	0,015	0,5 to 0,9	≥ 22,0	0,2 to 0,5	1,60 to 2,30	39,0 to 43,0	0,5	0,06 to 0,25	_	21,0 to 23,0	0,15	4,5 to 6,5	_	N 0,03; B 0,002 to 0,004 S 0,005							
Ni 9946	NiCr21Fe15Mo3Nb3	0,005 to 0,040	1,0	28,0	0,5	1,5 to 3,0	45,0 to 55,0	_	0,01 to 0,70	0,5 to 2,5	19,5 to 23,0	2,5 to 4,5	3,0 to 4,0	_	P 0,03							
Nickel-molybd	enum																					
Ni 1001	NiMo28Fe	0,08	1,0	4,0 to 7,0	1,0	0,5	≥ 55,0	2,5	_	_	1,0	_	26,0 to 30,0	1,0	V 0,20 to 0,40 S 0,03							