

INTERNATIONAL
STANDARD

IEC/IEEE
80005-1:2019/
FDAM 1

Second edition
2019-03

AMENDMENT 1

ISO/TC 8/SC 3

Secretariat: ANSI

Voting begins on:
2021-09-17

Voting terminates on:
2021-11-12

Utility connections in port —

Part 1: High voltage shore connection (HVSC) systems — General requirements

AMENDMENT 1: Utility connections in

port
iTeh STANDARD PREVIEW
(standards.iteh.ai)

[IEC/IEEE 80005-1:2019/FDAmd 1](https://standards.iteh.ai/catalog/standards/sist/b0a42d1c-fb2d-481a-a6ab-35c4527b2c5d/iec-ieee-80005-1-2019-fdamd-1)

<https://standards.iteh.ai/catalog/standards/sist/b0a42d1c-fb2d-481a-a6ab-35c4527b2c5d/iec-ieee-80005-1-2019-fdamd-1>

This draft is submitted to a parallel vote in ISO and in IEC.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.



Reference number
IEC/IEEE 80005-1:2019/FDAM 1:2021(E)

© ISO 2021

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[IEC/IEEE 80005-1:2019/FDAmd 1](https://standards.iteh.ai/catalog/standards/sist/b0a42d1c-fb2d-481a-a6ab-35c4527b2c5d/iec-ieee-80005-1-2019-fdam-1)

<https://standards.iteh.ai/catalog/standards/sist/b0a42d1c-fb2d-481a-a6ab-35c4527b2c5d/iec-ieee-80005-1-2019-fdam-1>



COPYRIGHT PROTECTED DOCUMENT

© ISO/IEC 2021, Published in Switzerland

© IEEE 2021

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from ISO, IEC or IEEE at the respective address below.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Institute of Electrical and Electronics Engineers, Inc
3 Park Avenue, New York
NY 10016-5997, USA

stds.ipr@ieee.org
www.ieee.org

INTERNATIONAL ELECTROTECHNICAL COMMISSION

UTILITY CONNECTIONS IN PORT –

**Part 1: High voltage shore connection (HVSC) systems –
General requirements**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and nongovernmental organizations liaising with the IEC also participate in this preparation.

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

IEEE Standards documents are developed within IEEE Societies and Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of IEEE and serve without compensation. While IEEE administers the process and establishes rules to promote fairness in the consensus development process, IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards. Use of IEEE Standards documents is wholly voluntary. IEEE documents are made available for use subject to important notices and legal disclaimers (see <http://standards.ieee.org/IPR/disclaimers.html> for more information).

IEC collaborates closely with ISO and IEEE in accordance with conditions determined by agreement between the organizations. This Triple Logo International Standard was jointly developed by the IEC, ISO and IEEE under the terms of that agreement.

- 2) The formal decisions of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees. In the ISO, Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote. The formal decisions of IEEE on technical matters, once consensus within IEEE Societies and Standards Coordinating Committees has been reached, is determined by a balanced ballot of materially interested parties who indicate interest in reviewing the proposed standard. Final approval of the IEEE Standard document is given by the IEEE Standards Association (IEEE SA) Standards Board.
- 3) IEC/ISO/IEEE Publications have the form of recommendations for international use and are accepted by IEC National Committees/ISO member bodies /IEEE Societies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC/ISO/IEEE Publications is accurate, IEC, ISO or IEEE cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications (including IEC/ISO/IEEE Publications) transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC/ISO/IEEE Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC, ISO, and IEEE do not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC, ISO and IEEE are not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC, ISO or IEEE or their directors, employees, servants or agents including individual experts and members of technical committees and IEC National Committees and ISO member bodies, or volunteers of IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE SA) Standards Board, for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC/ISO/IEEE Publication or any other IEC, ISO or IEEE Publications.
- 8) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.

- 9) Attention is drawn to the possibility that implementation of this IEC/ISO/IEEE Publication may require use of material covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. IEC, ISO or IEEE shall not be held responsible for identifying Essential Patent Claims for which a license may be required, for conducting inquiries into the legal validity or scope of Patent Claims or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from ISO or the IEEE Standards Association.

This amendment has been prepared by IEC technical committee 18: Electrical installations of ships and of mobile and fixed offshore units, in cooperation with

- IEC subcommittee 23H: Plugs, socket-outlets and couplers for industrial and similar applications, and for electric vehicles, of IEC technical committee 23: Electrical accessories,
- ISO subcommittee 3: Piping and machinery, of ISO technical committee 8: Ships and marine technology, and
- IEEE IAS Petroleum and chemical industry committee.

This document is published as a triple logo (IEC, ISO and IEEE) standard.

The text of this amendment is based on the following documents:

Draft	Report on voting
18/XX/FDIS	18/XX/RVD

iTeh STANDARD PREVIEW

Full information on the voting for the approval of this amendment can be found in the report on voting indicated in the above table. In ISO, the amendment has been approved by XXX P members out of YYY having cast a vote.

[IEC/IEEE 80005-1:2019/FDAmd 1](https://standards.iteh.ai/catalog/standards/iec-ieee-80005-1-2019-fdamd-1)

The language used for the development of this Amendment is English. <https://standards.iteh.ai/catalog/standards/iec-ieee-80005-1-2019-fdamd-1>

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

The committee has decided that the contents of this amendment and the base publication will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

2 Normative references

Add, after the existing reference IEC/IEEE 80005-2, the following new reference:

IEEE Std C37.20.2™, *Standard for Metal-Clad Switchgear*

5.1 Voltages and frequencies

Replace the existing fourth paragraph with the following new paragraph:

The phase sequence shall be L1-L2-L3 or A-B-C or R-S-T, anticlockwise. A phase sequence indicator shall indicate correct sequence prior to energizing or paralleling HVSC – see Figure 2 a). Figure 2 b) illustrates the balanced three-phase voltages in the time domain.

Add, after the existing fifth paragraph, the following new note:

NOTE See ship specific annexes for phase assignment of the pins in the connector. The respective contact assignment figures show solid circles as pins and open circles as sockets.

5.2 Quality of HV shore supply

Delete, in item c) of the existing second paragraph, the last sentence.

Figure 3 – Single harmonic distortion limits

Delete the existing figure, including its title.

Replace, after Figure 3, the existing note with the following new note:

NOTE Additional recommendations are provided in IEEE Std 519™, MIL STD 1399-680, and IEC 60092-101.

6.2.1 Circuit-breaker, disconnecter and earthing switch

Replace the existing first paragraph with the following new paragraph and note:

The shore connection switchgear and control gear shall be designed and tested in accordance with IEC 62271-200 or ANSI/UL Metal-Clad Switchgear (IEEE Std C37.20.2™). Switching devices and their combination shall be properly interlocked, to provide safe isolation before earthing and during operation.

NOTE 1 Switching devices and their combination for isolation and earthing can be part of different switchgear functional units (see IEC 60050-441:2000, 441-13-04).

Replace, in the existing note, the word "NOTE" with "NOTE 2".

7.3.4 Fibre-optic connection

Delete the existing subclause, including its title.

B.1 General

Delete, in the existing first paragraph, the words "excluding pure car carriers".

Figure B.1 – General system diagram

Replace the existing key 2 and 3 with the following new keys:

- 2 Power ship connector (shore-side) and ship inlet (onboard)
- 3 Fibre optic communication for control and monitoring (integrated in power cable); socket-outlet (shore-side) and plug (on-board) (this document does not specify requirements for optic communication)

B.7.1 General

Replace the existing paragraph with the following new paragraph:

For 6,6 kV systems, one cable shall be used for HVSC system up to a power demand of 3,5 MVA.
For 11 kV systems, one cable shall be used for HVSC system up to a power demand of 6,5 MVA.

B.7.3.1 General

Replace the existing first paragraph with the following new paragraph:

General arrangement of ship connector and ship inlet shall be in accordance with IEC 62613-2:2016, Annex J, and Figure B.3 below.

Figure B.3 – Three-phase plug and socket-outlet contact assignment

Replace the existing title with the following new title:

Figure B.3 – Three-phase ship connector and ship inlet contact assignment

Replace the existing key 1 and key 2 with the following new keys:

- 1 Ship connector face <https://standards.iteh.ai/catalog/standards/sist/b0a42d1c-fb2d-481a-a6ab-35c4527b2c5d/iec-ieee-80005-1-2019-fdamd-1>
- 2 Ship inlet face

Replace the last existing two paragraphs with the following new paragraphs:

Each connector and ship inlet shall be fitted with seven pilot contacts.

For design and dimensions, see IEC 62613-1 and IEC 62613-2:2016.

B.7.3.4 Fibre-optic connection

Delete the existing subclause, including its title.


Figure C.1 – General system diagram

Replace the existing key 2 with the following new key:

- 2 Ship connector (shore side) and ship inlet (onboard), four times

Figure C.4 – Three-phase ship connector and ship inlet contact assignment

Replace the existing figure and key with the following new figure and key:

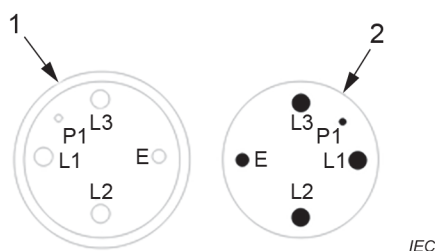

Key

- 1 Ship connector face
- 2 Ship inlet face
- E Earth
- P1 Pilot line 1 (used for continuity check)
- L1 Phase A – phase R
- L2 Phase B – phase S
- L3 Phase C – phase T

Figure D.1 – General system diagram

Replace the existing key 3 with the following new key:

- 3 Fibre optic communication for control and monitoring (integrated in power cable); plug (shore-side) and socket outlet (on-board) (this document does not specify requirements for optic communication)

D.7.3.1 General <https://standards.iteh.ai/catalog/standards/sist/b0a42d1c-fb2d-481a-a6ab-35c4527b2c5d/iec-ieee-80005-1-2019-fdamd-1>

Replace, in the existing third paragraph, the word "Annex II" with "Annex I".

D.7.3.4 Fibre-optic connection

Delete the existing subclause, including its title.

Figure E.1 – General system diagram

Replace the existing key 2 and 3 with the following new keys:

- 2 Power ship connector (shore-side) and ship inlet (onboard)
- 3 Fibre optic communication for control and monitoring (integrated in power cable); socket-outlet (shore-side) and plug (on-board) (this document does not specify requirements for optic communication)

E.7.3.1 General

Replace, in the existing first paragraph, the words "shore plug and ship socket-outlet" with "ship connector and ship inlet".

Figure E.2 – Three-phase ship connector and ship inlet contact assignment

Replace the existing key 1 and key 2 with the following new keys:

- 1 Ship connector face
- 2 Ship inlet face

E.7.3.4 Fibre-optic connection

Delete the existing subclause, including its title.

Figure F.1 – General system diagram

Replace the existing key 2 and key 4 with the following new keys:

- 2 Power ship connector (shore-side) and ship inlet (onboard)
- 4 Pilot wires (integrated in ship connector and ship inlet)

F.7.3.1 General

Replace the existing second and third paragraphs with the following new paragraphs:

General arrangement of ship connector and ship inlet shall be in accordance with IEC 62613-2:2016, Annex I, and Figure F.2 below.

Each ship connector and ship inlet should be fitted with three pilot contacts.

Figure F.2 – Three-phase shore plug and ship socket-outlet contact assignment

Replace the existing title with the following new title:

Figure F.2 – Three-phase ship connector and ship inlet contact assignment

Replace the existing key 1 and key 2 with the following new keys:

- 1 Ship connector face
- 2 Ship inlet face

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Bibliography

Add, after the existing first reference, the following new references:

IEC 60050-441, *International Electrotechnical Vocabulary – Part 441: Switchgear, controlgear and fuses* (available at www.electropedia.org)

IEC 60092-101, *Electrical installations in ships – Part 101: Definitions and general requirements*

Delete the existing reference IEEE Std C37.20.2™.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[IEC/IEEE 80005-1:2019/FDAmd 1](https://standards.iteh.ai/catalog/standards/sist/b0a42d1c-fb2d-481a-a6ab-35c4527b2c5d/iec-ieee-80005-1-2019-fdamd-1)

<https://standards.iteh.ai/catalog/standards/sist/b0a42d1c-fb2d-481a-a6ab-35c4527b2c5d/iec-ieee-80005-1-2019-fdamd-1>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[IEC/IEEE 80005-1:2019/FDAmd 1](https://standards.iteh.ai/catalog/standards/sist/b0a42d1c-fb2d-481a-a6ab-35c4527b2c5d/iec-ieee-80005-1-2019-fdamd-1)

<https://standards.iteh.ai/catalog/standards/sist/b0a42d1c-fb2d-481a-a6ab-35c4527b2c5d/iec-ieee-80005-1-2019-fdamd-1>