

INTERNATIONAL STANDARD

NORME INTERNATIONALE

INTERNATIONAL SPECIAL COMMITTEE ON RADIO INTERFERENCE
COMITÉ INTERNATIONAL SPÉCIAL DES PERTURBATIONS RADIOÉLECTRIQUES

AMENDMENT 1
AMENDEMENT 1

**Electromagnetic compatibility (EMC) –
Part 6-3: Generic standards – Emission standard for residential, commercial
and light-industrial environments**

**Compatibilité électromagnétique (CEM) –
Partie 6-3: Normes génériques – Norme sur l'émission pour les environnements
résidentiels, commerciaux et de l'industrie légère**



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2010 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

- Catalogue des publications de la CEI: www.iec.ch/searchpub/cur_fut-f.htm

Le Catalogue en-ligne de la CEI vous permet d'effectuer des recherches en utilisant différents critères (numéro de référence, texte, comité d'études,...). Il donne aussi des informations sur les projets et les publications retirées ou remplacées.

- Just Published CEI: www.iec.ch/online_news/justpub

Restez informé sur les nouvelles publications de la CEI. Just Published détaille deux fois par mois les nouvelles publications parues. Disponible en-ligne et aussi par email.

- Electropedia: www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 20 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International en ligne.

- Service Clients: www.iec.ch/webstore/custserv/custserv_entry-f.htm

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions, visitez le FAQ du Service clients ou contactez-nous:

Email: csc@iec.ch

Tél.: +41 22 919 02 11

Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

NORME INTERNATIONALE

INTERNATIONAL SPECIAL COMMITTEE ON RADIO INTERFERENCE
COMITÉ INTERNATIONAL SPÉCIAL DES PERTURBATIONS RADIOÉLECTRIQUES

AMENDMENT 1
AMENDEMENT 1

**Electromagnetic compatibility (EMC) –
Part 6-3: Generic standards – Emission standard for residential, commercial
and light-industrial environments**

**Compatibilité électromagnétique (CEM) –
Partie 6-3: Normes génériques – Norme sur l'émission pour les environnements
résidentiels, commerciaux et de l'industrie légère**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX

M

ICS 33.100.10

ISBN 978-2-88912-252-3

ELECTROMAGNETIC COMPATIBILITY (EMC) –

Part 6-3: Generic standards – Emission standard for residential, commercial and light-industrial environments

INTERPRETATION SHEET

This interpretation sheet has been prepared by CISPR subcommittee H: Limits for the protection of radio services, of IEC technical committee CISPR: International special committee on radio interference.

The text of this interpretation sheet is based on the following documents:

FDIS	Report on voting
CISPR/H/217/FDIS	CISPR/H/222/RVD

Full information on the voting for the approval of this interpretation sheet can be found in the report on voting indicated in the above table.

Interpretation

The requirement in Clause 8 “Measurement uncertainty” of IEC 61000-6-3 Amend. 1 ed. 2.0:

8 Measurement uncertainty

The measurement instrumentation uncertainty shall be determined according to CISPR 16-4-2, where applicable.

NOTE For a given test method, the actual value of U_{lab} has only to be recorded in the test report if the value is greater than U_{CISPR} .

shall be interpreted as follows:

The measurement instrumentation uncertainty shall be calculated and compared with the budgets defined in CISPR 16-4-2. For each applicable test method, whose instrumentation uncertainty budgets are higher than those defined in CISPR 16-4-2, compliance with the limits has to be determined according to CISPR 16-4-2 methodology. This requirement is only applicable for tests where an uncertainty budget is defined in CISPR 16-4-2.

The additional note was further clarification that there is no need to state in the test report the laboratory uncertainty budget U_{lab} if this is less than or equal to the U_{CISPR} defined in CISPR 16-4-2. However, it has to be mentioned in the test report that the instrumentation measurement uncertainty is determined according to CISPR 16-4-2.

FOREWORD

This amendment has been prepared by CISPR subcommittee H: Limits for the protection of radio services.

The text of this amendment is based on the following documents:

FDIS	Report on voting
CISPR/H/206/FDIS	CISPR/H/210/RVD

Full information on the voting for the approval of this amendment can be found in the report on voting indicated in the above table.

The committee has decided that the contents of this amendment and the base publication will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

The contents of the interpretation sheet 1 of July 2011 have been included in this copy.

Contents

Replace the title of Clause 3 by the following new title:

3 Terms, definitions and abbreviations

Replace the title of Clause 8 by the following new title:

8 Measurement uncertainty

Replace the title of Clause 9 by the following new title:

9 Application of limits in tests for conformity of equipment in series production

Add the following new Clauses 10 and 11:

10 Compliance with this standard

11 Emission test requirements

Replace the title of Table 1 by the following new title:

Table 1 – Emission – Enclosure port

Add the following new Tables:

Table 2 – Emission – Low voltage AC mains port

Table 3 – Emission – DC power port

2 Normative references

Add the following new references to the existing list:

IEC 60050-161, *International Electrotechnical Vocabulary (IEV) – Chapter 161: Electromagnetic compatibility*

IEC 61000-4-20:2010, *Electromagnetic compatibility (EMC) – Part 4-20: Testing and measurement techniques – Emission and immunity testing in transverse electromagnetic (TEM) waveguide*

CISPR 16-1-1:2010, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1-1: Radio disturbance and immunity measuring apparatus – Measuring apparatus*

CISPR 16-1-4:2007, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1-4: Radio disturbance and immunity measuring apparatus – Ancillary equipment – Radiated disturbances*
Amendment 1:2007

Replace the existing references by the following new references:

IEC 61000-3-2:2005 *Electromagnetic compatibility (EMC) – Part 3-2: Limits – Limits for harmonic current emissions (equipment input current ≤ 16 A per phase)*
Amendment 1:2008
Amendment 2:2009

IEC 61000-3-3:2008, *Electromagnetic compatibility (EMC) – Part 3-3: Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection*

IEC 61000-3-11:2000, *Electromagnetic compatibility (EMC) – Part 3-11: Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems – Equipment with rated current ≤ 75 A and subject to conditional connection*

IEC 61000-3-12:2004, *Electromagnetic compatibility (EMC) – Part 3-12: Limits – Limits for harmonic currents produced by equipment connected to public low-voltage systems with input current > 16 A and ≤ 75 A per phase*

CISPR 14-1:2005, *Electromagnetic compatibility – Requirements for household appliances, electric tools and similar apparatus – Part 1: Emission*
Amendment 1:2008

CISPR 16-1-2:2003, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 1-2: Radio disturbance and immunity measuring apparatus – Ancillary equipment – Conducted disturbances*
Amendment 1:2004
Amendment 2:2006

CISPR 16-2-1:2008, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 2-1: Methods of measurement of disturbances and immunity – Conducted disturbance measurements*

CISPR 16-2-3:2006, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 2-3: Methods of measurement of disturbances and immunity – Radiated disturbance measurements*

CISPR 16-4-2:2003, *Specification for radio disturbance and immunity measuring apparatus and methods – Part 4-2: Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements*

CISPR 22:2008, *Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement*

3 Terms and definitions

Replace the title, first paragraph and Note of this clause by the following:

3 Terms, definitions and abbreviations


3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-161, as well as the following apply.

Renumber the existing definitions 3.1, 3.2, 3.3, 3.4, 3.5, 3.6, 3.7, 3.8 as 3.1.1, 3.1.2, 3.1.3, 3.1.4, 3.1.5, 3.1.6, 3.1.7, 3.1.8 respectively.

Figure 1 – Examples of port

Replace the existing figure and title by the following new figure and title:

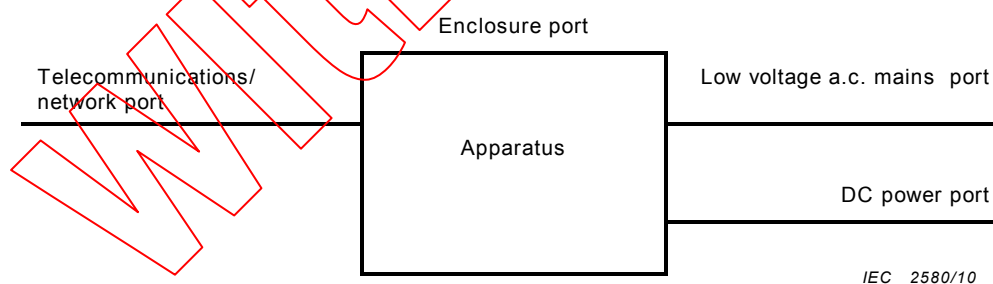

IEC 2580/10

Figure 1 – Ports covered by Tables 1 to 4

Add, after definition 3.1.8, the following new definitions 3.1.9 and 3.1.10:

3.1.9

low voltage AC mains port

port used to connect to the low voltage AC mains supply network to power the equipment

NOTE Equipment with a DC power port is considered low voltage AC mains powered if it is powered from an AC/DC power converter.

3.1.10

highest internal frequency

highest fundamental frequency generated or used within the EUT, or the highest frequency at which it operates

After definition 3.1.10, add the following new subclause:

3.2 Abbreviations

AC	Alternating Current
DC	Direct Current
EUT	Equipment Under Test
FAR	Fully Anechoic Room
ISN	Impedance Stabilization Network
OATS	Open Area Test Site
SAC	Semi Anechoic Chamber
TEM	Transverse Electromagnetic Mode

4 Conditions during testing

At the end of Clause 4 add the following paragraph:

Where applicable, additional information on EUT configuration can be found in the CISPR 16-2 series and CISPR 22.

6 Applicability

Replace the second paragraph of this clause by the following new paragraph:

Measurements shall be applied to the relevant ports of the apparatus according to Tables 1 to 4. Measurements shall only be carried out where the relevant ports exist.

7 Emission requirements

Replace the first paragraph of this clause by the following new paragraph:

The emission requirements for apparatus covered by this standard are given on a port by port basis. The requirements are stated in Tables 1 to 4.

Replace the fourth paragraph of this clause by the following new paragraph:

The description of the measurement, the measurement instrumentation, the measurement methods and the measurement set-up to be used are given in the standards, which are referred to in Tables 1 to 4.

8 Application of limits in tests for conformity of equipment in series production

Replace the existing title and text of this clause by the following new title and text:

8 Measurement uncertainty

The measurement instrumentation uncertainty shall be determined according to CISPR 16-4-2, where applicable.

NOTE For a given test method, the actual value of U_{lab} has only to be recorded in the test report if the value is greater than U_{CISPR} .

9 Measurement uncertainty

Replace the existing title and text of this clause by the following new title and text:

9 Application of limits in tests for conformity of equipment in series production

9.1 Tests shall be made:

- either on a sample of equipment of the type using the statistical method of evaluation set out in 9.2,
- or, for simplicity's sake, on one equipment only.

9.2 Statistically assessed compliance with limits shall be made as follows.

This test shall be performed on a sample of not less than five and not more than 12 items of the type. If, in exceptional circumstances, five items are not available, a sample of four or three shall be used. Compliance is judged from the following relationship:

$$\bar{x} + kS_n \leq L$$

where

$\bar{x}$ is the arithmetic mean of the measured value of n items in the sample

$$S_n^2 = \frac{1}{n-1} \sum_{i=1}^n (x_i - \bar{x})^2$$

x_n is the value of the individual item

L is the appropriate limit

k is the factor derived from tables of the non-central t -distribution which assures with 80 % confidence that 80 % of the type is below the limit; the value of k depends on the sample size n and is stated below.

The quantities x_n , $\bar{x}$, S_n and L are expressed logarithmically: dB(μV), dB(μV/m) or dB(pW).

n	3	4	5	6	7	8	9	10	11	12
k	2,04	1,69	1,52	1,42	1,35	1,30	1,27	1,24	1,21	1,20

Delete the existing Table 1, and add the following new Clause 10:

10 Compliance with this standard

Where this standard gives options for testing particular requirements with a choice of test methods, compliance can be shown against any of the test methods, using the specified limits with the restrictions provided in the relevant tables.

In any situation where it is necessary to retest the equipment the test method original chosen should be used in order to ensure consistency of the results.

Equipment which fulfills the requirements across the frequency ranges specified in Clause 11 Tables 1 to 4 in this standard is deemed to fulfill the requirements in the entire frequency range from 9 kHz to 400 GHz.