

---

---

**Information technology —  
Metamodel framework for  
interoperability (MFI) —**

**Part 5:  
Metamodel for process model  
registration**

*Technologies de l'information — Cadre du métamodèle pour  
l'interopérabilité (MFI) —*

*Partie 5: Métamodèle pour l'enregistrement du modèle de procédé*

get full document from [standards.iteh.ai](https://standards.iteh.ai)

# Sample Document

get full document from [standards.iteh.ai](https://standards.iteh.ai)



## **COPYRIGHT PROTECTED DOCUMENT**

© ISO/IEC 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
[copyright@iso.org](mailto:copyright@iso.org)  
[www.iso.org](http://www.iso.org)

# Contents

	Page
<b>Foreword</b> .....	<b>iv</b>
<b>Introduction</b> .....	<b>v</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>2</b>
<b>3 Terms, definitions and abbreviated terms</b> .....	<b>2</b>
3.1 Terms and definitions.....	2
3.2 Abbreviated terms.....	4
<b>4 Conformance</b> .....	<b>5</b>
4.1 General.....	5
4.2 Degree of conformance.....	5
4.2.1 General.....	5
4.2.2 Strictly conforming implementation.....	5
4.2.3 Conforming implementation.....	5
4.3 Implementation Conformance Statement (ICS).....	5
<b>5 Structure of MFI Process model registration</b> .....	<b>6</b>
5.1 Overview of MFI Process model registration.....	6
5.2 Associations between MFI Process model registration and other parts in MFI.....	7
5.3 Metaclasses in MFI Process model registration.....	8
5.3.1 Dependency.....	8
5.3.2 Event.....	9
5.3.3 Join_Dependency.....	9
5.3.4 Join_Dependency_Option.....	11
5.3.5 Process.....	11
5.3.6 Process_Model.....	13
5.3.7 Process_Model_Element.....	14
5.3.8 Process_Modelling_Language.....	16
5.3.9 Resource.....	17
5.3.10 Sequence_Dependency.....	18
5.3.11 Split_Dependency.....	19
5.3.12 Split_Dependency_Option.....	20
<b>Annex A (informative) Examples of MFI Process model registration</b> .....	<b>21</b>
<b>Annex B (informative) List of process modelling languages</b> .....	<b>34</b>
<b>Bibliography</b> .....	<b>35</b>

## Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 19763-5 was prepared by Joint Technical Committee ISO/IEC JTC 1, *Information Technology*, Subcommittee SC 32, *Data management and Interchange*.

ISO/IEC 19763 consists of the following parts, under the general title *Information technology — Metamodel framework for interoperability (MFI)*:

- *Part 1: Framework*
- *Part 3: Metamodel for ontology registration*
- *Part 5: Metamodel for process model registration*
- *Part 6: Registry summary*
- *Part 7: Metamodel for service model registration*
- *Part 8: Metamodel for role and goal model registration*
- *Part 9: On demand model selection [Technical Report]*
- *Part 10: Core model and basic mapping*
- *Part 12: Metamodel for information model registration*
- *Part 13: Metamodel for form design registration*

## Introduction

Business process collaboration and integration is growing due to worldwide economic pressures to streamline product development and delivery, and reduce operational costs. Enterprises are merging and forming partnerships to address these issues. Providing for the registration of process models in a standard registry so that they can be discovered, understood and compared for use and integration, will help to promote interoperation within and across enterprises.

Business process modelling languages and notations are widely used to represent processes for different purposes. However, the differences in the syntax and semantics of process models hamper sharing and reusing them among enterprises. Therefore, it is necessary to provide a generic mechanism to support registration of administrative information and selected metadata about process models.

This part of ISO/IEC 19763 provides a metamodel to support the registration of selected metadata and semantics of process models for process discovery and reuse. It offers guidance which highlights the common semantics of process models, helps people clarify the structure of a process and the relationship between processes, and aids in discovering processes, regardless of the notation in which they were originally written. Any information related to the details of process modelling languages or the platform for process execution is not taken into account. In particular, although the registration information of process models can be used to support further discovery of web services in terms of the associations between process and web services, the process representing either the execution order within a web service or the orchestration of a set of web services is out of the scope of this part.

NOTE In this part, 'process' is meant to be 'business process', and 'process model' is meant to be 'business process model'.

# Sample Document

get full document from [standards.iteh.ai](https://standards.iteh.ai)

# Sample Document

get full document from [standards.iteh.ai](https://standards.iteh.ai)


# Information technology — Metamodel framework for interoperability (MFI) —

## Part 5: Metamodel for process model registration

### 1 Scope

The primary purpose of the multipart standard ISO/IEC 19763 is to specify a metamodel framework for interoperability.

This part of ISO/IEC 19763 specifies the metamodel that describes a facility to register administrative information and selected metadata about process models. The metamodel specified in this part of ISO/IEC 19763 is intended to promote semantic discovery and reuse of process models within/across process model repositories. For this purpose, it provides selected metadata and common semantics of process models created with a specific process modelling language, including Business Process Model and Notation (BPMN)<sup>[1]</sup>, UML (Unified Modelling Language) Activity Diagram<sup>[5]</sup> and EPC (Event-driven Process Chain)<sup>[2]</sup>, etc. The metamodel can help discovery of the function and composition of a process, and promote reuse of its components at different levels of granularity. [Figure 1](#) shows the scope of this part of ISO/IEC 19763.

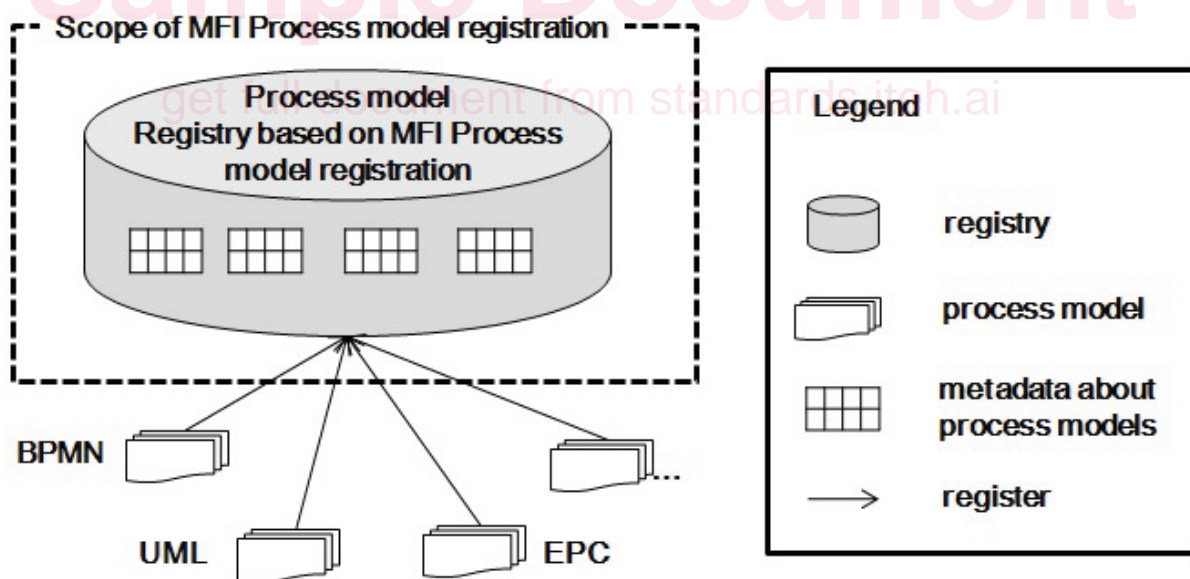

NOTE Not every model needs to exist in a repository before registration.

**Figure 1 — The scope of MFI Process model registration**

The following are outside the scope of this part of ISO/IEC 19763:

- details related to modelling notations or descriptive languages of process models;
- runtime environments or implementation platforms for executing processes.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 19763-1, *Information technology — Metamodel framework for interoperability (MFI) — Part 1: Framework*

ISO/IEC 19763-7, *Information technology — Metamodel framework for interoperability (MFI)— Part 7: Metamodel for service model registration*

ISO/IEC 19763-8, *Information technology — Metamodel framework for interoperability (MFI) — Part 8: Metamodel for role and goal model registration*

ISO/IEC 19763-10, *Information technology — Metamodel framework for interoperability (MFI) — Part 10: Core model and basic mapping*

## 3 Terms, definitions and abbreviated terms

### 3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/IEC 19763-7, ISO/IEC 19763-8 and ISO/IEC 19763-10, and the following apply.

#### 3.1.1 activity

set of cohesive *tasks* ([3.1.21](#))

[SOURCE: ISO/IEC 12207:2008, 4.3, modified]

#### 3.1.2

##### control constraint

restriction on the execution order for a given collection of *processes* ([3.1.12](#))

#### 3.1.3

##### dependency

relationship between *process model elements* ([3.1.14](#)), that specifies the *control constraints* ([3.1.2](#))

#### 3.1.4

##### event

occurrence of a particular set of circumstances

#### 3.1.5

##### exit condition

constraint that, if true, will cause an operation to terminate before its completion

Note 1 to entry: The operation can be a process or a service operation.

#### 3.1.6

##### goal

intended outcome of user interaction with a *process* ([3.1.12](#)) or *service* ([3.1.18](#))

[SOURCE: ISO/IEC 19763-8:—, 3.1.1]

#### 3.1.7

##### guard condition

condition that must be satisfied before an associated *process* ([3.1.12](#)) can execute

**3.1.8****involvement type**

statement that indicates the type of involvement of a role with a *process* (3.1.12) or *service* (3.1.18)

EXAMPLE Performer, beneficiary, customer.

[SOURCE: ISO/IEC 19763-8:—, 3.1.4]

**3.1.9****join dependency**

kind of a dependency, specifying that the following *process model element* (3.1.14) will start when the selected preceding **process model elements** (3.1.14) are completed

**3.1.10****postcondition**

constraint that must be true at the completion of an operation

[SOURCE: ISO/IEC 14813-5:2010, B.1.116]

Note 1 to entry: The operation can be a process or a service operation.

**3.1.11****precondition**

constraint that must be true when an operation is invoked

[SOURCE: ISO/IEC 14813-5:2010, B.1.117]

Note 1 to entry: The operation can be a process or a service operation.

**3.1.12****process**

collection of related, structured *activities* (3.1.1) or *tasks* (3.1.21) that achieve a particular *goal* (3.1.16)

Note 1 to entry: The activities and tasks are represented by the Process metaclass in this part.

**3.1.13****process model**

representation of a *process* (3.1.12), using a specific *process modelling language* (3.1.15)

**3.1.14****process model element**

abstraction of the modelling constructs that constitutes a *process* (3.1.12), including *processes* (3.1.12) and *dependencies* (3.1.3) among them

**3.1.15****process modelling language**

special language used to represent *processes* (3.1.12)

Note 1 to entry: PSL, BPMN, UML Activities etc. are all process modelling languages.

Note 2 to entry: Special language [ISO 1087-1:2000, 3.1.3].

**3.1.16****resource**

asset that is utilized, created or consumed by a *process model element* (3.1.14)

Note 1 to entry: The resources can be either physical or virtual.

**3.1.17****role**

named specific behaviour of an entity participating in a particular context

[SOURCE: ISO/IEC 19763-8:—, 3.1.7]

**3.1.18  
service**

kind of application which encapsulates one or more computing modules and can be accessed through a specified interface

[SOURCE: ISO/IEC 19763-7:—, 3.1.13]

**3.1.19  
sequence dependency**

kind of control constraint between *processes* (3.1.12), specifying that the *processes* (3.1.12) are executed in order

**3.1.20  
split dependency**

kind of control constraint between *process model elements* (3.1.14), specifying that if the preceding *process model element* (3.1.14) is completed, one or more of the following *process model elements* (3.1.14) will execute in parallel

**3.1.21  
task**

specific piece of work to be done

[SOURCE: ISO 16091:2002, 3.1.25]

**3.2 Abbreviated terms**

<b>BPMN</b>	Business Process Model and Notation [SOURCE: OMG BPMN version 2, formal/2011-01-03]
<b>EPC</b>	Event-driven Process Chain
<b>MFI</b>	Metamodel framework for interoperability [SOURCE: ISO/IEC 19763-1:2007, 4.2]
<b>MFI Core and mapping</b>	ISO/IEC 19763-10, Information technology – Metamodel framework for interoperability (MFI) – Part 10: Core model and basic mapping
<b>MFI Process model registration</b>	ISO/IEC 19763-5, Information technology – Metamodel framework for interoperability (MFI) – Part 5: Metamodel for process model registration
<b>MFI Role and Goal model registration</b>	ISO/IEC 19763-8, Information technology – Metamodel framework for interoperability (MFI) – Part 8: Metamodel for role and goal model registration
<b>MFI Service model registration</b>	ISO/IEC 19763-7, Information technology – Metamodel framework for interoperability (MFI) – Part 7: Metamodel for service model registration
<b>OWL-S</b>	Web ontology language for service [Z]
<b>PSL</b>	Process Specification Language [ISO/IEC 18629-1]
<b>UML</b>	Unified Modeling Language [ISO/IEC 19505-2]

## 4 Conformance

### 4.1 General

An implementation claiming conformance with this part of ISO/IEC 19763 shall support the metamodel specified in [Clause 5](#), depending on a degree of conformance as described below.

### 4.2 Degree of conformance

#### 4.2.1 General

The distinction between 'strictly conforming' and 'conforming' implementations is necessary to address the simultaneous needs for interoperability and extensions. This part of ISO/IEC 19763 describes specifications that promote interoperability. Extensions are motivated by needs of users, vendors, institutions and industries, but are not specified by this part of ISO/IEC 19763.

A strictly conforming implementation may be limited in usefulness but is maximally interoperable with respect to this part of ISO/IEC 19763. A conforming implementation may be more useful, but may be less interoperable with respect to this part of ISO/IEC 19763.

#### 4.2.2 Strictly conforming implementation

A strictly conforming implementation

- a) shall support the metamodel specified in [Clause 5](#);
- b) shall not use, test, access, or probe for any extension features nor extensions to the metamodel specified in [Clause 5](#).

#### 4.2.3 Conforming implementation

A conforming implementation

- a) shall support the metamodel specified in [Clause 5](#);
- b) as permitted by the implementation, may use, test, access, or probe for any extension features or extensions to the metamodel specified in [Clause 5](#).

NOTE 1 All strictly conforming implementations are also conforming implementations.

NOTE 2 The use of extensions to the metamodel might cause undefined behaviour.

### 4.3 Implementation Conformance Statement (ICS)


An implementation claiming conformance to this part of ISO/IEC 19763 shall include an Implementation Conformance Statement stating:

- a) whether it is a strictly conforming implementation (see [4.2.2](#)) or a conforming implementation (see [4.2.3](#));
- b) what extensions, if any, are supported or used if it is a conforming implementation.

## 5 Structure of MFI Process model registration

### 5.1 Overview of MFI Process model registration

MFI Process model registration provides a generic metamodel to register selected metadata about process models described by a specific modelling language. [Figure 2](#) shows the metamodel for process model registration.

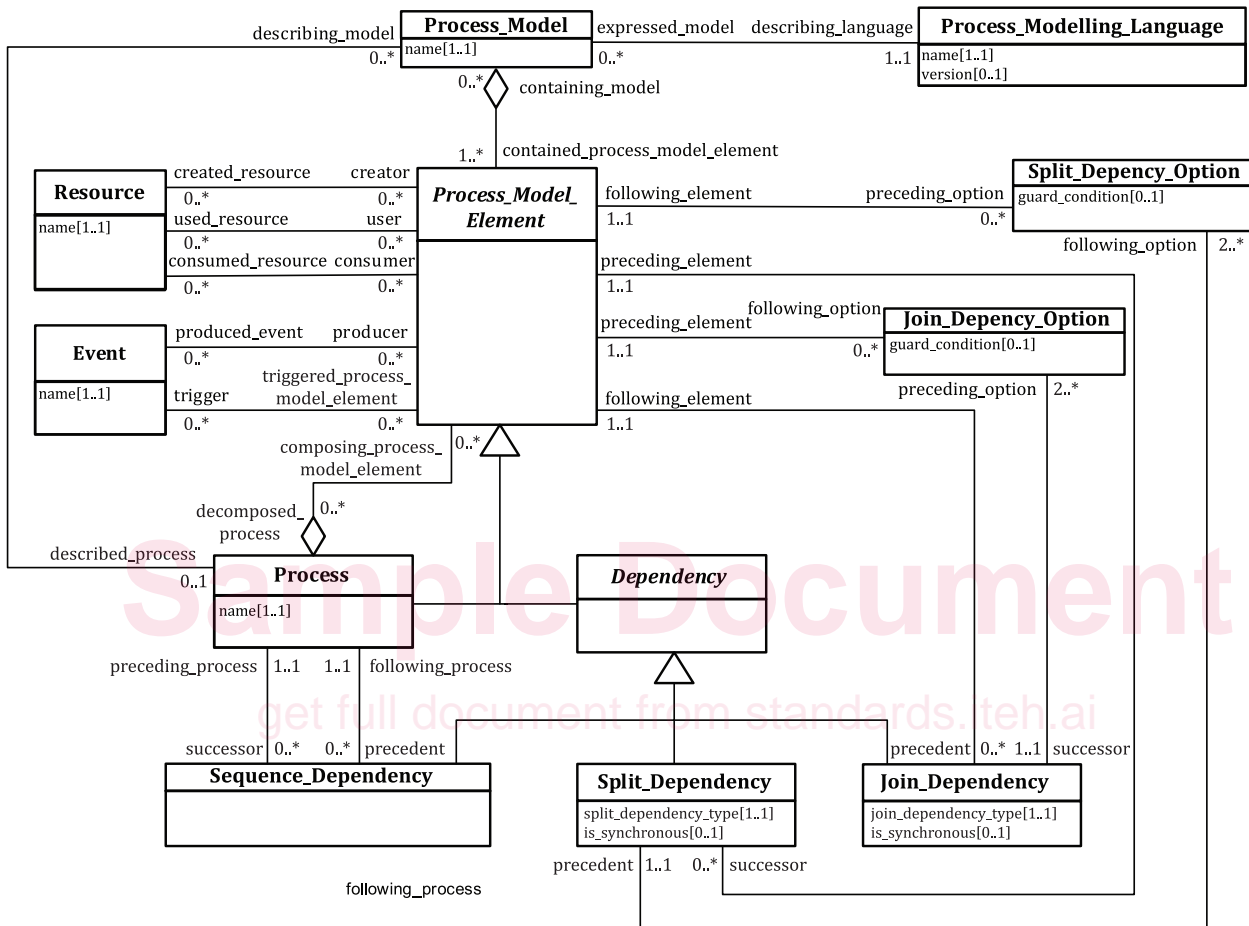

NOTE Metaclasses whose names are italicized are abstract metaclasses.

**Figure 2 — The metamodel of MFI Process model registration**

In this part, a process model is used as a representation of a process, and it describes the contained process model elements using a specified process modelling language. The process model elements include processes and dependencies between processes and/or other process model elements. For each process model element, there are some events that can be used to trigger a process model element or to be produced by a process model element. To achieve a particular goal, some resources are used, created or consumed by a process model element.

Dependencies represent the control constraints among processes represented by a process model. In this part, a dependency can be specialized as a sequence dependency, a split dependency, or a join dependency. A sequence dependency specifies that the processes are executed in order. A split dependency specifies that when the preceding process model element is completed, one or more of the following process model elements will execute in parallel. A join dependency specifies that the following process model element will start when the selected preceding process model elements are completed. In a split dependency, a split dependency type is used to specify a logical gate for the following processes. In a join dependency, similarly, a join dependency type is used to specify a logical gate for the preceding processes. In this part, the values of both a split dependency type and a join dependency type can be