

# INTERNATIONAL STANDARD

# NORME INTERNATIONALE



**Time relays and coupling relays for industrial and residential use –  
Part 1: Requirements and tests**

**Relais temporisés et relais de couplage pour applications industrielles et  
résidentielles –**

**Partie 1: Exigences et essais**

[IEC 61812-1:2023](#)

[standards/sist/53361bdd-3add-4f46-b0dc-25001780d995/iec-61812-1-2023](#)



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2023 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Secretariat  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

#### IEC publications search - [webstore.iec.ch/advsearchform](http://webstore.iec.ch/advsearchform)

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

#### IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

#### IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [sales@iec.ch](mailto:sales@iec.ch).

#### IEC Products & Services Portal - [products.iec.ch](http://products.iec.ch)

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

#### Electropedia - [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

### A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

### A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

#### Recherche de publications IEC -

##### [webstore.iec.ch/advsearchform](http://webstore.iec.ch/advsearchform)

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, ...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

#### IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

#### Service Clients - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: [sales@iec.ch](mailto:sales@iec.ch).

#### IEC Products & Services Portal - [products.iec.ch](http://products.iec.ch)

Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

#### Electropedia - [www.electropedia.org](http://www.electropedia.org)

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 300 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 19 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

# INTERNATIONAL STANDARD

# NORME INTERNATIONALE



**Time relays and coupling relays for industrial and residential use –  
Part 1: Requirements and tests**

**Relais temporisés et relais de couplage pour applications industrielles et  
résidentielles –**

**Partie 1: Exigences et essais**

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

COMMISSION  
ELECTROTECHNIQUE  
INTERNATIONALE

ICS 29.120.70

ISBN 978-2-8322-7072-1

**Warning! Make sure that you obtained this publication from an authorized distributor.  
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

## CONTENTS

FOREWORD.....	6
1 Scope.....	8
2 Normative references .....	8
3 Terms and definitions .....	10
3.1 Terms and definitions related to general terms.....	10
3.2 Terms and definitions of time relay types .....	15
4 Classification.....	22
4.1 Switching element.....	22
4.2 Mechanical construction.....	22
4.3 Device mounting .....	22
4.4 Connection .....	22
4.5 Environment .....	22
5 Influence quantities .....	22
6 Rated values .....	23
6.1 General.....	23
6.2 Input voltage and frequency .....	23
6.3 Release voltage .....	24
6.4 Power consumption.....	24
6.5 Output circuit .....	24
6.5.1 General .....	24
6.5.2 Electromechanical output circuit .....	24
6.5.3 Solid state output circuit .....	25
6.5.4 Endurance and operating frequency .....	25
6.5.5 Conditional short-circuit current .....	26
6.6 Ambient temperature.....	26
6.7 Transport and storage temperature .....	26
6.8 Humidity .....	26
6.9 Pollution degree.....	26
6.10 Altitude .....	26
6.11 Timing circuit function .....	26
6.11.1 General .....	26
6.11.2 Setting accuracy .....	27
6.11.3 Repeatability .....	27
6.11.4 Recovery time and minimum control impulse .....	27
7 Provisions for testing .....	27
7.1 General.....	27
7.2 Type test.....	27
7.3 Routine test .....	28
7.4 Sampling test.....	29
8 Documentation and marking .....	29
8.1 Data.....	29
8.2 Marking.....	32
9 Heating.....	32
9.1 General.....	32
9.2 Test conditions .....	33
9.3 Heating of terminals.....	33

9.3.1	General .....	33
9.3.2	Heating of screw terminals and screwless terminals .....	33
9.3.3	Heating of quick-connect terminations .....	34
9.3.4	Heating of sockets .....	34
9.3.5	Heating of alternative termination types .....	35
9.4	Heating of accessible parts .....	35
9.5	Ball pressure test .....	35
10	Basic operating function .....	36
10.1	General .....	36
10.2	Operate .....	36
10.3	Release .....	36
10.4	Time function .....	36
10.4.1	General .....	36
10.4.2	Functional test at reference values of input quantities .....	36
10.4.3	Effect of influence of voltage and temperature .....	37
11	Dielectric strength and impulse withstand .....	37
11.1	General .....	37
11.2	Preconditioning .....	37
11.3	Insulation test .....	38
11.3.1	General .....	38
11.3.2	Impulse withstand test .....	38
11.3.3	Dielectric AC power frequency voltage test .....	39
12	Electrical endurance .....	40
12.1	General .....	40
12.2	Resistive loads, inductive loads, and special loads .....	40
12.3	Low energy loads .....	40
13	Conditional short-circuit current of an output circuit .....	41
13.1	General .....	41
13.2	Test procedure .....	41
13.3	Test circuit electromechanical output circuit .....	41
13.4	Test circuit solid state output circuit .....	42
13.5	Condition of switching element after test .....	42
14	Insulation coordination and protection against electric shock .....	43
14.1	General .....	43
14.2	Clearances and creepage distances .....	43
14.2.1	General .....	43
14.2.2	Clearances .....	44
14.2.3	Creepage distances .....	44
14.3	Solid insulation .....	45
14.4	Protection against direct contact .....	46
15	Mechanical strength .....	46
15.1	General .....	46
15.2	Mechanical strength of terminals and current-carrying parts .....	46
15.2.1	General .....	46
15.2.2	Mechanical strength of screw terminals and screwless terminals .....	46
15.2.3	Mechanical strength of flat quick-connect terminations .....	46
15.2.4	Mechanical strength of sockets .....	47
15.2.5	Mechanical strength of alternative termination types .....	47

16	Heat and fire resistance.....	47
16.1	General.....	47
16.2	Glow-wire test.....	47
17	Vibration and shock.....	48
17.1	Vibration.....	48
17.2	Shock.....	48
18	Electromagnetic compatibility (EMC).....	49
18.1	General.....	49
18.2	Immunity.....	49
18.3	Radiated and conducted emission.....	49
19	Cybersecurity for industrial automation and control systems (IACS).....	50
20	Environmental information.....	50
20.1	Environmentally conscious design process.....	50
20.2	Procedure to establish material declaration.....	50
Annex A (informative) Setting accuracy, repeatability and effect of influence calculation.....		51
A.1	General.....	51
A.2	Example of calculation.....	51
Annex B (informative) Risk assessment.....		52
B.1	General.....	52
B.2	Risk assessment procedure.....	52
B.3	Achieving tolerable risk.....	53
B.4	Application of risk assessment procedures (proposal for the user).....	57
Annex C (normative) Tests for EMC.....		58
C.1	General.....	58
C.2	EMC immunity.....	58
C.2.1	General.....	58
C.2.2	Performance criteria.....	58
C.3	EMC radiated and conducted emission.....	62
C.3.1	General.....	62
C.3.2	Conducted radio-frequency emission tests.....	62
C.3.3	Radiated radio-frequency emission tests.....	62
Bibliography.....		63
Figure 1 – Definition of ports.....		13
Figure 2 – Power ON-delay relay.....		15
Figure 3 – Power OFF-delay relay.....		15
Figure 4 – OFF-delay relay with control signal.....		16
Figure 5 – ON- and OFF-delay relay with control signal.....		16
Figure 6 – Flasher relay.....		17
Figure 7 – Star-delta relay.....		18
Figure 8 – Summation time relay.....		18
Figure 9 – Pulse delayed relay.....		19
Figure 10 – Pulse delayed relay with control signal.....		19
Figure 11 – Interval relay.....		20
Figure 12 – Interval relay with control signal.....		20

Figure 13 – Retriggerable interval relay with control signal ON .....	21
Figure 14 – Retriggerable interval relay with control signal OFF .....	21
Figure 15 – Maintained time relay .....	22
Figure 16 – Test circuit electromechanical output, conditional short-circuit current .....	42
Figure 17 – Test circuit solid state output, conditional short-circuit current.....	42
Figure B.1 – Iterative process of risk assessment and risk reduction.....	53
Figure B.2 – Risk reduction.....	55
Figure B.3 – Example of the time relay circuit block diagram.....	56
Table 1 – Influence quantities and reference values.....	23
Table 2 – Preferred values of endurance .....	25
Table 3 – Preferred values of maximum permissible operating frequency.....	25
Table 4 – Recommended final values of the setting range.....	27
Table 5 – Type testing .....	28
Table 6 – Routine testing .....	29
Table 7 – Required time relay or coupling relay information .....	29
Table 8 – Thermal classification.....	32
Table 9 – Cross-sectional areas and lengths of conductors dependent on the current carried by the terminal .....	34
Table 10 – Maximum steady state current dependent on the connector size .....	34
Table 11 – Temperature rise limits of accessible parts.....	35
Table 12 – Changing of influencing quantities.....	37
Table 13 – Impulse test for basic insulation .....	39
Table 14 – Dielectric test voltage for basic insulation for devices suitable for use in single-phase three- or two-wire AC and DC systems.....	39
Table 15 – Dielectric test voltage for basic insulation for devices suitable for use in three-phase four or three-wire AC systems .....	40
Table 16 – Minimum clearances for basic insulation.....	44
Table 17 – Minimum clearances in controlled overvoltage conditions .....	44
Table 18 – Minimum creepage distances for basic insulation .....	45
Table A.1 – Calculation formulae .....	51
Table B.1 – Examples of the relation between failure mode, consequences and hazard.....	56
Table B.2 – Severity of harm.....	57
Table B.3 – Probability of harm.....	57
Table B.4 – Risk category .....	57
Table C.1 – Environmental conditions influencing EMC.....	58
Table C.2 – Immunity tests for industrial environments .....	60
Table C.3 – Immunity tests for residential, commercial and light-industrial environments .....	61
Table C.4 – Terminal disturbance voltage limits for conducted radio-frequency emission (for power port) .....	62
Table C.5 – Radiated emission test limits.....	62

# INTERNATIONAL ELECTROTECHNICAL COMMISSION

## TIME RELAYS AND COUPLING RELAYS FOR INDUSTRIAL AND RESIDENTIAL USE –

### Part 1: Requirements and tests

#### FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61812-1 has been prepared by IEC technical committee 94: Electrical relays. It is an International Standard.

This third edition cancels and replaces the second edition published in 2011. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) update of references;
- b) addition of requirements for risk assessment;
- c) addition of requirements for routine test;
- d) renumbering of clauses to bring them into a more logical order;
- e) clarification of the requirement for shock;
- f) addition of cybersecurity requirements for industrial automation and control systems;



- g) addition of environmentally conscious design requirement;
- h) addition of common data dictionary reference;
- i) addition of terms and definitions of relay types;
- j) addition of coupling relays in title;
- k) addition of coupling relays in scope.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
94/843/FDIS	94/889/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at [www.iec.ch/members\\_experts/refdocs](http://www.iec.ch/members_experts/refdocs). The main document types developed by IEC are described in greater detail at [www.iec.ch/standardsdev/publications](http://www.iec.ch/standardsdev/publications).

A list of all parts of the IEC 61812 series can be found, under the general title *Time relays and coupling relays for industrial and residential use*, on the IEC website.

Future documents in this series will carry the new general title as cited above. Titles of existing documents in this series will be updated at the time of the next edition.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under [webstore.iec.ch](http://webstore.iec.ch) in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

**IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.**

# TIME RELAYS AND COUPLING RELAYS FOR INDUSTRIAL AND RESIDENTIAL USE –

## Part 1: Requirements and tests

### 1 Scope

This part of IEC 61812 applies to time relays and coupling relays for industrial applications (for example control, automation, signal and industrial equipment) and for automatic electrical controls for use in, on, or in association with equipment for residential and similar use.

The term “relay” as used in this document comprises all types of time relays and coupling relays, other than measuring relays.

NOTE 1 Time relays and coupling relays can be used for industrial application (for example control, automation, signal and industrial equipment) and for automatic electrical controls for use in, on, or in association with equipment for residential and similar use.”

NOTE 2 Measuring relays are handled by the IEC TC95.

This document defines type test and routine test to confirm the service condition. Subclause 3.2 provides definitions for different types of time relays in use in the IEC 61812 series.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-444:2002, *International Electrotechnical Vocabulary (IEV) – Part 444: Elementary relays*

IEC 60050-445:2010, *International Electrotechnical Vocabulary (IEV) – Part 445: Time relays*

IEC 60068-2-2:2007, *Environmental testing – Part 2-2: Tests – Test B: Dry heat*

IEC 60068-2-6:2007, *Environmental testing – Part 2-6: Tests – Test Fc: Vibration (sinusoidal)*

IEC 60068-2-27:2008, *Environmental testing – Part 2-27: Tests – Test Ea and guidance: Shock*

IEC 60085:2007, *Electrical insulation – Thermal evaluation and designation*

IEC 60112:2020, *Method for the determination of the proof and the comparative tracking indices of solid insulating materials*

IEC 60529:1989, *Degrees of protection provided by enclosures (IP Code)*  
IEC 60529:1989/AMD1:1999  
IEC 60529:1989/AMD2:2013

IEC 60664-1:2020, *Insulation coordination for equipment within low-voltage systems – Part 1: Principles, requirements and tests*

IEC 60664-3:2016, *Insulation coordination for equipment within low-voltage systems – Part 3: Use of coating, potting or moulding for protection against pollution*

IEC 60664-4:2005, *Insulation coordination for equipment within low-voltage systems – Part 4: Consideration of high-frequency voltage stress*

IEC 60695-2-11:2021, *Fire hazard testing – Part 2-11: Glowing/hot-wire based test methods – Glow-wire flammability test method for end products (GWEPT)*

IEC 60695-10-2:2014, *Fire hazard testing – Part 10-2: Abnormal heat – Ball pressure test method*

IEC 60947-5-1:2016, *Low-voltage switchgear and controlgear – Part 5-1: Control circuit devices and switching elements – Electromechanical control circuit devices*

IEC 60947-5-4:2002, *Low-voltage switchgear and controlgear – Part 5-4: Control circuit devices and switching elements – Method of assessing the performance of low-energy contacts – Special tests*

IEC 60947-5-4:2002/AMD1:2019

IEC 60999-1:1999, *Connecting devices – Electrical copper conductors – Safety requirements for screw-type and screwless-type clamping units – Part 1: General requirements and particular requirements for clamping units for conductors from 0,2 mm<sup>2</sup> up to 35 mm<sup>2</sup> (included)*

IEC 61000-4-2:2008, *Electromagnetic compatibility (EMC) – Part 4-2: Testing and measurement techniques – Electrostatic discharge immunity test*

IEC 61000-4-3:2020, *Electromagnetic compatibility (EMC) – Part 4-3: Testing and measurement techniques – Radiated, radio-frequency, electromagnetic field immunity test*

[https://standards.iteh.ai/catalog/standards/sist/53361bdd-3add-4f46-b0dc-25001780d995/iec-](https://standards.iteh.ai/catalog/standards/sist/53361bdd-3add-4f46-b0dc-25001780d995/iec-61000-4-3-2020)

IEC 61000-4-4:2012, *Electromagnetic compatibility (EMC) – Part 4-4: Testing and measurement techniques – Electrical fast transient/burst immunity test*

IEC 61000-4-5:2014, *Electromagnetic compatibility (EMC) – Part 4-5: Testing and measurement techniques – Surge immunity test*

IEC 61000-4-5:2014/AMD1:2017

IEC 61000-4-6:2013, *Electromagnetic compatibility (EMC) – Part 4-6: Testing and measurement techniques – Immunity to conducted disturbances, induced by radio-frequency fields*

IEC 61000-4-8:2009, *Electromagnetic compatibility (EMC) – Part 4-8: Testing and measurement techniques – Power frequency magnetic field immunity test*

IEC 61000-4-11:2020, *Electromagnetic compatibility (EMC) – Part 4-11: Testing and measurement techniques – Voltage dips, short interruptions and voltage variations immunity tests for equipment with input current up to 16 A per phase*

IEC 61000-4-34:2005, *Electromagnetic compatibility (EMC) – Part 4-34: Testing and measurement techniques – Voltage dips, short interruptions and voltage variations immunity tests for equipment with mains current more than 16 A per phase*

IEC 61000-4-34:2005/AMD1:2009

IEC 61210:2010, *Connecting devices – Flat quick-connect terminations for electrical copper conductors – Safety requirements*

IEC 61810-1:2015, *Electromechanical elementary relays – Part 1: General and safety requirements*

IEC 61810-1:2015/AMD1:2019

IEC 61984:2008, *Connectors – Safety requirements and tests*

IEC 62314:2022, *Solid-state relays – Safety requirements*

CISPR 11:2015, *Industrial, scientific and medical equipment – Radio-frequency disturbance characteristics – Limits and methods of measurement*

CISPR 11:2015/AMD1:2016

CISPR 11:2015/AMD2:2019

ISO 9223:2012, *Corrosion of metals and alloys – Corrosivity of atmospheres – Classification, determination and estimation*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-444 and IEC 60050-445 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

#### 3.1 Terms and definitions related to general terms

##### 3.1.1 time relay

##### **specified-time relay**

all-or-nothing relay (IEV 444-01-02) with one or more time functions

[SOURCE: IEC 60050-445:2010, 445-01-01, modified – in the definition, the reference to the IEV entry has been added.]

##### 3.1.2

##### **coupling relay**

all-or-nothing electrical relay incorporated into a housing or mounted on a socket (for example IEC 60715 mounting rail) with no specified time or logic function for industrial or residential use intended for incorporation into cabinets.

Note 1 to entry: Typically this is a relay according to the IEC 61810 series or IEC 62314 incorporated into a housing or mounted on a socket (for example IEC 60715 mounting rail) for installation in industrial or residential cabinets.

##### 3.1.3

##### **specified time**

specified characteristic of the time relay at given type of function, for example operate time, release time, pulse on time, interval time

[SOURCE: IEC 60050-445:2010, 445-05-01, modified – the note has been removed.]

##### 3.1.4

##### **setting accuracy**

difference between the measured value of the specified time and the reference value set on the scale

Note 1 to entry: For analogue setting this value relates to the maximum setting value.

[SOURCE: IEC 60050-445:2010, 445-06-07]

### 3.1.5

#### **effect of influence** (on specified time)

degree with which the influence quantity within its nominal range has an effect on the specified time

[SOURCE: IEC 60050-445:2010, 445-06-02]

### 3.1.6

#### **recovery time**

minimum time interval for which the power supply is removed or control signal is applied or removed before the specified function can be performed again

[SOURCE: IEC 60050-445:2010, 445-05-04, modified – “must be removed” and “must be applied” have been replaced by “is removed” and “is applied”, respectively.]

### 3.1.7

#### **minimum control impulse time**

shortest duration of the power supply or control signal to fulfil the specified function

[SOURCE: IEC 60050-445:2010, 445-05-02]

### 3.1.8

#### **repeatability**

difference between the upper and lower limits of the specified confidence range determined from several time measurements of the time relay under identical conditions

Note 1 to entry: Preferably the repeatability is indicated as a percentage of the mean value of all measured values.

[SOURCE: IEC 60050-445:2010, 445-06-08]

### 3.1.9

#### **power supply**

electrical quantity (for example electric current, voltage) which has to be applied or removed from the input circuit of the time relay or coupling relay in order to enable it to fulfil its purpose

[SOURCE: IEC 60050-445:2010, 445-03-01, modified – in the definition, “or coupling relay” has been added.]

### 3.1.10

#### **input voltage**

electrical quantity that can be applied to (or removed from) the power supply, the control signal or both

### 3.1.11

#### **control signal**

DEPRECATED: trigger signal

input signal which has to be applied or removed in addition to the power supply in order to ensure a function of the time relay

Note 1 to entry: The control signal is provided by a separate device designed to close or open an electrical circuit.

[SOURCE: IEC 60050-445:2010, 445-02-05]

**3.1.12****conditional short-circuit current of an output circuit**

prospective electric current that a contact circuit, protected by a specified short-circuit protective device, can satisfactorily withstand for the total breaking time of that protective device under specified conditions of use and behaviour

[SOURCE: IEC 60050-445:2010, 445-04-03]

**3.1.13****on-state voltage drop of a solid-state output circuit**

DEPRECATED: voltage drop of a solid-state output circuit

voltage measured across the effectively conducting solid-state output of the time relay or coupling relay, when carrying the given load current

[SOURCE: IEC 60050-445:2010, 445-04-04, modified – in the definition, “or coupling relay” has been added.]

**3.1.14****leakage current of a solid-state output**

DEPRECATED: off-state current of a solid-state output

electric current which flows through the effectively non-conducting solid-state output of the time relay or coupling relay at a specified voltage

[SOURCE: IEC 60050-445:2010, 445-04-05, modified – in the definition “or coupling relay” has been added.]

**3.1.15****power port**

port at which the supply voltage (either AC or DC) is connected to the time relay or coupling relay

[https://standards.iteh.ai/catalog/standards/sist/53361bdd-3add-4f46-b0dc-25001780d995/iec-](https://standards.iteh.ai/catalog/standards/sist/53361bdd-3add-4f46-b0dc-25001780d995/iec-61812-1-2023)

[SOURCE: IEC 60050-445:2010, 445-07-01, modified – in the definition “or coupling relay” has been added.]

**3.1.16****control port**

additional port for the starting of functions whilst supply voltage is applied, or for the connection of a remote potentiometer, control signal, etc.

Note 1 to entry: There are control ports for floating (potential-free) and non-floating control.

[SOURCE: IEC 60050-445:2010, 445-07-02]

**3.1.17****output port**

port at which a load is connected to the time relay or coupling relay


Note 1 to entry: The output port could consist of electromechanical contacts or be a solid-state output.

[SOURCE: IEC 60050-445:2010, 445-07-03, modified – in the definition “or coupling relay” has been added.]

**3.1.18****enclosure port**

physical boundary of the time relay or coupling relay through which electromagnetic fields can radiate or impinge

Note 1 to entry: See Figure 1.

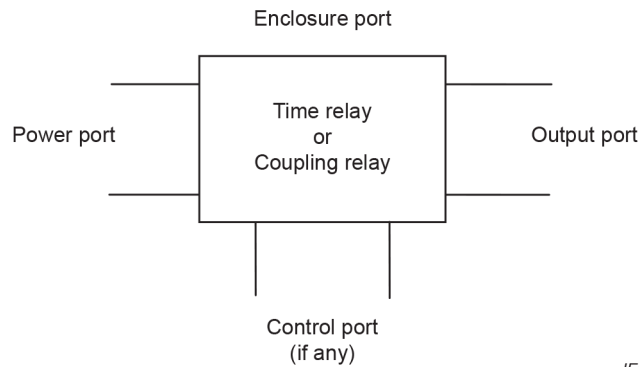

**Figure 1 – Definition of ports**

[SOURCE: IEC 60050-445:2010, 445-07-04, modified – in the definition “or coupling relay” and the note and reference to Figure 1 have been added.]

### 3.1.19

#### **type test**

test of one or more devices made to a certain design to show that the design meets certain specifications

[SOURCE: IEC 61810-1:2015, 3.1.7]

### 3.1.20

#### **routine test**

test to which each individual device is subjected during and/or after manufacture to ascertain whether it complies with certain criteria

[SOURCE: IEC 61810-1:2015, 3.1.8]

### 3.1.21

#### **sampling test**

test on a number of devices taken at random from a batch

[SOURCE: IEC 61810-1:2015, 3.1.9]

### 3.1.22

#### **operative range**

range of values of power supply for which the time relay or coupling relay is able to perform its specified function

[SOURCE: IEC 61810-1:2015, 3.4.5, modified – in the definition, “coil voltage” has been replaced with “power supply”, and “relay” has been replaced with “time relay or coupling relay”.]

### 3.1.23

#### **rated input voltage range**

range of input voltages used for specification purposes, established for a specified set of operating conditions

### 3.1.24

#### **functional insulation**

insulation between conductive parts which is necessary only for the proper functioning of the equipment

[SOURCE: IEC 60050-195:2021, 195-02-41, modified – “necessary” has been replaced with “which is necessary only”.]