

CONSOLIDATED VERSION

VERSION CONSOLIDÉE



Flexible insulating sleeving –
Part 3: Specifications for individual types of sleeving – Sheet 283: Heat-shrinkable, polyolefin sleeving for bus-bar insulation

Gaines isolantes souples –
Partie 3: Spécifications pour types particuliers de gaines – Feuille 283: Gaines thermorétractables en polyoléfine pour isolation de barre omnibus

<https://standards.iteh.ai/cstdng/standards/ics/1f8310ca-8c5f-4710-9ecc-10b4be447a70/iec-60684-3-283-2010>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2013 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Liens utiles:

Recherche de publications CEI - www.iec.ch/searchpub

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,...).

Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

CONSOLIDATED VERSION

VERSION CONSOLIDÉE



Flexible insulating sleeving –
Part 3: Specifications for individual types of sleeving – Sheet 283: Heat-shrinkable, polyolefin sleeving for bus-bar insulation

Gaines isolantes souples –
Partie 3: Spécifications pour types particuliers de gaines – Feuille 283: Gaines thermorétractables en polyoléfine pour isolation de barre omnibus

<https://standards.iteh.ai/cstd/gs/standards/ics/11f310ca-8c5f-4710-9ecc-10b4be447a70/iec-60684-3-283-2010>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 29.035.20

ISBN 978-2-8322-1310-0

Warning! Make sure that you obtained this publication from an authorized distributor.

Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

Withdrawn

iTech Standards
(<https://standards.itech.ai>)

Document Preview

<https://standards.itech.ai/cstd/pg/standards/lcs/11f310ca-8c5f-4710-9ecc-10b4be447a70/iec-60684-3-283-2010>

[IEC 60684-3-283:2010](https://standards.itech.ai/cstd/pg/standards/lcs/11f310ca-8c5f-4710-9ecc-10b4be447a70/iec-60684-3-283-2010)

REDLINE VERSION

VERSION REDLINE



Flexible insulating sleeving –
Part 3: Specifications for individual types of sleeving – Sheet 283: Heat-shrinkable, polyolefin sleeving for bus-bar insulation

Gaines isolantes souples –
Partie 3: Spécifications pour types particuliers de gaines – Feuille 283: Gaines thermorétractables en polyoléfine pour isolation de barre omnibus

<https://standards.iteh.ai/cstdng/standards/ics/1f8310ca-8c5f-4710-9ecc-10b4be447a70/iec-60684-3-283-2010>

CONTENTS

FOREWORD.....	3
INTRODUCTION.....	5
INTRODUCTION TO THE AMENDMENT	6
1 Scope.....	7
2 Normative references	7
3 Designation	8
4 Conditions of test	8
5 Requirements	8
6 Sleeving conformance	8
Annex A (informative) Guidance to the available sizes and wall thicknesses.....	12
Table 1 – Property requirements	9
Table 2 – Requirements for dielectric strength	10
Table 3 – Resistance to selected fluids	10
Table 4 – Additional property requirements	11
Table A.1 – Type A, medium wall.....	12
Table A.2 – Type B, thick wall.....	12

<https://standards.iteh.ai/cstd/ing/standards/iec/1f8310ca-8c5f-4710-9ecc-10b4be447a70/iec-60684-3-283-2010>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FLEXIBLE INSULATING SLEEVING –**Part 3: Specifications for individual types of sleeving –
Sheet 283: Heat-shrinkable, polyolefin sleeving for bus-bar insulation****FOREWORD**

- 1) The International Electro-technical Commission (IEC) is a worldwide organization for standardization comprising all national electro-technical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
<https://www.iec.ch/60684-3-283:2010> 10b4be447a70/iec-60684-3-283-2010
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This Consolidated version of IEC 60684-3-283 bears the edition number 1.1. It consists of the first edition (2010) [documents 15/597/FDIS and 15/605/RVD] and its amendment 1 (2013) [documents 15/687/CDV and 15/704/RVC]. The technical content is identical to the base edition and its amendment.

In this Redline version, a vertical line in the margin shows where the technical content is modified by amendment 1. Additions and deletions are displayed in red, with deletions being struck through. A separate Final version with all changes accepted is available in this publication.

This publication has been prepared for user convenience.

International Standard IEC 60684-3-283 has been prepared by IEC technical committee 15: Solid electrical insulating materials.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all the parts in the IEC 60684 series, under the general title *Flexible insulating sleeving*, can be found on the IEC website.

The committee has decided that the contents of the base publication and its amendment will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The “colour inside” logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this publication using a colour printer.

<https://standards.iteh.ai/cstd/p/g/standards/iec/1f8310ca-8c5f-4710-9ecc-10b4be447a70/iec-60684-3-283-2010>

INTRODUCTION


This International Standard is one of a series which deals with flexible insulating sleeving for electrical purposes.

The series consists of three parts:

- Part 1: Definitions and general requirements (IEC 60684-1)
- Part 2: Methods of test (IEC 60684-2)
- Part 3: Specifications for individual types of sleeving (IEC 60684-3)

This standard comprises one of the sheets of Part 3:

Sheet 283: Heat-shrinkable, polyolefin sleeving for bus-bar insulation.

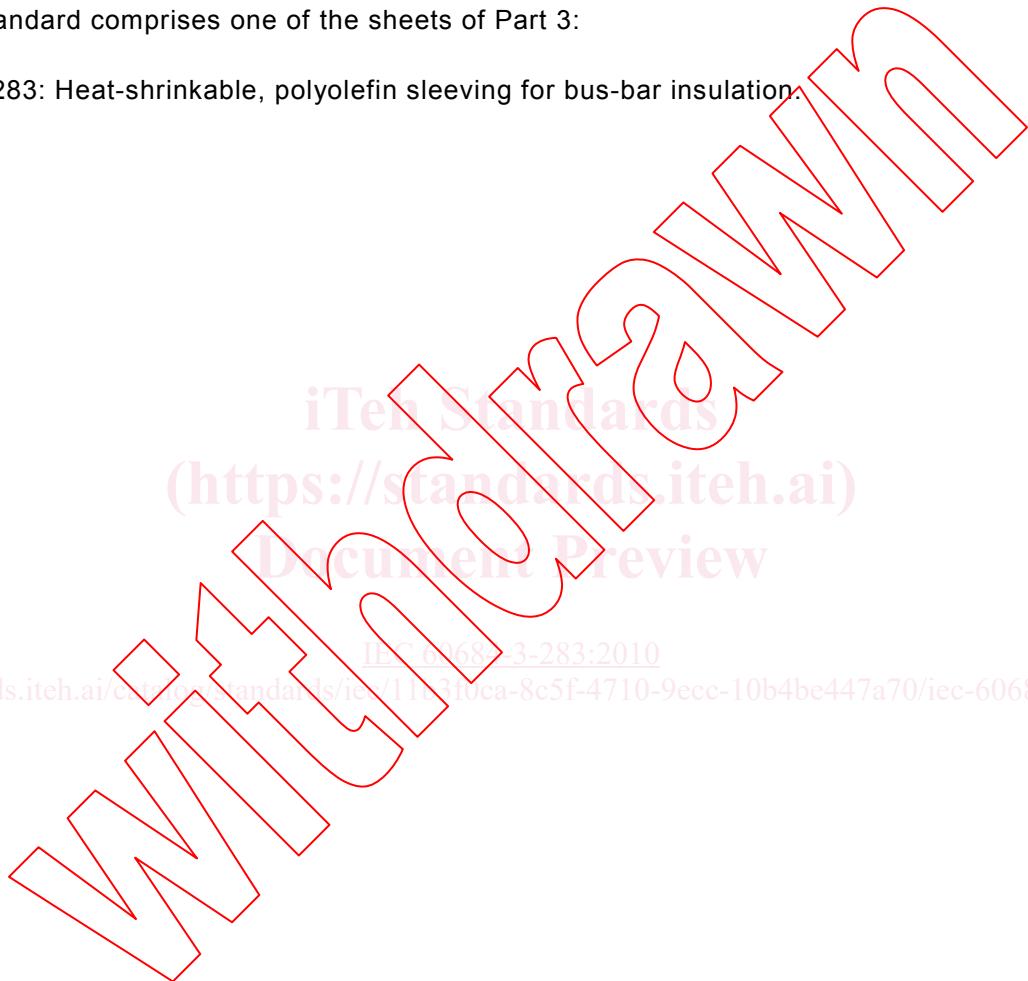

INTRODUCTION TO THE AMENDMENT

This amendment changes the test method for resistance to weathering since it is quoted incorrectly as ISO 4892-3 method 1 .This method does not exist in the 2006 edition of ISO 4892-3. Also after consulting with users of these types of sleeveings it was decided that a period of 3 000 hours exposure to this method was adequate.



FLEXIBLE INSULATING SLEEVING –

Part 3: Specifications for individual types of sleeving – Sheet 283: Heat-shrinkable, polyolefin sleeving for bus-bar insulation

1 Scope

This part of IEC 60684 gives the requirements for two types of heat-shrinkable, polyolefin sleeving for bus-bar insulation, with a nominal shrink ratio of 2,5:1.

This sleeving has been found suitable up to temperatures of 100 °C.

- Type A : Medium wall Internal diameter up to 170,0 mm typically
- Type B : Thick wall Internal diameter up to 165,0 mm typically

These sleeveings are normally supplied in colour, red or brown.

Since these types of sleeveings cover a significantly large range of sizes and wall thicknesses, Tables A.1 and A.2 provide guidance to the range of sizes available. The actual size and wall thickness shall be agreed between the user and supplier depending on the electric strength of the installed tubing offered and the requirements of the user.

Materials which conform to this specification meet established levels of performance. However, the selection of a material by a user for a specific application should be based on the actual requirements necessary for adequate performance in that application and not based on this specification alone.

2 Normative references

[IEC 60684-3-283:2010](https://standards.iec.ch/IEC%2060684-3-283:2010)

<https://standards.iec.ch/codes/standards/iec/1f8310ca-8c5f-4710-9ecc-10b4be447a70/iec-60684-3-283-2010>

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60296:2003, *Fluids for electrotechnical applications – Unused mineral insulating oils for transformers and switchgear*

IEC 60684-1:2003, *Flexible insulating sleeving – Part 1: Definitions and general requirements*

IEC 60684-2:1997, *Flexible insulating sleeving – Part 2: Methods of test*

Amendment 1 (2003)

Amendment 2 (2005)

IEC 60757:1983, *Code for designation of colours*

ISO 846:1997, *Plastics – Evaluation of the action of microorganisms*

ISO 4892-3:2006, *Plastics – Methods of exposure to laboratory light sources – Part 3: Fluorescent UV lamps*

3 Designation

The sleeving shall be identified by the following designation:

Description	IEC publication number	IEC part number	IEC sheet number	Type	Size (expanded and recovered internal diameter in millimetres)	Colour	Table 4 ^a code
Sleeving	IEC 60684	- 3	-283	A	- 75,0/30,0	-Red	X

^a The addition of "X" at the end of the designation indicates that the properties contained in Table 4 have been agreed upon between the user and the supplier.

Any colour abbreviation shall comply with IEC 60757, where applicable. Non-standard colours shall be written out in full.

NOTE This is for package labelling only in accordance with IEC 60684-1.

4 Conditions of test

Unless otherwise specified, the sleeving shall be shrunk in a forced air circulation oven for (10 ± 1) min at $200^{\circ}\text{C} \pm 3\text{ K}$ prior to testing.

5 Requirements

In addition to the general requirements given in IEC 60684-1, the sleeving shall comply with the requirements of Tables 1, 2, 3, and 4 where applicable.

6 Sleeving conformance

[IEC 60684-3-283:2010](https://standards.iteh.ai/iec-60684-3-283:2010)

<https://standards.iteh.ai/cstdng/standards/ics/1f8310ca-8c5f-4710-9ecc-10b4be447a70/iec-60684-3-283-2010>

Conformance to the requirements of this specification shall normally be based on the results from typical sizes.

- Type A : Recovered ID 25 mm - 30 mm
- Type B : Recovered ID 25 mm - 40 mm

Table 1 – Property requirements

Property	IEC 60684-2 clause or subclause	Units	Max. or min.	Requirements	Remarks
Dimensions – Internal diameter – Wall thickness – Concentricity – expanded – recovered	3 3.1.2 3.3.2 3.3.3	mm mm %	Min. Min.	To be agreed between the purchaser and the supplier 60 85	
Heat shock Tensile strength Elongation at break	6 19.1 and 19.2 19.1 and 19.2	MPa %	Min. Min.	5 200	Heat at 150 °C ± 5 K
Longitudinal change	9	%	Max.	-10 +5	
Bending at low temperature	14	–	–	No cracking shall be visible.	Test at -40 °C For strips, the mandrel shall be between 20 and 22 times the wall thickness. Full section sleeving is tested unfilled and the mandrel shall be between 20 and 22 times the outer diameter.
Dimensional stability on storage	16	–	–	The dimensions shall remain as agreed.	See Scope.
Tensile strength Elongation at break	19.1 and 19.2 19.1 and 19.2	MPa %	Min. Min.	8 400	Use a jaw separation rate of 100 mm/min.
Secant modulus at 2 % elongation	19.4	MPa	Max.	160	
Dielectric strength	21	kW/mm	Min.	See Table 2.	
Volume resistivity at room temperature	23 23.4.2	Ω·m	Min.	10 ¹¹	
Flame propagation	26 Method C	s/mm	Max. Max.	60 100	Burning includes flaming and glowing
Corrosion resistance Elongation	32 19.1 and 19.2	%	Min.	No chemical interaction	Heat at 150 °C ± 3 K
Resistance to selected fluids Tensile strength Elongation at break	36 19.1 and 19.2 19.1 and 19.2	MPa %	Min. Min.	5 200	Use the fluids and test temperatures specified in Table 3. Immersion (24 ± 1)h
Heat ageing Tensile strength Elongation at break	39 19.1 and 19.2 19.1 and 19.2	MPa %	Min. Min.	5 200	Heat at 150 °C ± 3 K
Long term ageing Elongation at break	50 19.2	%	Min.	150	The ageing temperature shall be 100 °C ± 3 K.

Table 2 – Requirements for dielectric strength

Expanded wall thickness mm	Dielectric strength ^a Min.	
	Expanded ID Types A+B All sizes	Dielectric strength kV/mm 12
All dimensions		
^a Measure the expanded wall thickness and calculate the electric strength by dividing the breakdown voltage by this value.		
NOTE Care should be taken on selection of sizes based on these values. Refer to the manufacturer for actual values on installed conditions.		

The breakdown voltage shall be determined by the method described in 21 of IEC 60684-2. All values shall comply with the minimum value in this table.

The sleeving shall be tested in the expanded condition.

The rate of application of the voltage shall be 500 V/s.

Table 3 – Resistance to selected fluids

Test fluid No.	Fluids	Type	Standard or symbol	Immersion temperature °C ± 2 K
1	Insulating oil	Mineral based	IEC 60296	23
2	Cleaning fluid	Solvent	Isopropyl alcohol	23
3	-	Water	De-ionized	85

Other fluids and/or temperatures may be specified for customers with specific needs. These additional fluids and/or temperatures shall be applicable when incorporated into agreements between the supplier and the customer.