



**Environmental Engineering (EE);  
Methodology for environmental Life Cycle Assessment (LCA)  
of Information and Communication Technology (ICT)  
goods, networks and services**

**Document Preview**

[ETSIES 203 199 V1.4.1 \(2024-11\)](#)

<https://standards.iteh.ai/catalog/standards/etsi/6f78757e-0bea-4ead-ba07-af811d0467ea/etsi-es-203-199-v1-4-1-2024-11>

---

Reference

RES/EE-EEPS57

---

Keywords

LCA

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

***Important notice***

The present document can be downloaded from the  
[ETSI Search & Browse Standards application](#).

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver repository](#).

Users should be aware that the present document may be revised or have its status changed,  
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to  
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our  
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

<https://standards.iteh.ai/catalog/standards/etsi/6f78757c-0bea-4cad-ba07-af811d0467ea/etsi-es-203-199-v1-4-1-2024-11>

***Notice of disclaimer & limitation of liability***

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

***Copyright Notification***

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.  
All rights reserved.

# Contents

Intellectual Property Rights .....	7
Foreword.....	7
Modal verbs terminology.....	7
Introduction .....	7
1    Scope .....	11
2    References .....	12
2.1    Normative references .....	12
2.2    Informative references.....	12
3    Definition of terms, symbols and abbreviations.....	14
3.1    Terms.....	14
3.2    Symbols.....	20
3.3    Abbreviations .....	20
4    Void.....	22
Part I: ICT life cycle assessment - framework and guidance .....	23
5    General description.....	23
5.1    General description of an LCA.....	23
5.2    Compliance to the present document.....	24
5.3    Comparisons of results .....	24
5.4    Relationship between methodologies of LCAs for ICT goods, networks and services.....	25
6    Methodological framework .....	25
6.1    General requirements .....	25
6.1.1    Life cycle stages .....	25
6.1.2    ICT goods with multiple life cycles.....	27
6.1.3    The goods, networks and services Product System .....	27
6.1.3.0    Introduction.....	27
6.1.3.1    ICT goods.....	27
6.1.3.2    ICT networks.....	27
6.1.3.3    ICT services .....	28
6.1.4    Handling of software .....	28
6.1.4.1    General .....	28
6.1.4.2    Assessment of software .....	28
6.1.5    Operating lifetime .....	29
6.2    Goal and scope definition .....	29
6.2.1    Goal and scope of the study .....	29
6.2.2    Functional unit .....	30
6.2.2.1    General .....	30
6.2.2.2    ICT goods.....	31
6.2.2.3    ICT networks.....	32
6.2.2.4    ICT services .....	33
6.2.3    System boundaries .....	33
6.2.3.1    General .....	33
6.2.3.2    The use of unit processes .....	36
6.2.3.3    ICT goods.....	36
6.2.3.3.1    General .....	36
6.2.3.3.2    Goods Raw materials acquisition .....	37
6.2.3.3.3    Production .....	37
6.2.3.3.4    Use.....	39
6.2.3.3.5    End-of-life treatment (EoLT) .....	40
6.2.3.3.6    ICT goods and processes for extended operating lifetime.....	41
6.2.3.4    ICT Networks.....	42
6.2.3.5    ICT Services.....	42
6.2.3.5.1    General .....	42

6.2.3.5.2	Eight items to consider .....	43
6.2.4	Cut-off rules.....	45
6.2.5	Data quality requirements .....	45
6.2.5.1	General.....	45
6.2.5.2	Specific requirements on data and data sources .....	46
6.3	Life Cycle Inventory (LCI) .....	48
6.3.1	Data collection .....	48
6.3.1.1	General.....	48
6.3.1.2	ICT goods.....	49
6.3.1.2.0	Introduction .....	49
6.3.1.2.1	Use stage energy consumption of ICT goods .....	49
6.3.1.2.2	ICT goods data for other life cycle stages .....	50
6.3.1.2.3	Consideration of Energy mixes .....	50
6.3.1.2.4	Handling of LCI results for electricity and energy .....	50
6.3.1.3	ICT networks.....	51
6.3.1.4	ICT services .....	51
6.3.2	Data calculation .....	51
6.3.2.1	General.....	51
6.3.2.2	ICT goods.....	51
6.3.2.3	ICT networks.....	52
6.3.2.4	ICT services .....	52
6.3.3	Allocation procedure/Allocation of data.....	52
6.3.3.1	General.....	52
6.3.3.2	Allocation rules for generic processes.....	53
6.3.3.3	Allocation rules for allocation of support activities between projects/product systems.....	53
6.3.3.4	Allocation rules for facility data.....	53
6.3.3.5	Allocation rules for transports.....	53
6.3.3.6	Allocation rules for recycling.....	53
6.3.3.7	ICT goods.....	54
6.3.3.8	ICT networks.....	54
6.3.3.9	ICT services .....	54
7	Life Cycle Impact Assessment (LCIA) .....	56
7.1	Introduction to LCIA.....	56
7.2	Impact categories.....	56
8	Life cycle interpretation .....	59
8.1	General .....	59
8.2	Uncertainty analysis .....	59
8.3	Sensitivity analysis .....	59
9	Reporting .....	59
9.1	General .....	59
9.2	ICT goods .....	61
9.2.1	Total results .....	61
9.2.2	System boundaries .....	63
9.2.2.1	Life cycle stages, unit processes and generic processes.....	63
9.2.2.2	Raw material acquisition.....	63
9.2.2.3	Production .....	64
9.2.2.4	Use .....	64
9.2.2.4.1	ICT goods use.....	64
9.2.2.4.2	Support goods use.....	64
9.2.2.5	EoLT .....	64
9.2.3	LCI results .....	64
9.3	ICT Network .....	64
9.3.1	Example reporting .....	64
9.3.2	Total results .....	65
9.4	ICT services.....	67
9.4.1	Example reporting .....	67
9.4.2	Total results .....	68
10	Critical review .....	70

Part II: .....	Comparative analysis/LCA between ICT and reference product system (baseline scenario): framework and guidance .....	71
11	General description of comparative analysis.....	71
11.1	Need for comparative analysis .....	71
11.2	Target systems for comparative analysis.....	72
11.3	Principles of comparisons between systems (comparative analysis).....	72
11.3.1	First case: comparison between a reference product system (non-ICT) and an ICT good, network or service product system.....	72
11.3.2	Second case: comparison between two ICT goods or two ICT networks or two ICT services .....	73
11.3.3	Common principles.....	73
11.4	Procedures of comparisons between systems (comparative analysis).....	74
12	Methodological framework of comparative analysis .....	74
12.1	General requirements .....	74
12.2	Goal and scope definition.....	74
12.2.0	Introduction.....	74
12.2.1	Functional unit .....	75
12.2.2	System boundaries .....	75
12.2.3	Cut-off .....	75
12.2.3.1	General .....	75
12.2.3.2	Identification of life cycle stages and items important for comparison.....	75
12.2.4	Allocation .....	75
12.2.5	Data quality requirements .....	76
12.3	Life cycle inventory.....	76
12.4	Life cycle impact assessment .....	76
12.5	Life cycle interpretation .....	76
12.5.1	General.....	76
12.5.2	Sensitivity analysis .....	77
12.5.3	Uncertainty analysis.....	77
13	Reporting.....	77
14	Critical review .....	78
<b>Annex A (normative):</b>	<b>Details regarding the handling of software .....</b>	<b>79</b>
<b>Annex B (normative):</b>	<b>Modelling of unit processes .....</b>	<b>81</b>
<b>Annex C (normative):</b>	<b>Support activities .....</b>	<b>83</b>
<b>Annex D (normative):</b>	<b>Generic processes .....</b>	<b>84</b>
<b>Annex E (normative):</b>	<b>Part types of ICT goods.....</b>	<b>86</b>
<b>Annex F (normative):</b>	<b>EoLT processes .....</b>	<b>89</b>
<b>Annex G (normative):</b>	<b>Elementary flows (emissions and resources) .....</b>	<b>90</b>
<b>Annex H (normative):</b>	<b>List of Raw materials.....</b>	<b>93</b>
<b>Annex I:</b>	<b>Void .....</b>	<b>95</b>
<b>Annex J (normative):</b>	<b>ICT network overview.....</b>	<b>96</b>
<b>Annex K (normative):</b>	<b>A method for assessing the environmental load of the working environment.....</b>	<b>98</b>
K.0	Introduction to environmental load of the working environment.....	98
K.1	Purpose of targeting the working environment in the assessment of ICT goods, networks and services .....	98
K.2	Functional unit.....	98
K.3	System boundary .....	98

K.4	Life Cycle Inventory (LCI) .....	99
K.4.1	Data collection.....	99
K.4.2	Data calculation.....	99
K.4.3	Allocation procedure .....	100
<b>Annex L (normative):</b>	<b>Reporting formats.....</b>	<b>101</b>
<b>Annex M (informative):</b>	<b>Examples of Allocation Procedures.....</b>	<b>108</b>
M.1	Allocation examples for Recycling of Materials.....	108
M.1.1	Introduction .....	108
M.1.2	Example of the 100/0 and 0/100 methods .....	108
M.1.3	Example of the 50/50, 20/80 and 80/20 methods .....	109
<b>Annex N (informative):</b>	<b>Life cycle stages overview.....</b>	<b>111</b>
<b>Annex O (informative):</b>	<b>Examples of goods and black box modules.....</b>	<b>112</b>
O.0	Introduction to examples of goods and black box modules .....	112
O.1	End-user goods .....	112
O.2	CPE.....	112
O.3	Network site goods (from base station sites to data centres).....	112
O.4	Examples of ICT specific black box modules.....	113
O.5	Site support goods .....	113
<b>Annex P (informative):</b>	<b>Examples of Networks and Network goods .....</b>	<b>114</b>
<b>Annex Q (informative):</b>	<b>Energy mix .....</b>	<b>115</b>
<b>Annex R (informative):</b>	<b>Example of data quality indicators .....</b>	<b>116</b>
<b>Annex S (informative):</b>	<b>Uncertainties of life cycle assessments for ICT goods, networks and services .....</b>	<b>118</b>
<b>Annex T (informative):</b>	<b>Opportunities and limitations in the use of LCAs for ICT goods, networks and services.....</b>	<b>120</b>
<b>Annex U (informative):</b>	<b>Examples for calculating second order effects .....</b>	<b>122</b>
<b>Annex V (informative):</b>	<b>GWP values 100 year time frame (informative) .....</b>	<b>125</b>
<b>Annex W (informative):</b>	<b>Summary of requirements .....</b>	<b>126</b>
<b>Annex X (informative):</b>	<b>The relation between LCA and Circular Economy for ICT .....</b>	<b>138</b>
<b>Annex Y (informative):</b>	<b>Application scenarios for LCA of ICT goods with extended operating lifetime and multiple life cycles.....</b>	<b>139</b>
Y.1	Introduction .....	139
Y.2	LCA covering cradle-to-grave of a ICT goods with extended operating lifetime.....	139
Y.3	LCA of first life cycle of a ICT goods with multiple life cycles.....	139
Y.4	LCA of second life cycle of a ICT goods with multiple life cycles .....	140
Y.5	Comparative LCA of a ICT goods with extended operating lifetime .....	140
<b>Annex Z (informative):</b>	<b>Example analysis of different refurbishment configurations .....</b>	<b>141</b>
<b>Annex AA (informative):</b>	<b>Bibliography .....</b>	<b>143</b>
History .....		144

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™, PLUGTESTS™, UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™, LTE™** and **5G logo** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the **GSM** logo are trademarks registered and owned by the GSM Association.

---

## Foreword

This final draft ETSI Standard (ES) has been produced by ETSI Technical Committee Environmental Engineering (EE), and is now submitted for the ETSI Membership Approval Procedure.

The present document was developed jointly by ETSI TC EE and ITU-T Study Group 5. It will be published

respectively by ITU and ETSI as Recommendation ITU-T L.1410 [i.28] and ETSI Standard ETSI ES 203 199 (the present document), which are technically-equivalent.

---

## Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

---

## Introduction

The present document has been developed to complement ISO 14040 [1] and ISO 14044 [2] for the environmental assessment of the life cycle impact of ICT goods, networks and services.

The present document defines a set of requirements to reflect the quality that LCA practitioners should strive for. At this stage some of the requirements put forward here are considered as challenging due to Life Cycle Assessment (LCA) tool limitations, a lack of data, limitations in data granularity, etc. It is thus recognized that compliance to all requirements in the present document may not be possible at the time the present document is published. However, to foster results of LCAs becoming more transparent and, for the quality of data and LCA tools to improve over time, the present document is defining the requirements outlined in the following pages. The present document requires that deviation(s) from the requirements are clearly motivated and reported. For further details regarding compliance refer to clause 5.2.

The development of Information and Communication Technologies (ICTs) has led to concerns regarding its environmental impact. Taking into consideration the ongoing efforts within the United Nations Framework Convention on Climate Change [b-UNFCCC] to combat climate change, ITU-T and ETSI decided to enhance their previous work by jointly developing an internationally agreed methodology to help the ICT sector to assess the environmental impact of ICT goods, networks and services. The present document also gives guidance to the assessment of software.

Unlike many products and services sold in the world today, ICT distinguishes itself by its double-edged nature. On the one hand, ICTs have an environmental impact at each stage of its life cycle, e.g. from energy and natural resource consumption to e-waste. On the other hand, ICTs can enable vast efficiencies in lifestyle and in all sectors of the economy by the provision of digital solutions that can improve energy efficiency, inventory management and business efficiency by reducing travel and transportation, e.g. tele-working and video conferencing and by substituting physical products for digital information, e.g. e-commerce.

These different levels of impact are acknowledged in some academic literature as the three order effects of ICTs:

- First order effects (or the environmental load of ICTs): the impacts created by the physical existence of ICTs and the processes involved, e.g. energy consumption and GHG emissions, e-waste, use of hazardous substances and use of scarce, non-renewable resources.
- Second order effects (or the environmental load reduction achieved by ICTs): the impacts and opportunities created by the use and application of ICTs. This includes environmental load reduction effects which can be either actual or potential, such as travel substitution, transportation optimization, working environment changes, use of environmental control systems, use of e-business, e-government, etc.


Higher order effects:

- particularly include, for some ICT services such as tele-working or video conferencing, the time gained by an end user using an ICT service which then may cause additional impact e.g. a leisurely drive and economic activities, which are difficult to track. Such additional impacts are often defined as "rebound effects".

Most of the benefits of ICTs lie in the second order effects via increased efficiency, transparency, speed of transactions, rapid market-clearing, long-tail effects and so on. There are environmental impacts associated with the first order: environmental impact of ICT goods, networks and services such as resource consumption and carbon emissions during manufacturing and the disposal of hardware. Thus, the present document focuses on the first and second order effects.

Recommendation ITU-T L.1480 [i.25] provides further guidance on the second order effects and higher order effects as well as the impacts and opportunities created by the aggregated effects on societal structural changes by using ICTs.

In constructing a sustainable society from an environmental viewpoint, the negative aspects of ICTs should be minimized and the positive ones should be maximized, as summarized in Figure 1.

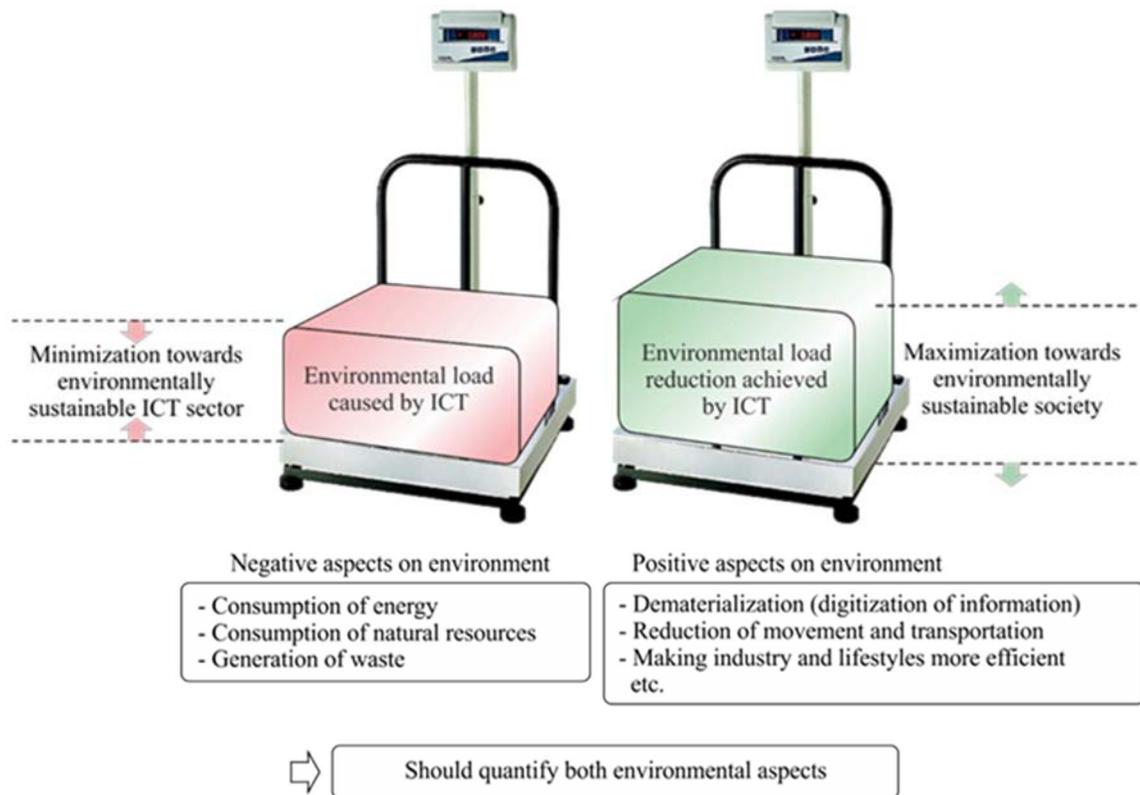

**Figure 1: Schematic model for the environmental assessment of ICT goods, networks and services**

The first order effect (or environmental load caused by ICT) can be quantified by performing a Life Cycle Assessment (LCA). The second order effect (or environmental load reduction achieved by ICT) can be quantified by the comparison of LCA results between the ICT goods, networks and services product system and the reference product system performing the same function.


To reflect the first two order effects, the present document describes environmental assessments through Life Cycle Assessment (LCA) which is a systematic analytical method and model by which the potential environmental effects related to ICT goods, Networks and Services can be estimated. The present document also gives guidance to the assessment of software. LCAs have a cradle-to-grave scope where the life cycle stages, i.e. *raw material acquisition, production, use and end-of-life* are included. Transports and energy supply are moreover included in each life-cycle stage.

ISO has standardized the LCA methodology. In the present document, ICT specific additions to the ISO 14040 [1] and ISO 14044 [2] standards will be described. As addition to the ISO 14040 [1] and ISO 14044 [2] standards, the European Commission has published a handbook that gives detailed guidance on all the steps required to conduct an LCA [i.16]. This handbook will also be referred to with special ICT considerations in mind.

The present document is divided into two parts:

- Part I (clauses 5 to 10) - ICT life cycle assessment: framework and guidance. This part deals with the LCA methodology applied to ICT goods, networks and services.
- Part II (clauses 11 to 14) - Comparative analysis between an ICT product system and a reference product system (baseline scenario): framework and guidance. This part deals with comparative analysis based on LCA results of the ICT goods, networks and services product system and the reference product system.

The structure of this LCA methodology specification for ICT goods, Networks and Services is shown in Figure 2. Figure 2 indicates where specific requirements and considerations apply for ICT goods, networks and services respectively and where the same requirements and considerations apply for all of those product systems.

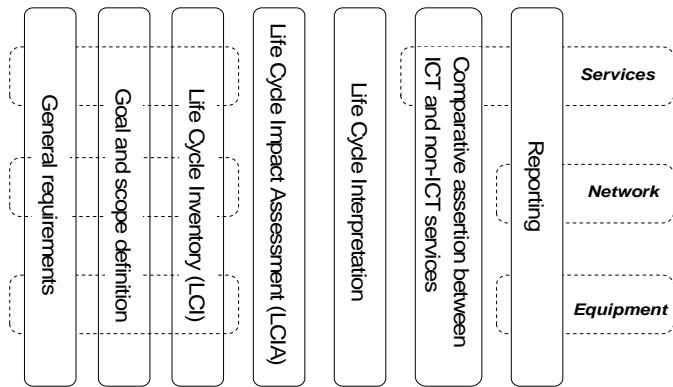

**Figure 2: Structure of LCA methodology specification for ICT goods, Networks and Services**

The structure of part I and part II is based on ISO 14040 [1] and ISO 14044 [2] in order to support the LCA practitioner and thus each part is structured in accordance with:

- General requirements: high level requirements of assessment.
- Goal and scope definition: requirements of the functional unit, system boundaries and data quality.
- Life Cycle Inventory (LCI): requirements for data collection, calculation and allocation.
- Life Cycle Impact Assessment (LCIA): requirements for impact assessment.
- Life cycle interpretation: requirements for the interpretation of results and calculation of second order effects.
- Reporting: requirements for reporting.

Both parts are then divided into applicable clauses and Part I is additionally structured into the three product system types, i.e. ICT goods, networks and services as appropriate.

The present document is intended for LCA practitioners wanting to assess ICT goods, networks and services impacts and it will help them to perform and report their LCAs of *ICT goods, Networks and Services* in a uniform and transparent manner. It is possible to use the present document to get guidance on what to consider in an LCA on three levels: ICT goods, Networks and Services.

The following uses of ICT LCA applications are the most frequently used ones, but others may be identified and used as well:

- Evaluation of product system environmental impact, such as climate change.
- Assessment of primary energy consumption.
- Identification of life cycle stages and activities with high significance.
- Comparisons of specific ICT goods, Networks, or Services under the conditions described in clause 5.3 (Comparisons of results).
- Comparative analysis between an ICT product system and reference product system.

NOTE: The LCA practitioner is advised to check ITU-T Recommendations giving guidance on simplified LCA methods, when relevant.

---

## 1 Scope

The present document aims to provide a methodology for evaluating the environmental impact of ICTs objectively and transparently and is based upon the Life Cycle Assessment (LCA) methodology standardized in ISO 14040 [1] and ISO 14044 [2].

The present document can be read by anyone aiming for a better understanding of the specific conditions and requirements applicable to the LCA of ICT goods, networks and services. However, the present document is especially intended for LCA practitioners with a prior knowledge of LCA standards, i.e. ISO 14040 [1] and ISO 14044 [2].

The purpose of the present document is to:

- provide ICT-specific requirements, in addition to those of ISO 14040 [1] and ISO 14044 [2], to ensure a sufficient quality of LCA studies of ICT goods, networks and services; increase the quality of the LCA by adding ICT specific requirements to those of ISO 14040 [1] and ISO 14044 [2];
- harmonize the LCAs of ICT goods, Networks and Services;
- increase the credibility of LCAs of ICT goods, networks and services;
- increase the transparency and facilitate the interpretation of LCA studies of ICT goods, networks and services;
- facilitate the communication of LCA studies of ICT goods, networks and services; and
- provide a methodology for telecommunication operators and service providers to assess the environmental load of one or more Services carried by their ICT Networks.

While recognizing ISO 14040 [1] and ISO 14044 [2], including Annex A of ISO 14040 [1] "Application of LCA", as normative references, the present document will give generic and specific requirements for the LCA of ICT goods, networks and services. The present document is valid for all types of ICT goods including end-user goods and also for ICT networks and services. The present document also gives guidance to the assessment of software. LCA practitioners are encouraged to also consider other environmental aspects in accordance with ISO 14040 [1] and ISO 14044 [2].

The present document defines a set of requirements which reflect the quality that LCA practitioners should strive for. At this stage some of the requirements put forward here are considered as challenging due to LCA tool limitations, a lack of data, limitations in data granularity, etc. It is thus recognized that compliance to all requirements in the present document may not be possible at the time the present document is published. However, to foster results of LCAs becoming more transparent and, for the quality of data and LCA tools to improve over time, the present document defines the requirements outlined in the following pages. The present document requires that deviation(s) from the requirements are clearly motivated and reported. For further details regarding compliance refer to clause 5.2.

Comparisons of results from environmental assessments of ICT goods, networks and services, assessments which have been performed by different organizations are beyond the scope of the present document, as such comparisons would require that the assumptions and context of each study are exactly equivalent.

## 2 References

### 2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] [ISO 14040:2006](#): "Environmental management -- Life cycle assessment -- Principles and framework".
- [2] [ISO 14044:2006](#): "Environmental management -- Life cycle assessment -- Requirements and guidelines".

### 2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] [https://standards.iteh.ai/catalogue/ETSI\\_TS\\_102\\_706\\_V1.3.1](https://standards.iteh.ai/catalogue/ETSI_TS_102_706_V1.3.1): ETSI TS 102 706 (V1.3.1): "Environmental Engineering (EE); Measurement method for energy efficiency of wireless access network equipment".
- [i.2] Void.
- [i.3] European Commission - Joint Research Centre - Institute for Environment and Sustainability [JRC4211](#): "International Reference Life Cycle Data System (ILCD) Handbook - Framework and Requirements for Life Cycle Impact Assessment Models and Indicators". First edition March 2010. EUR 24586 EN. Luxembourg. Publications Office of the European Union; 2010.
- [i.4] ETSI ES 202 336-1: "Environmental Engineering (EE); Monitoring and Control Interface for Infrastructure Equipment (Power, Cooling and Building Environment Systems used in Telecommunication Networks) Part 1: Generic Interface".
- [i.5] Recommendation ITU-T L.1310 (09/2020): "Energy efficiency metrics and measurement methods for telecommunication equipment".
- [i.6] [EUR 24708 EN \(2010\)](#): "International Reference Life Cycle Data (ILCD) System Handbook: General guide for Life Cycle Assessment - Detailed guidance, 1st edition., European Commission Joint Research Centre".
- [i.7] [European Commission - Joint Research Centre EUR 25167 \[b-EUR 25167 EN\]](#): "Characterisation factors of the ILCD Recommended Life Cycle Impact Assessment methods" EN - 2012 (20/02/2013 updated).
- [i.8] Green House Gas Protocol Corporate Standard, 2006.

- [i.9] ISO 14046 (2013): "Environmental management -- Water footprint -- Principles, requirements and guidelines".
- [i.10] IPCC (2013): "Climate Change 2013: The Physical Science Basis. Clause 8 Anthropogenic and Natural Radiative Forcing, Appendix 8. A: Lifetimes, Radiative Efficiencies and Metric Values", Table 8.A.1 p 731-738.
- [i.11] Void.
- [i.12] Void.
- [i.13] Recommendation ITU-T L.1023 (2023): Assessment method for circular scoring.
- [i.14] André, H., Söderman, M. L., & Nordelöf, A. (2019). Resource and environmental impacts of using second-hand laptop computers: A case study of commercial reuse. *Waste Management*, 88, 268-279.
- [i.15] Bracquené, E., Lindemann, J., & Duflou, J. (2022). Implementation of circularity indicators in a household product manufacturing company. *Procedia CIRP*, 105, 660-665.
- [i.16] [Document C\(2021\)9332](#) Commission Recommendation on the use of the Environmental Footprint methods to measure and communicate the life cycle environmental performance of products and organisations C/2021/9332 final.
- [i.17] Void.
- [i.18] Prakash, S., Köhler, A., Liu, R., Stobbe, L., Proske, M., & Schischke, K. (2016, September). Paradigm shift in Green IT-extending the life-times of computers in the public authorities in Germany. In *2016 Electronics Goes Green 2016+(EGG)* (pp. 1-7). IEEE.
- [i.19] Proske, M., Clemm, C., & Richter, N. (2016). Life cycle assessment of the Fairphone 2. *Fraunhofer IZM*.
- [i.20] Walzberg, J., Lonca, G., Hanes, R. J., Eberle, A. L., Carpenter, A., & Heath, G. A. (2021). Do we need a new sustainability assessment method for the circular economy? A critical literature review. *Frontiers in Sustainability*, 1, 620047.
- [i.21] Zink, T., Maker, F., Geyer, R., Amirtharajah, R., & Akella, V. (2014). Comparative life cycle assessment of smartphone reuse: repurposing vs. refurbishment. *The International Journal of Life Cycle Assessment*, 19, 1099-1109.
- [i.22] ETSI TR 104 080: "Environmental Engineering (EE); Example of a Life Cycle Assessment (LCA) of a mobile phone".
- [i.23] TR 45550:2020: "Definitions related to material efficiency" (produced by CEN/CENELEC).
- [i.24] ETSI EN 303 808: "Environmental Engineering (EE); Applicability of EN 45552 to EN 45559 methods for assessment of material efficiency aspects of ICT network infrastructure goods in the context of circular economy".
- [i.25] Recommendation ITU-T L.1480: "Enabling the Net Zero transition: Assessing how the use of information and communication technology solutions impact greenhouse gas emissions of other sectors".
- [i.26] Recommendation ITU-T L.1022: "Circular economy: Definitions and concepts for material efficiency for information and communication technology".
- [i.27] Recommendation ITU-T L.1440: "Methodology for environmental impact assessment of information and communication technologies at city level".
- [i.28] Recommendation ITU-T L.1410: "Methodology for environmental life cycle assessments of information and communication technology goods, networks and services".
- [i.29] [x-ADEME](#): "Evaluation de l'impact environnemental d'un ensemble de produits reconditionnés", September 2022.

[i.30] ETSI EN 305 174-5-1: "Access, Terminals, Transmission and Multiplexing (ATTM); Broadband Deployment and Lifecycle Resource Management; Part 5: Customer network infrastructures; Sub-part 1: Homes (single-tenant)".

## 3 Definition of terms, symbols and abbreviations

### 3.1 Terms

For the purposes of the present document, the following terms apply:

**active area:** area of the display or touch panel which is useful for touch or viewing

**activity data:** quantitative measure of a level of activity that results in GHG emissions

NOTE: See Green House Gas Protocol Corporate Standard [i.8], clause 2.2.

**black box module:** device, system or object which can be viewed solely in terms of its input, output and transfer characteristics without any knowledge of its internal workings

NOTE: In this context the black box module may consist of several part categories such as integrated circuits, mechanics, cables, etc., e.g. a power module on a PCBA.

**CO<sub>2</sub> equivalent (CO<sub>2</sub> e):** universal unit of measurement to indicate the Global Warming Potential (GWP) of each of the seven greenhouse gases, expressed in terms of the GWP of one unit of carbon dioxide.

NOTE 1: It is used to evaluate releasing (or avoiding releasing) different greenhouse gases against a common basis

NOTE 2: See Green House Gas Protocol Corporate Standard [i.8], clause 2.2.

**commercial lifetime:** length of time that a good is owned for before a new one is bought to replace it (often used to estimate the lifetime for consumer products)

**comparative assertion:** See ISO 14040 [1], clause 3.6.

**comparative analysis:** analysis aiming to compare two different product systems based on the same functional unit

**cradle-to-gate:** partial life cycle of ICT goods or parts, from material acquisition through to when they leave the factory gate (e.g. immediately following the production)

NOTE 1: This definition has been amended from GHG Protocol Product Standard.

NOTE 2: E.g. ICT goods ready to be put on the market/sales with no need for further processing.

**Customer Premises Equipment (CPE):** any device, either provided by a telecommunications service provider or owned directly by the customer, installed at customer premises and adopted for using the telecommunication services, typically provided by means of a fixed access network (but not necessarily excluding wireless access)

NOTE: See ETSI EN 305 174-5-1 [i.30].

**cut-off:** amount of energy or material flow or the level of environmental significance associated with unit processes or product system excluded from the study

NOTE: Unit processes excluded from the studied product system in an LCA.

**data gap:** LCI flows excluded from a unit process within the studied product system

**depreciation time:** time during which a (new) revenue-generating asset reaches its residual economic value

NOTE: The depreciation time is sometimes referred to as the legal lifetime.

**Economic Input-Output (EIO) approach:** method using tables, called Input-Output (IO) tables, that describe financial transactions between economic sectors in a national economy, to approximate environmental impacts