



Designation: ~~D4255/D4255M—15a~~ D4255/D4255M – 20

Standard Test Method for In-Plane Shear Properties of Polymer Matrix Composite Materials by the Rail Shear Method¹

This standard is issued under the fixed designation D4255/D4255M; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reappraisal. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reappraisal.

This standard has been approved for use by agencies of the U.S. Department of Defense.

1. Scope

1.1 This test method determines the in-plane shear properties of high-modulus fiber-reinforced composite materials by either of two procedures. In Procedure A, laminates clamped between two pairs of loading rails are tested. When loaded in tension, the rails introduce shear forces in the specimen. In Procedure B, laminates clamped on opposite edges with a tensile or compressive force applied to a third pair of rails in the center are tested.

1.2 Application of this test method is limited to continuous-fiber or discontinuous-fiber-reinforced polymer matrix composites in the following material forms:

1.2.1 Laminates composed only of unidirectional fibrous laminae, with the fiber direction oriented either parallel or perpendicular to the fixture rails.

1.2.2 Laminates composed only of woven fabric filamentary laminae with the warp direction oriented either parallel or perpendicular to the fixture rails.

1.2.3 Laminates of balanced and symmetric construction, with the 0° direction oriented either parallel or perpendicular to the fixture rails.

1.2.4 Short-fiber-reinforced composites with a majority of the fibers being randomly distributed.

NOTE 1—Additional test methods for determining in-plane shear properties of polymer matrix composites may be found in Test Methods [D3518/D3518M](#), [D5379/D5379M](#), [D5448/D5448M](#), and [D7078/D7078M](#).

1.3 The reproducibility of this test method can be affected by the presence of shear stress gradients in the gage section and stress concentrations at the gripping areas. Test Methods [D5379/D5379M](#) and [D7078/D7078M](#) provide superior shear response in comparison to this test method, as their specimen configurations produce a relatively pure and uniform shear stress state in the gage section.

1.4 The technical content of this standard has been stable since 2001 without significant objection from its stakeholders. As there is limited technical support for the maintenance of this standard, changes since that date have been limited to items required to

¹ This test method is under the jurisdiction of ASTM Committee [D30](#) on Composite Materials and is the direct responsibility of Subcommittee [D30.04](#) on Lamina and Laminate Test Methods.

Current edition approved May 15, 2015; Oct. 1, 2020. Published May 2015; October 2020. Originally approved in 1983. Last previous edition approved in 2015 as [D4255/D4255M—15](#); [D4255/D4255M – 15a](#). DOI: [10.1520/D4255-D4255M-15A](#); [10.1520/D4255-D4255M-20](#).

retain consistency with other ASTM D30 Committee standards, including editorial changes and incorporation of updated guidance on micrometers and calipers, strain gage requirements, speed of testing, specimen preconditioning and environmental testing. Future maintenance of the standard will only be in response to specific requests and performed only as technical support allows.

1.5 *Units*—The values stated in either SI units or inch-pound units are to be regarded separately as standard. The values stated in each system are not necessarily exact equivalents; therefore, to ensure conformance with the standard, each system must shall be used independently of the other. ~~Combining~~ other, and values from the two systems may result in nonconformance with the standard shall not be combined.

1.5.1 Within the text the inch-pounds units are shown in brackets.

1.6 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety safety, health, and health environmental practices and determine the applicability of regulatory limitations prior to use.*

1.7 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

2.1 ASTM Standards:²

- D792 Test Methods for Density and Specific Gravity (Relative Density) of Plastics by Displacement
- D883 Terminology Relating to Plastics
- D2584 Test Method for Ignition Loss of Cured Reinforced Resins
- D2734 Test Methods for Void Content of Reinforced Plastics
- D3171 Test Methods for Constituent Content of Composite Materials
- D3518/D3518M Test Method for In-Plane Shear Response of Polymer Matrix Composite Materials by Tensile Test of a $\pm 45^\circ$ Laminate
- D3878 Terminology for Composite Materials
- D5229/D5229M Test Method for Moisture Absorption Properties and Equilibrium Conditioning of Polymer Matrix Composite Materials
- D5379/D5379M Test Method for Shear Properties of Composite Materials by the V-Notched Beam Method
- D5448/D5448M Test Method for Inplane Shear Properties of Hoop Wound Polymer Matrix Composite Cylinders
- D7078/D7078M Test Method for Shear Properties of Composite Materials by V-Notched Rail Shear Method
- E4 Practices for Force Verification of Testing Machines
- E6 Terminology Relating to Methods of Mechanical Testing
- E111 Test Method for Young's Modulus, Tangent Modulus, and Chord Modulus
- E122 Practice for Calculating Sample Size to Estimate, With Specified Precision, the Average for a Characteristic of a Lot or Process
- E177 Practice for Use of the Terms Precision and Bias in ASTM Test Methods
- E251 Test Methods for Performance Characteristics of Metallic Bonded Resistance Strain Gages
- E456 Terminology Relating to Quality and Statistics
- E1237 Guide for Installing Bonded Resistance Strain Gages
- ~~E1309 Guide for Identification of Fiber-Reinforced Polymer Matrix Composite Materials in Databases (Withdrawn 2015)³~~
- ~~E1434 Guide for Recording Mechanical Test Data of Fiber-Reinforced Composite Materials in Databases (Withdrawn 2015)³~~
- ~~E1471 Guide for Identification of Fibers, Fillers, and Core Materials in Computerized Material Property Databases (Withdrawn 2015)³~~

2.2 ASTM Adjunct:

- Adjunct No. ADJD4255, Rail Shear Fixtures Machining Drawings³

3. Terminology

3.1 Terminology D3878 defines terms relating to high-modulus fibers and their composites. Terminology D883 defines terms

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

³ A copy of the detailed drawing for the construction of the fixtures shown in Figs. 1 and 2 is available at a nominal cost from ASTM Headquarters. Request Adjunct No. ADJD4255.

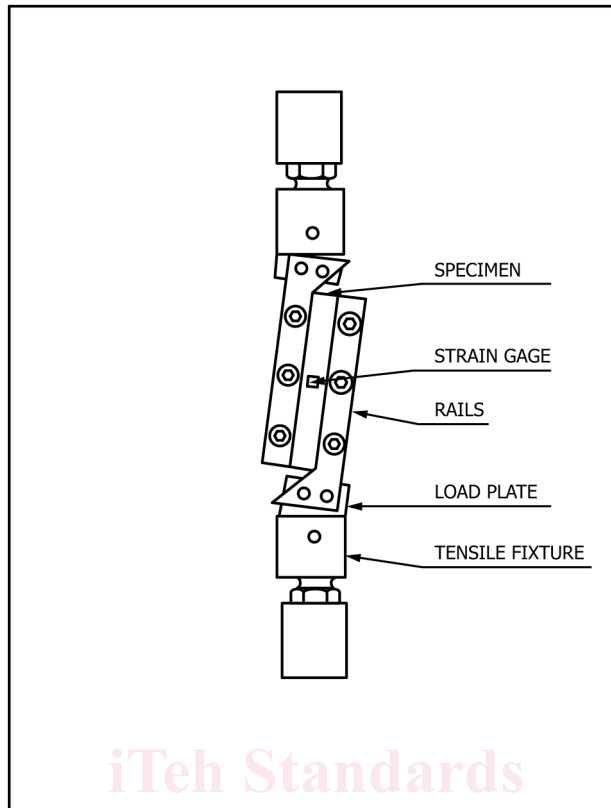


FIG. 1 Procedure A Assembly Rail Shear Apparatus

relating to plastics. Terminology E6 defines terms relating to mechanical testing. Terminology E456 and Practice E177 define terms relating to statistics. In the event of a conflict between terms, Terminology D3878 shall have precedence over the other terminology standards.

ASTM D4255/D4255M-20

NOTE 2—If the term represents a physical quantity, its analytical dimensions are stated immediately following the term (or letter symbol) in fundamental dimension form, using the following ASTM standard symbology for fundamental dimensions, shown within square brackets: [M] for mass, [L] for length, [T] for time, [θ] for thermodynamic temperature, and [nd] for nondimensional quantities. Use of these symbols is restricted to analytical dimensions when used with square brackets, as the symbols may have other definitions when used without the brackets.

3.2 Definitions of Terms Specific to This Standard:

3.2.1 *in-plane shear*, *n*—shear associated with shear forces applied to the edges of the laminate so that the resulting shear deformations occur in the plane of the laminate rather than through the thickness.

3.2.2 *offset shear stress* [M/(LT²)], *n*—the shear stress associated with an offset of the shear chord modulus of elasticity line along the strain axis (see 13.5).

3.2.3 *shear strength* [M/(LT²)], *n*—the shear stress carried by a material at failure under a pure shear condition.

3.2.4 *transition region*, *n*—a strain region of a stress-strain or strain-strain curve over which a significant change in the slope of the curve occurs within a small strain range.

3.2.4.1 Discussion—

Many filamentary composite materials exhibit a nonlinear response during loading, such as seen in plots of either longitudinal stress versus longitudinal strain or transverse strain versus longitudinal strain. In certain cases, the nonlinear response may be conveniently approximated by a bilinear fit. There are several physical reasons for the existence of a transition region. Common examples include matrix cracking under tensile loading and ply delamination.

3.2.5 *traveler*, *n*—a small piece of the same material as, and processed similarly to, the test specimen, used for example to measure moisture content as a result of conditioning. This is also sometimes termed as a reference sample.

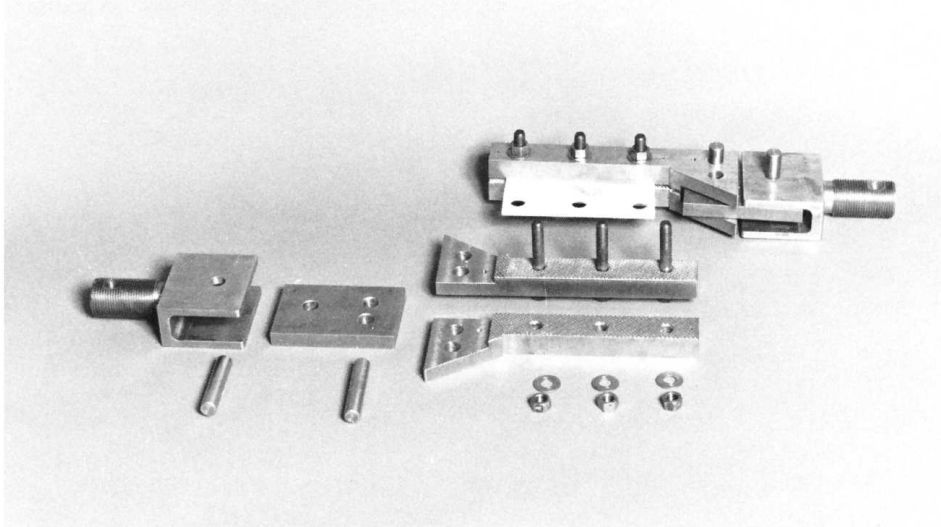


FIG. 2 Procedure A Partially Assembled Typical Test Fixture

3.3 Symbols:

A = cross-sectional area of test specimen

B_y = percent bending of specimen

CV = coefficient of variation statistic of a sample population for a given property, %

F_{12}^o = offset shear stress, the value of the shear stress at the intersection of the stress-strain plot with a line passing through the offset strain value at zero stress and with a slope equal to the shear chord modulus of elasticity

F^u = ultimate shear stress

G = shear modulus of elasticity

h = specimen thickness

l = specimen length, the dimension parallel to the rails in the gage section

n = number of specimens

P_i = force carried by test specimen at i th data point

P^{max} = force carried by a test specimen that is the lesser of (1) the maximum force before failure, (2) the force at 5 % engineering shear strain, or (3) the force at the bending limit (see 11.8.1)

S_{n-1} = sample standard deviation

x_i = measured or derived property for an individual specimen from the sample population

\bar{x} = sample mean (average)

γ = engineering shear strain

ϵ = indicated normal strain from strain transducer

$\mu\epsilon = 10^{-6}$ m/m (10^{-6} in./in.)

τ_i = shear stress at i th data point

4. Summary of Test Method

4.1 *Procedure A: Two-Rail Shear Test*—A flat panel with holes along opposing edges is clamped, usually by through bolts, between two pairs of parallel steel loading rails; see Figs. 1 and 2. When loaded in tension, this fixture introduces shear forces in the specimen that produce failures across the panel. This test method is typical but not the only configuration usable. The two-rail shear fixtures can also be compression loaded. The force may be applied to failure.

4.1.1 If force-strain data are required, the specimen may be instrumented with strain gages. Biaxial strain gage rosettes are installed at corresponding locations on each face of the specimen.

4.2 *Procedure B: Three-Rail Shear Test*—A flat panel, clamped securely between pairs of rails on opposite edges and in its center, is loaded by supporting the side rails while loading the center rails. See Figs. 3-5. A force on the center rail of either tension or compression produces a shear force in each section of the specimen. The force may be applied to failure.

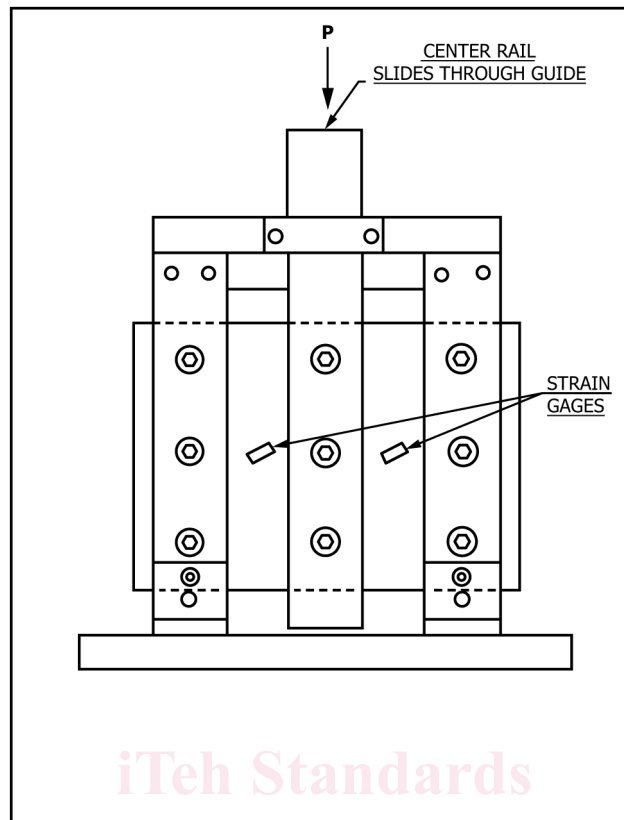


FIG. 3 Procedure B Assembly Rail Shear Fixture

4.2.1 The test fixture consists of three pairs of parallel rails usually bolted to the test specimen by through bolts. The two outside pairs of rails are attached to a base plate which rests on the test machine. A third pair (middle rails) is guided through a slot in the top of the base fixture. The unit is normally loaded in compression. It is also permissible to load the middle rails in tension, but this requires attaching the base fixture to the test machine.

4.2.2 If force-strain data are required, the specimen may be instrumented with strain gages. Biaxial strain gages are to be installed at corresponding locations on opposite faces of the specimen.

4.3 Detailed fixture drawings are available as ASTM Adjunct No. [ADJD4255](#).

5. Significance and Use


5.1 These shear tests are designed to produce in-plane shear property data for material specifications, research and development, and design. Factors that influence the shear response and should therefore be reported include: material, methods of material preparation and lay-up, specimen stacking sequence, specimen preparation, specimen conditioning, environment of testing, specimen alignment and gripping, speed of testing, time at temperature, void content, and fiber volume reinforcement content. Properties that may be measured by this test method include:

5.1.1 In-plane shear stress versus engineering shear strain response,

5.1.2 In-plane shear chord modulus of elasticity,

5.1.3 Offset shear stress, and

5.1.4 Maximum in-plane shear stress. In cases in which the engineering shear strain at failure is greater than 5 %, the shear stress corresponding to 5 % engineering shear strain should be reported.

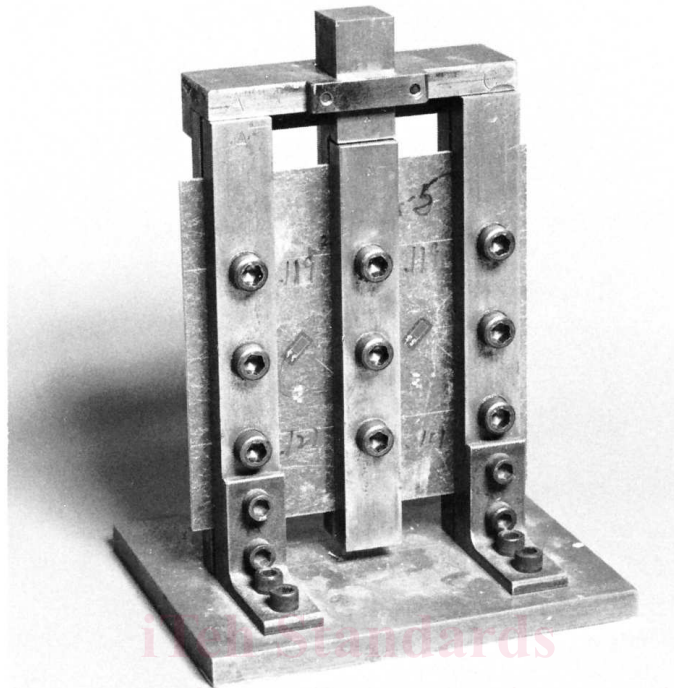

(<https://standards.iteh.ai>)
Document Preview

FIG. 4 Procedure B Assembled Typical Test Fixture

[ASTM D4255/D4255M-20](https://standards.iteh.ai/catalog/standards/sist/91cf420a-d95f-47d6-8f10-3d4204d253ac/astm-d4255-d4255m-20)

<https://standards.iteh.ai/catalog/standards/sist/91cf420a-d95f-47d6-8f10-3d4204d253ac/astm-d4255-d4255m-20>

6. Interferences

6.1 There are no standard test methods capable of producing a perfectly pure and uniform shear stress condition to failure for every material, although some test methods can come acceptably close for a specific material for a given engineering purpose. The off-axis force of the two-rail method introduces a comparatively small tensile force in the panel.

6.2 *Material and Specimen Preparation*—Poor material fabrication practices, lack of control of fiber alignment, and damage induced by improper specimen machining are known causes of high material data scatter in composites.

6.3 *Determination of Failure*—Rail shear specimens, especially thin ones, can buckle during force application. Buckling can be detected by measuring surface strains on opposite faces of the specimens with biaxial strain gages. Data measured with the specimen in a buckled state are not representative of the material shear properties. Modulus data must be checked to confirm that buckling has not occurred in the modulus measurement range. Strength measurements must be checked to confirm that shear strength has not been influenced by specimen buckling. Failure by buckling should not be interpreted as indicating the maximum shear strength.

6.3.1 Ply delamination is another possible failure mode for laminates containing a large number of 45° plies. This failure reflects instability of 45° plies loaded in compression as contrasted to the overall buckling failure previously described. Differences in strain gage readings will not be noticeable, but the failure can be identified by delaminated plies in contrast to fiber breakage.⁴

⁴ Hussain, A. K. Hussain, K., and Adams, D. F. Adams, "The Wyoming-Modified Two-Rail Shear Test Fixture for Composite Materials," *Journal of Composites Technology and Research*, Vol 21, No. 4, October 1999, pp. 215-223.

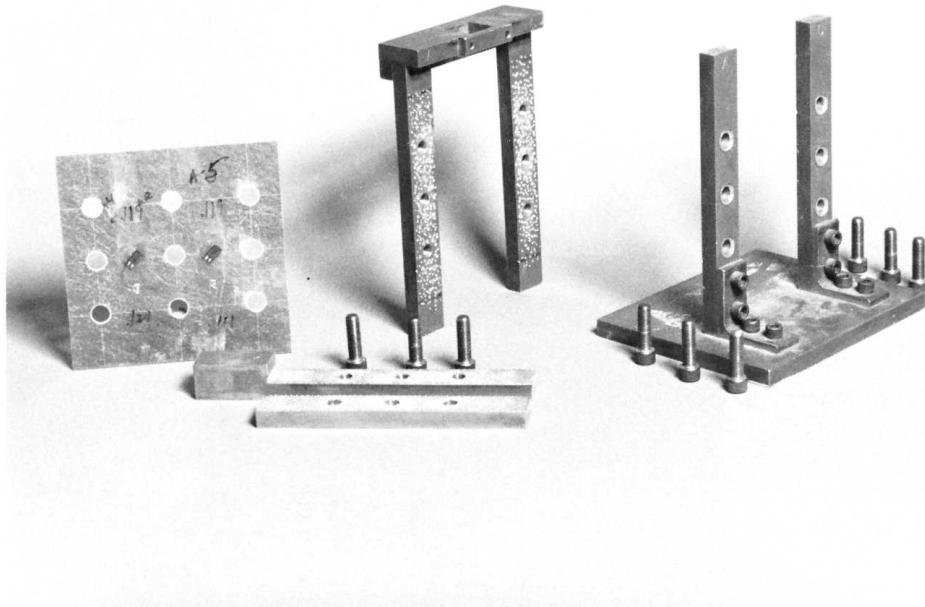


FIG. 5 Procedure B Disassembled Typical Test Fixture

6.4 *Gripping*—Failure through bolt holes indicates inadequate gripping. Alternate gripping methods are discussed in 7.2.3.

6.5 *End Effects*—This test method assumes a state of pure shear throughout the length of the specimen gage section. However, the gage section ends have zero shear stress because no traction and no constraints are applied there. A stress transition region exists between the ends and interior portions of the gage section. The length of this transition region determines the error induced in the material shear data.

7. Apparatus

7.1 *Micrometers and Calipers*—A micrometer with a 4 to 7 mm [0.16 to 0.28 in.] nominal diameter ball interface or a flat anvil interface shall be used to measure the specimen thickness. A ball interface is recommended for thickness measurements when at least one surface is irregular (e.g., for example, a course peel ply surface, which is neither smooth nor flat). A micrometer or caliper with a flat anvil interface shall be used for measuring length, width, and other machined surface dimensions. The use of alternative measurement devices is permitted if specified (or agreed to) by the test requestor and reported by the testing laboratory. The accuracy of the instrument(s) shall be suitable for reading to within 1 % of the specimen dimensions. For typical specimen geometries, an instrument with an accuracy of ± 0.0025 mm [± 0.0001 in.] is adequate for thickness measurements, while an instrument with an accuracy of ± 0.025 mm [± 0.001 in.] is adequate for measurement of length, width, and other machined surface dimensions.

7.2 Rail Shear Fixtures

7.2.1 *Two-Rail Shear*—A two-rail shear fixture is shown in Figs. 1 and 2. Detailed fixture drawings are available as ASTM Adjunct No. ADJD4255. The test fixture consists of two pairs of rails which can clamp the test specimen with through bolts. The rails are then attached to the test machine through pins, a load plate that also aligns the rails with each other, and a clevis that connects directly to the test machine. This equipment is typical but not the only configuration usable. The two-rail shear fixture can be compression loaded. Also see 7.2.3 for rail modifications.

7.2.2 *Three-Rail Shear*—A three-rail shear fixture is shown in Figs. 3-5. Detailed fixture drawings are available as ASTM Adjunct ADJD4255. The test fixture consists of three pairs of rails that clamp the test specimen with through bolts. The two outside pairs of rails are attached to a base plate that rests on the test machine. The third (middle) pair of rails are guided through a slot in the

top of the base fixture. The unit shown is loaded in compression. The middle rails can be tensile loaded, which requires fastening the base fixture to the test machine. This equipment is typical but not the only configuration that is usable. Also see 7.2.3 for rail modifications.

7.2.3 Rail Modifications—The following list is not inclusive but is typical of methods used by various laboratories to meet the requirements of specific materials. Techniques that work for one material may be unacceptable for another. If these modifications are to be used as part of a specification, the rail grip system shall be completely specified and these modifications noted in the test report. These modifications have been used to grip the following specimens:

- 7.2.3.1 Abrasive paper or cloth bonded to the rails,
- 7.2.3.2 Machining V grooves in the rails,
- 7.2.3.3 Center punching rails in a random pattern,
- 7.2.3.4 Changing the number of bolt holes from three up to eight per rail and using smaller holes,
- 7.2.3.5 Soft metal shims,
- 7.2.3.6 Tabbing specimens in rail areas, and
- 7.2.3.7 Thermal spray surfaces.

7.3 Testing Machine—The testing machine shall conform with Practices E4 and shall satisfy these requirements:

7.3.1 Testing Machine Heads—The testing machine shall have two loading heads with at least one movable head along the testing axis.

7.3.2 Platens/Adapter—One of the testing machine heads shall be capable of being attached to the lower half of the two-rail shear test fixture (described in 7.2.1) or of supporting the base of the three-rail fixture (described in 7.2.2) using an adapter or platen interface as required. The other head shall be capable of being attached to the upper half of the fixture or of loading the center rail of the fixture. If required, one of the interfaces may be capable of relieving minor misalignments between heads, such as with a universal or a hemispherical ball joint.

7.3.3 Drive Mechanism—The testing machine drive mechanism shall be capable of imparting to the movable head a controlled displacement rate with respect to the stationary head. The displacement of the movable head shall be capable of regulation as specified in 11.3.

7.3.4 Force Indicator—The testing machine force-sensing device shall be capable of indicating the total force applied to the test specimen. This device shall be essentially free from response lag at the specified testing rate and shall indicate the force with an accuracy over the force range(s) of interest of within $\pm 1\%$ of the indicated value, as specified by Practices E4. The force range(s) of interest may be fairly low for modulus evaluation or much higher for strength evaluation, or both, as required.

NOTE 3—Obtaining precision force data over a large range of interest in the same test, such as when both elastic modulus and maximum force are being determined, places extreme requirements on the load cell and its calibration. For some equipment, a special calibration may be required. For some combinations of material and load cell, simultaneous precision measurement of both elastic modulus and maximum strength may not be possible, and measurement of modulus and strength may have to be performed in separate tests using a different load cell range for each test.

7.4 Strain-Indicating Device—Bonded resistance strain gages shall be used to measure strain. The number and position of strain gages shall be specified by the test requestor. A minimum of two biaxial strain gages are required, at corresponding locations on opposite faces of the specimen at the center of the gage section, as illustrated in Fig. 1, Fig. 3, and Figs. 6-9. The biaxial gage elements are to be oriented at $\pm 45^\circ$ relative to the direction of the applied force.

NOTE 4—Three-element strain gage rosettes may be used in lieu of biaxial strain gages, but are not required. If utilized, two gage elements shall be oriented at $\pm 45^\circ$ relative to the direction of the applied force for each rosette.

7.4.1 Bonded Resistance Strain Gages—Strain gage selection is a compromise based on the type of material. An active gage length of 3 mm [0.125 in.] is recommended for most materials, although larger gages may be more suitable for some woven fabrics. The

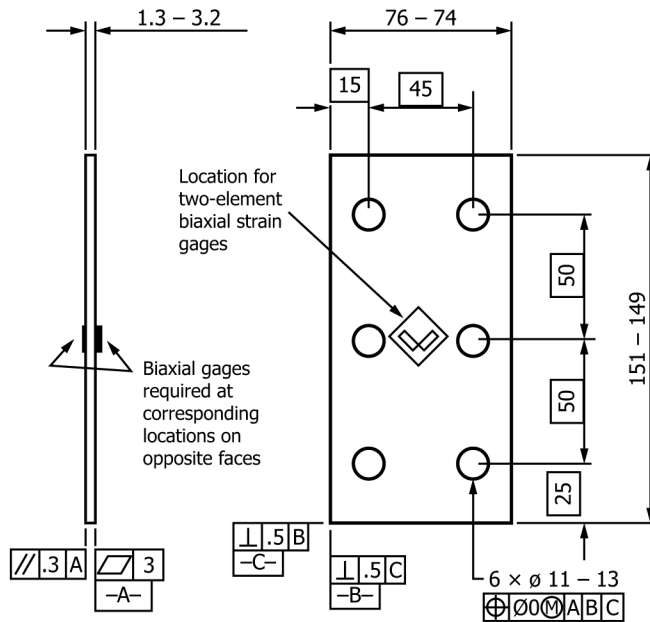


FIG. 6 Procedure A, Two-Rail Shear Specimen, SI Units

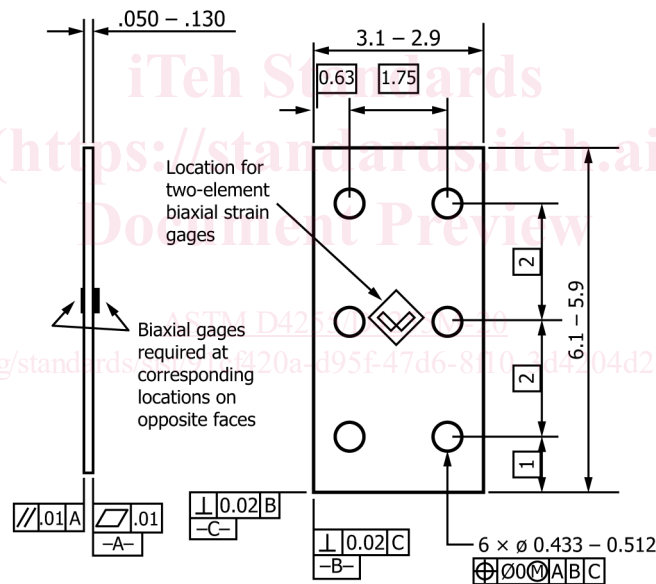


FIG. 7 Procedure A, Two-Rail Shear Specimen, Inch-Pound Units

gauge should not be so large that it lies within four specimen thicknesses of a rail. Gauge calibration certification shall comply with Test Methods E251. Biaxial strain gauges with a minimum normal strain range of approximately 3 % (measuring 6 % engineering shear strain) are recommended. When testing woven fabric laminates, gauge selection should consider the use of an active gauge length that is at least as large as the characteristic repeating unit of the weave. Some guidelines on strain gauge use on composites follow. Additional general information can be found in the literature.^{5,6}

7.4.1.1 Surface preparation of fiber-reinforced composites in accordance with Guide E1237 can penetrate the matrix material and cause damage to the reinforcing fibers, resulting in improper specimen failures. Reinforcing fibers should not be exposed or damaged during the surface preparation process. Consult the strain gauge manufacturer regarding surface preparation guidelines and

⁵ Tuttle, M. E., Tuttle, E., and Brinson, H. F., "Resistance-Foil Strain Gauge Technology as Applied to Composite Materials," *Experimental Mechanics*, 1984, Vol 24, No. 1, 1984, pp. 54-65, Errata noted in Vol. 26, No. 2, June 1986, pp. 153-154.

⁶ *Manual on Experimental Methods of Mechanical Testing of Composites*, C. H. Jenkins, Ed., second edition, Society for Experimental Mechanics, Section II, Strain Measurement, 1998, pp. 25-84.

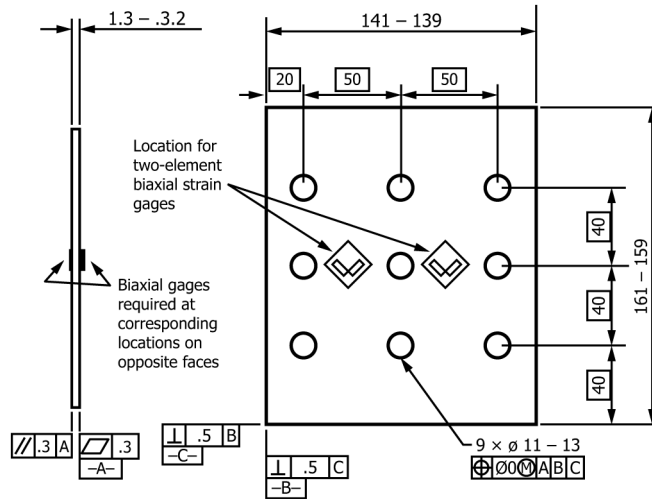


FIG. 8 Procedure B, Three-Rail Shear Specimen, SI Units

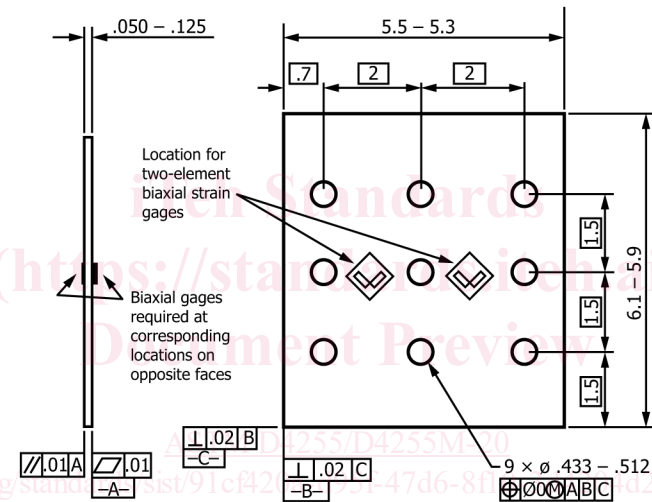


FIG. 9 Procedure B, Three-Rail Shear Specimen, Inch-Pound Units

recommended bonding agents for composites, pending the development of a set of standard practices for strain gage installation surface preparation of fiber-reinforced composite materials.

7.4.1.2 Select gages having higher resistances to reduce heating effects on low-conductivity materials.⁷ Resistances of 350 Ω or higher are preferred. Use the minimum possible gage excitation voltage consistent with the desired accuracy (1 to 2 $\sqrt{2}$ V is recommended) to reduce the power consumed by the gage further. Heating of the specimen by the gage may affect the performance of the material directly, or it may affect the indicated strain as a result of a difference between the gage temperature compensation factor and the coefficient of thermal expansion of the specimen material.

7.4.1.3 Temperature compensation is recommended when testing at Standard Laboratory Atmosphere. Temperature compensation is required when testing in nonambient temperature environments. When appropriate, use a traveler with identical lay-up and strain gage orientations for thermal strain compensation.

7.4.1.4 Correct for strain gage transverse sensitivity when the error caused by strain gage transverse sensitivity is greater than 1 %. Strain measurements using strain gages mounted to composite materials are susceptible to transverse sensitivity errors because of the highly orthotropic behavior of composite materials. Unidirectional composites are especially susceptible to strain gage transverse sensitivity errors.

⁷ Adams, D. F., Adams, F., and Lewis, E. Q., "Influence of Specimen Gage Length and Loading Method on the Axial Compression Strength of a Unidirectional Composite Material," *Experimental Mechanics*, Vol 31, No. 1, 1991, pp. 14-20.

7.4.1.5 Biaxial strain gages are required on opposite faces of the test specimen to detect buckling deformation. When the specimen bends as a result of buckling, strains on one face of the specimen exceed strains on the opposite face.

7.5 *Conditioning Chamber*—When conditioning materials in other than ambient laboratory environments, a temperature/vapor-level-controlled environmental conditioning chamber is required that shall be capable of maintaining the required relative temperature to within $\pm 3\text{ }^{\circ}\text{C}$ [$\pm 5\text{ }^{\circ}\text{F}$] and the required relative vapor level to within $\pm 3\%$. Chamber conditions shall be monitored either on an automated continuous basis or on a manual basis at regular intervals.

7.6 *Environmental Test Chamber*—An environmental test chamber is required for test environments other than ambient testing laboratory conditions. This chamber shall be capable of maintaining the gage section of the test specimen within $\pm 3\text{ }^{\circ}\text{C}$ [$\pm 5\text{ }^{\circ}\text{F}$] of the required test temperature during the mechanical test. In addition, the chamber may have to be capable of maintaining environmental conditions such as fluid exposure or relative humidity during the test (see 11.4).

NOTE 5—If specimens are to undergo environmental conditioning to equilibrium, and are of such type or geometry that the weight change of the material cannot be properly measured by weighing the specimen itself (such as a tabbed mechanical specimen), then another traveler specimen (reference sample) of the same nominal thickness and appropriate size (but without tabs) shall be used to determine when equilibrium has been reached for the specimens being conditioned.

8. Sampling and Test Specimens

8.1 *Sampling*—Test at least five specimens per test condition unless valid results can be gained through the use of fewer specimens, such as in the case of a designed experiment. Consult Practice E122 to determine statistically appropriate sample sizes. The method of sampling shall be reported.

8.2 *Geometry*—The specimens are rectangular panels with rows of holes for rail clamping bolts to pass through. It is recommended that laminates be 1.3 to 3.2 mm [0.050 to 0.13 in.] thick. Thin laminates buckle at low forces, while thicker laminates can have shear strengths exceeding the rail-clamping capacity. Thicker specimens are preferred for strength measurements because of their higher buckling stability. However, thicker specimens may not permit spacing of strain gage rosettes four specimen thicknesses from the rail edges, as specified in 7.4.1. The mandatory specimen requirements are described in 8.2.1 and 8.2.2.

8.2.1 *Two-Rail Shear Procedure*—The recommended test specimen shall conform to the dimensions shown in Fig. 6 (SI units) or Fig. 7 (inch-pound units) and ASTM Adjunct ADJD4255. Specimen flatness is essential to minimize the likelihood of buckling. Note that while the sample outer dimensions are uniform, many variations of hole patterns and tabbed edges have been used. See 8.3 and 8.4.

8.2.2 *Three-Rail Shear Procedure*—The test specimen shall conform to the dimensions shown in Fig. 8 (SI units) or Fig. 9 (inch-pound units) and ASTM Adjunct ADJD4255. Specimen flatness is essential to minimize the likelihood of buckling.

8.3 *Use of Tabs*—Tabs are not required. The key factor in the selection of specimen tolerances and gripping methods is the successful introduction of force in the specimen and the prevention of premature failure as a result of slipping. Therefore, the need to use tabs and specification of tab design parameters shall be determined by the end result: acceptable failure mode and location. If acceptable failure modes occur with reasonable frequency, then there is no reason to change a given gripping method.

8.3.1 *Tab Geometry*—Tab thickness may vary, but is commonly 1.5 mm [0.06 in.]. The selection of a tab configuration that can successfully produce a gage section failure without slipping is dependent upon the specimen material, specimen ply orientation, and the type of grips being used. For alignment purposes, it is essential that the tabs be of matched thicknesses and the tab surfaces be parallel.

8.3.2 *Friction Tabs*—Tabs need not always be bonded to the material under test to be effective in introducing the force into the specimen. Friction tabs, essentially nonbonded tabs held in place by the pressure of the grip, and often used with emery cloth or some other light abrasive between the tab and the specimen, have been successfully used in some applications. In specific cases, lightly serrated wedge grips have been successfully used with only emery cloth as the interface between the grip and the specimen. However, the abrasive used must be able to withstand significant compressive forces. Some types of emery cloth have been found ineffective in this application as a result of disintegration of the abrasive.