



Designation: D2876 – 00 (Reapproved 2020)

Standard Test Method for Water-Soluble Matter of Vegetable-Tanned Leather¹

This standard is issued under the fixed designation D2876; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This test method covers the determination of the water-soluble materials in all types of vegetable-tanned leathers. This test method does not apply to wet blue.

1.2 The values stated in SI units are to be regarded as standard. No other units of measurement are included in this standard.

1.3 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use. This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

1.4 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

2. Referenced Documents

- 2.1 *ASTM Standards:*²
D3495 Test Method for Hexane Extraction of Leather

3. Summary of Test Method

3.1 The test method gives the amount of water-soluble matter extracted from the leather at 35°C by 1 L of water in 3 h. The leather is first freed of hexane-extractable material by

¹ This test method is under the jurisdiction of ASTM Committee D31 on Leather and is the direct responsibility of Subcommittee D31.01 on Vegetable Leather. This test method was developed in cooperation with the American Leather Chemists Assn. (Standard Method B8–1954).

Current edition approved Dec. 1, 2020. Published December 2020. Originally approved in 1970. Last previous edition approved in 2016 as D2876– 00 (2016). DOI: 10.1520/D2876-00R20.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

extraction with hexane and leaving at ambient temperature in an exhaust hood to remove the hexane.

4. Significance and Use

4.1 The test method is useful for determining the water-soluble materials in vegetable-tanned leathers.

4.2 The water-soluble matter includes the soluble nontanning components of the tanning materials used, sugars and materials of a similar nature, and inorganic compounds such as Epsom salts, Glauber's salts, borax, and other soluble salts added during curing and tannery processing.

5. Apparatus

5.1 *Crystallizing Dish*, borosilicate glass, 50 mm tall, 70 mm in outside diameter, and weighing between 30 and 39 g.

5.2 *Extractor, Reed-Churchill Type*³—The extraction tube shall have an internal diameter of 45 ± 2 mm and a length of 233 ± 10 mm. See Fig. 1.

5.3 *Water Bath*, equipped to control the temperature at $35 \pm 0.5^\circ\text{C}$.

5.4 *Circulating Air Oven*, capable of maintaining a temperature of $99 \pm 1^\circ\text{C}$.

6. Test Specimen

6.1 The specimen shall consist of the 5-g leather sample that has been extracted with hexane as directed in Test Method D3495. Any deviation from this sample size should be included with the analytical results.

7. Procedure

7.1 Insert a plug of cotton or glass wool in the extraction tube before the specimen is added. Place the specimen in the extraction tube, slurry, and extract at 35°C by adjusting the flow to such a rate as to give 1 L of extract in 3 h. Cool the extract to 23°C, adjust to volume, and thoroughly mix.

7.2 If the extract is clear, pipet 100 mL into a tared crystallizing dish, evaporate and dry in a circulating air oven at $99 \pm 1^\circ\text{C}$ for 16 to 18 h, transfer to a desiccator, cool, and weigh.

³ Reed, H. C. and Churchill, J. B., "An Extractor for Water Soluble in Leather." *Journal of the American Leather Chemists Association*, JALCA, Vol 14, 1919, p. 137.

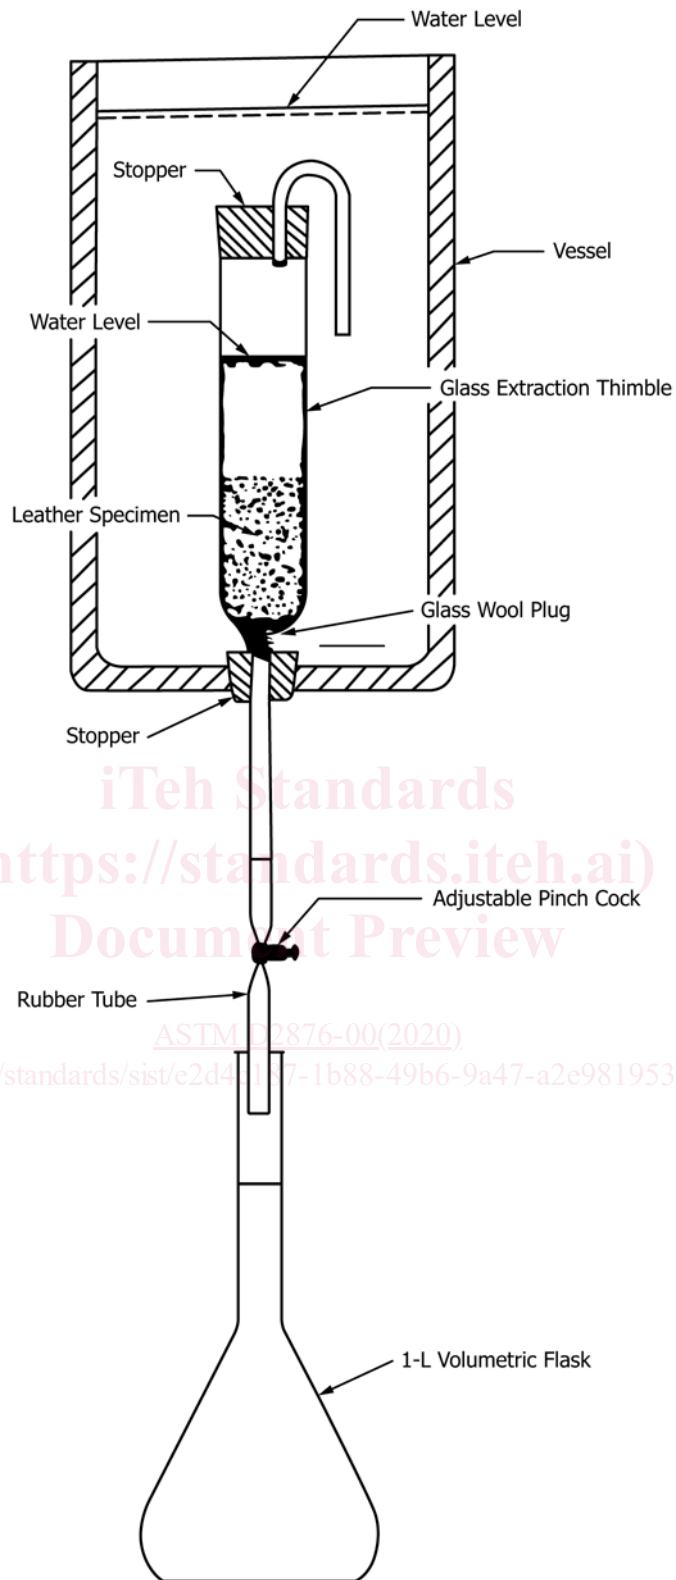


FIG. 1 Reed-Churchill Type Extractor