



# Standard Specification for Crosslinked Polyethylene (PEX) Tubing<sup>1</sup>

This standard is issued under the fixed designation F876; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon ( $\epsilon$ ) indicates an editorial change since the last revision or reapproval.

## 1. Scope\*

1.1 This specification covers crosslinked polyethylene (PEX) tubing that incorporates an optional polymeric inner, middle or outer layer and that is outside diameter controlled, made in nominal SDR9 tubing dimension ratios except where noted, and pressure rated for water at three temperatures (see [Appendix X1](#)). Included are requirements and test methods for material, workmanship, dimensions, burst pressure, hydrostatic sustained pressure, excessive temperature and pressure, environmental stress cracking, stabilizer functionality, bent-tube hydrostatic pressure, oxidative stability in potable chlorinated water, UV resistance, and degree of crosslinking. Requirements for tubing markings are also given. The components covered by this specification are intended for use in, but not limited to, residential and commercial, hot- and cold-potable water distribution systems, reclaimed water, fire protection, municipal water service lines, radiant heating and cooling systems, hydronic distribution systems, snow and ice melting systems, geothermal ground loops, district heating, turf conditioning, compressed air distribution and building services pipe, provided that the PEX tubing covered herein complies with applicable code requirements.

1.2 The text of this specification references notes, footnotes, and appendixes which provide explanatory material. These notes and footnotes (excluding those in tables and figures) shall not be considered as requirements of the specification.

1.3 The values stated in inch-pound units are to be regarded as standard. The values given in parentheses are mathematical conversions to SI units that are provided for information only and are not considered standard.

1.4 The following safety hazards caveat pertains only to the test methods portion, Section 7, of this specification: *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.*

<sup>1</sup> This specification is under the jurisdiction of ASTM Committee F17 on Plastic Piping Systems and is the direct responsibility of Subcommittee F17.26 on Olefin Based Pipe.

Current edition approved Dec. 15, 2020. Published January 2021. Originally approved in 1984. Last previous edition approved 2020 as F876–20a. DOI: 10.1520/F0876-20B.

1.5 *This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.*

## 2. Referenced Documents

### 2.1 ASTM Standards:<sup>2</sup>


- D618 Practice for Conditioning Plastics for Testing
- D792 Test Methods for Density and Specific Gravity (Relative Density) of Plastics by Displacement
- D1505 Test Method for Density of Plastics by the Density-Gradient Technique
- D1598 Test Method for Time-to-Failure of Plastic Pipe Under Constant Internal Pressure
- D1599 Test Method for Resistance to Short-Time Hydraulic Pressure of Plastic Pipe, Tubing, and Fittings
- D1600 Terminology for Abbreviated Terms Relating to Plastics
- D1898 Practice for Sampling of Plastics (Withdrawn 1998)<sup>3</sup>
- D2122 Test Method for Determining Dimensions of Thermoplastic Pipe and Fittings
- D2765 Test Methods for Determination of Gel Content and Swell Ratio of Crosslinked Ethylene Plastics
- D2837 Test Method for Obtaining Hydrostatic Design Basis for Thermoplastic Pipe Materials or Pressure Design Basis for Thermoplastic Pipe Products
- D3895 Test Method for Oxidative-Induction Time of Polyolefins by Differential Scanning Calorimetry
- F412 Terminology Relating to Plastic Piping Systems
- F877 Specification for Crosslinked Polyethylene (PEX) Hot- and Cold-Water Distribution Systems
- F1281 Specification for Crosslinked Polyethylene/Aluminum/Crosslinked Polyethylene (PEX-AL-PEX) Pressure Pipe
- F2023 Test Method for Evaluating the Oxidative Resistance of Crosslinked Polyethylene (PEX) Pipe, Tubing and

<sup>2</sup> For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

<sup>3</sup> The last approved version of this historical standard is referenced on www.astm.org.

**\*A Summary of Changes section appears at the end of this standard**

TABLE 1 Thermoplastic Tubing Material Designation Code Cells for SDR9 PEX

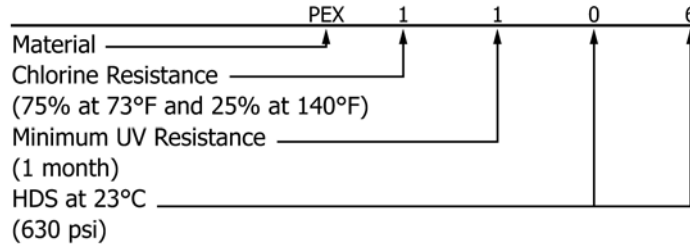

Property	Standard	0	1	2	3	4	5	6	7	8	9
Chlorine Resistance	F2023	Not tested or rated	75 % at 73°F and 25 % at 140°F	Reserved	50 % at 73°F and 50 % at 140°F	Reserved	100 % at 140°F	...	...	...	...
Minimum UV Resistance	F2657	Not tested or rated	1 month	3 months	6 months	...	...	...	...	...	...
HDS for water at 73°F	...	...	...	...	...	...	...	630	...	800	...

**Thermoplastic Tubing Material Designation Code**—For example ASTM F876 PEX tubing marked with the material designation code PEX 1106 is a PEX tubing meeting the chlorine resistance requirement for 25% of the time at 140°F and 75% of the time at 73°F having a Minimum UV resistance of 1 month and having an HDS for water at 73°F of 630psi (HDB of 1250 psi).

Systems to Hot Chlorinated Water

- F2657 Test Method for Outdoor Weathering Exposure of Crosslinked Polyethylene (PEX) Tubing
- F3203 Test Method for Determination of Gel Content of Crosslinked Polyethylene (PEX) Pipes and Tubing

2.2 ANSI Standard:

- B36.10 Standards Dimensions of Steel Pipe (IPS)<sup>4</sup>

2.3 Federal Standard:

- FED-STD-123 Marking for Shipment (Civil Agencies)<sup>5</sup>

2.4 Military Standard:

- MIL-STD-129 Marking for Shipment and Storage<sup>5</sup>

2.5 NSF Standard:

- NSF/ANSI 14 for Plastic Piping Components and Related Materials<sup>6</sup>

2.6 ISO Standards:<sup>4</sup>

- ISO 1167 Thermoplastics pipes, fittings and assemblies for the conveyance of fluids -- Determination of the resistance to internal pressure -- Part 1: General method
- ISO 13760 Plastics pipes for the conveyance of fluids under pressure -- Miner's rule -- Calculation method for cumulative damage
- ISO 15875 Plastics piping systems for hot and cold water installations -- Crosslinked polyethylene (PE-X) -- Part 1: General
- ISO R 161-1690 Pipes of Plastic Materials for the Transport of Fluids (Outside Diameters and Nominal Pressures) Part 1, Metric Series

2.7 PPI Standard:<sup>7</sup>

- PPI TR-3 Policies and Procedures for Developing Hydrostatic Design Basis (HDB), Hydrostatic Design Stresses (HDS), Pressure Design Basis (PDB), Strength Design Basis (SDB), Minimum Required Strength (MRS) Ratings, and Categorized Required Strength (CRS) for Thermoplastic Piping Materials or Pipe
- PPI TR-4 PPI Listing of Hydrostatic Design Basis (HDB), Strength Design Basis (SDB), Pressure Design Basis (PDB) and Minimum Required Strength (MRS) Ratings for Thermoplastic Piping Materials or Pipe

3. Terminology

3.1 *Definitions*—Definitions are in accordance with Terminology F412, and abbreviations are in accordance with Terminology D1600, unless otherwise specified. The abbreviation for crosslinked polyethylene is PEX. Plastic tubing denotes a particular diameter schedule of plastic pipe in which outside diameter of the tubing is equal to the nominal size plus 1/8 in. Plastic pipe outside diameter schedule conforms to ANSI B36.10.

3.2 *Definitions of Terms Specific to This Standard:*

3.2.1 *crosslinked polyethylene*—a polyethylene material that has undergone a change in molecular structure through processing whereby a majority of the polymer chains are chemically linked.

3.2.2 *hydrostatic design stress (HDS)*—the estimated maximum tensile stress the material is capable of withstanding continuously with a high degree of certainty that failure of the tube will not occur. This stress is circumferential when internal

<sup>4</sup> Available from American National Standards Institute (ANSI), 25 W. 43rd St., 4th Floor, New York, NY 10036, <http://www.ansi.org>.

<sup>5</sup> DLA Document Services Building 4/D 700 Robbins Avenue Philadelphia, PA 19111-5094 <http://quicksearch.dla.mil/>

<sup>6</sup> Available from NSF International, P.O. Box 130140, 789 N. Dixboro Rd., Ann Arbor, MI 48113-0140, <http://www.nsf.org>.

<sup>7</sup> Plastics Pipe Institute (PPI), 105 Decker Court, Suite 825 Irving TX, 75062. <http://www.plasticpipe.org>

TABLE 2 Outside Diameters and Tolerances for SDR9 PEX Tubing

Nominal Tubing Size	Average Outside Diameter		Tolerances for Average Diameter		Out-of-Roundness <sup>A</sup>	
	in.	(mm)	in.	(mm)	in.	(mm)
1/8	0.250	(6.35)	±0.003	(±0.08)	0.008	(0.20)
1/4	0.375	(9.52)	±0.003	(±0.08)	0.008	(0.20)
5/16	0.430	(10.92)	±0.003	(±0.08)	0.008	(0.20)
3/8	0.500	(12.70)	±0.003	(±0.08)	0.012	(0.32)
1/2	0.625	(15.88)	±0.004	(±0.10)	0.016	(0.40)
5/8	0.750	(19.05)	±0.004	(±0.10)	0.016	(0.40)
3/4	0.875	(22.22)	±0.004	(±0.10)	0.016	(0.40)
1	1.125	(28.58)	±0.005	(±0.12)	0.020	(0.48)
1 1/4	1.375	(34.92)	±0.005	(±0.12)	0.020	(0.48)
1 1/2	1.625	(41.28)	±0.006	(±0.16)	0.024	(0.60)
2	2.125	(53.98)	±0.006	(±0.16)	0.030	(0.76)
2 1/2	2.625	(66.68)	±0.007	(±0.18)	0.038	(0.95)
3	3.125	(79.38)	±0.008	(±0.20)	0.045	(1.14)
3 1/2	3.625	(92.08)	±0.008	(±0.20)	0.046	(1.16)
4	4.125	(104.78)	±0.009	(±0.23)	0.052	(1.32)
4 1/2	4.625	(117.48)	±0.009	(±0.23)	0.059	(1.49)
5	5.125	(130.18)	±0.010	(±0.25)	0.065	(1.65)
6	6.125	(155.58)	±0.011	(±0.28)	0.072	(1.83)

<sup>A</sup> The Out-of-Roundness specification applies only to tubing prior to coiling.

TABLE 3 Wall Thickness and Tolerances for SDR9 PEX Tubing<sup>A</sup>

Nominal Tubing Size	Minimum Wall Thickness		Tolerance	
	in.	(mm)	in.	mm
1/8	0.047 <sup>B</sup>	(1.19) <sup>B</sup>	+0.007	(+0.18)
1/4	0.062 <sup>B</sup>	(1.57) <sup>B</sup>	+0.010	(+0.25)
5/16	0.064 <sup>B</sup>	(1.63) <sup>B</sup>	+0.010	(+0.25)
3/8	0.070 <sup>B</sup>	(1.78) <sup>B</sup>	+0.010	(+0.25)
1/2	0.070 <sup>B</sup>	(1.78) <sup>B</sup>	+0.010	(+0.25)
5/8	0.083	(2.12)	+0.010	(+0.25)
3/4	0.097	(2.47)	+0.010	(+0.25)
1	0.125	(3.18)	+0.013	(+0.33)
1 1/4	0.153	(3.88)	+0.015	(+0.38)
1 1/2	0.181	(4.59)	+0.019	(+0.48)
2	0.236	(6.00)	+0.024	(+0.61)
2 1/2	0.292	(7.41)	+0.030	(+0.76)
3	0.347	(8.82)	+0.033	(+0.84)
3 1/2	0.403	(10.23)	+0.035	(+0.89)
4	0.458	(11.64)	+0.040	(+1.02)
4 1/2	0.514	(13.05)	+0.045	(+1.14)
5	0.569	(14.46)	+0.050	(+1.27)
6	0.681	(17.29)	+0.060	(+1.52)

<sup>A</sup> The minimum is the lowest wall thickness of the pipe at any cross section. The maximum permitted wall thickness, at any cross section, is the minimum wall thickness plus the stated tolerance. All tolerances are on the plus side of the minimum requirement.

<sup>B</sup> For nominal tubing sizes of 1/2 and below, wall thickness minimums are not functions of SDR.

hydrostatic water pressure is applied. The HDS is equal to the hydrostatic design basis (HDB) times the design factor (DF) for water. For this standard, the design factor is equal to 0.50.

$$HDS = HDB \times DF$$

$$= HDB \times 0.50 \text{ (for this standard)}$$

3.2.3 hydrostatic design basis (HDB)—one of a series of established stress values (specified in Test Method D2837) for a plastic compound obtained by categorizing the long-term hydrostatic strength determined in accordance with Test Method D2837.

3.2.3.1 Discussion—A listing of HDB and HDS values are contained in PPI publication PPI TR-4.

3.2.4 pressure rating (PR)—the estimated maximum water pressure the tube is capable of withstanding continuously with a high degree of certainty that failure of the tube will not occur.

3.2.5 relation between dimensions, hydrostatic design stress, and pressure rating—the following expression, commonly known as the ISO equation,<sup>8</sup> is used in this specification to relate dimensions, hydrostatic design stress, and pressure rating:

$$2S/P = (D_o/t) - 1 \tag{1}$$

or

$$2S/P = R - 1$$

where:

- $S$  = hydrostatic design stress, psi (or MPa),
- $P$  = pressure rating, psi (or MPa),
- $D_o$  = average outside diameter, in. (or mm),
- $t$  = minimum wall thickness, in. (or mm), and
- $R$  = standard dimension ratio, SDR.

3.2.6 standard dimension ratio (SDR)—the ratio of outside diameter to wall thickness. For PEX tubing, it is calculated by dividing the average outside diameter of the tubing in inches or in millimetres by the minimum wall thickness in inches or millimetres. If the wall thickness calculated by this formula is less than 0.070 in. (1.78 mm) it shall be arbitrarily increased to 0.070 in. except for sizes 5/16 in. and smaller, as specified in Table 3. The SDR values shall be rounded to the nearest 0.5.

3.2.7 thermoplastic tubing materials designation code—The tubing material designation code shall consist of the abbreviation for the type of plastic (PEX) followed by four Arabic numerals — two to describe the short-term properties, in accordance with the ASTM standard being referenced, and two to designate the hydrostatic design stress when tested in water at 73°F (23°C) in units of 100 psi, with any decimal figures dropped. See Table 1.

<sup>8</sup> ISO R161-1690.

3.2.7.1 *Discussion*—The first digit is for chlorine resistance tested in accordance with Test Method **F2023**.

(1) A digit “0” indicates that the PEX tubing either has not been tested for chlorine resistance or that the PEX tubing does not meet the minimum requirement for chlorine resistance.

(2) A digit “1” indicates the PEX tubing has been tested and meets the requirement of **6.9** for minimum chlorine resistance at the end use condition of 25% at 140°F (60°C) and 75% at 73°F (23°C).

(3) A digit “2” is reserved for future application.

(4) A digit “3” indicates that the PEX tubing has been tested and meets the requirement of **6.9** for minimum chlorine resistance at end use condition of 50% at 140°F and 50% at 73°F.

(5) A digit “4” is reserved for future application.

(6) A digit “5” indicates that the PEX tubing has been tested and meets the requirement of **6.9** for minimum chlorine resistance at end use conditions of 100% of the time at 140°F.

3.2.7.2 *Discussion*—The second digit is for demonstrated UV resistance of PEX material when tested in accordance with Test Method **F2657**. For PEX tubing with the first digit of the material designation code equal to 1, 3, or 5 the second digit shall be one of the classification digits listed in **Table 1** for the Nominal Exposure Time Period from **Table 1** in Test Method **F2657** where the decreased average failure time from 10.3 of Test Method **F2657** is less than or equal to 21%. For PEX tubing with the first digit of the material designation code equal to 0, the second digit shall be one of the classification digits from **Table 1** for the Nominal Exposure Time Period from **Table 1** of Test Method **F2657** where the UV-exposed samples meet the requirement of **7.10** Stabilizer Functionality, or alternatively using the criteria for potable water piping found in the preceding sentence of this clause.

3.2.7.3 *Discussion*—PEX tubing is not designed for outdoor use. Data from short-term exposure testing in accordance with this test method can be used to judge the relative performance of PEX tubing stored outdoors for short periods of time prior to installation completely shielded from sunlight.

3.2.7.4 *Discussion*—The 21 % pass/fail criteria originates from the statistical analysis of an aggregate of data sets generated using Test Method **F2023** and represents the mean Lower Predictive Limit (95 % two sided) compared to the expected failure times based on three stress levels at each of three temperatures. Thus, this value represents the limit for statistical differentiation in failure times using Test Method **F2023** at the 95 % confidence level (2 sided). This research was conducted for the Plastics Pipe Institute in 2005.<sup>9</sup>

(1) The UV resistance shall be demonstrated on representative pipe samples for the original validation of pipe made from a particular PEX material, that material being the combination of PEX resin and its additive system.

(2) The last two digits are the hydrostatic design stress for water at 73°F (23°C) in units of 100 psi with any decimal figures dropped. Where the hydrostatic design stress code contains less than two figures, a zero is used before the number.

**TABLE 4 Hydrostatic Design Stresses and Pressure Ratings for SDR 9 PEX Tubing for Water at Different Temperatures**

Rated Temperature		Hydrostatic Design Stress		Pressure Rating for Water	
°F	°C	psi	(MPa)	psi	(MPa)
73	23	630	(4.34)	160	(1.10)
180	82	400	(2.76)	100	(0.69)
200	93	315	(2.17)	80	(0.55)

Thus, a complete material designation code for PEX tubing shall consist of the three letters “PEX” and four digits.

## 4. Tubing Classification

4.1 *General*—This specification covers one PEX tubing material in one standard dimension ratio and having pressure ratings for water of three temperatures. The pressure ratings decrease as the temperature is increased.

4.2 *Standard Thermoplastic Pipe Dimension Ratio (SDR)*—This specification covers PEX tubing in one standard dimension ratio (SDR 9) for nominal diameters  $\frac{5}{8}$  in. and larger, and with a specified wall thickness for smaller diameters. The pressure ratings are uniform for all nominal tubing sizes.

## 5. Materials

5.1 *General*—Crosslinked polyethylene tubing, meeting the requirements of this specification, are primarily defined by means of three criteria, namely, (1) nominal density, (2) degree of crosslinking, and (3) long-term strength tests. There is a strong correlation between nominal density and results of short-term strength tests.

NOTE 1—PEX tubing intended for use in the transport of potable water should be evaluated and certified as safe for this purpose by a testing agency acceptable to the local health authority. The evaluation should be in accordance with requirements for chemical extraction, taste, and odor that are no less restrictive than those included in NSF/ANSI 14. The seal or mark of the laboratory making the evaluation should be included on the tubing.

5.2 *Basic Materials*—PEX tubing shall be made from polyethylene compounds which have been crosslinked by peroxides, or silane compounds in extrusion, or by electron beam after extrusion, or by other means such that the tubing meets the performance requirements of Section 6. For the use temperatures that the tubing will be marked for, the materials, procedure for mixing, and the process for crosslinking shall result in a product with long term hydrostatic stress ratings equal to or better than those shown in **Table 4**, when determined in accordance with procedures no less restrictive than those of PPI TR-3. Tubing incorporating an optional layer shall also meet the requirement of PPI TR-3. See **Appendix X1** for additional information on PPI hydrostatic stress ratings.

NOTE 2—Tubing produced by crosslinking by peroxides, or silane compounds in extrusion, or by electron beam after extrusion have met the requirements of Section 6. There are several other processes for producing crosslinked polyethylene tubing. However, each process must be established as meeting the requirements of this specification.

5.3 *Tubing Material Designation*—The tubing meeting the requirements of this specification shall be designated PEX.

<sup>9</sup> PPI Technical literature, Final Report – Proposal for the Evaluation of the Chlorine Resistance of UV Exposed PEX Pipe.



**TABLE 5 Minimum Hydrostatic Sustained Pressure Requirements for SDR9 PEX Tubing**

Nominal Tubing Size (NTS)	Pressure Required for Test, psi <sup>A</sup> (MPa)					
	73°F	(23°C)	180°F	(82°C)	200°F	(93°C)
1/8	595	(4.10)	355	(2.45)	300	(2.07)
1/4	515	(3.55)	305	(2.10)	260	(1.79)
3/8	425	(2.93)	250	(1.72)	210	(1.45)
1/2	330	(2.28)	195	(1.34)	165	(1.14)
5/8 and larger	325	(2.24)	190	(1.31)	165	(1.14)

<sup>A</sup>The hoop stresses used to derive these test pressures are:  
at 73 °F (23 °C) 1300 psi (8.96 MPa).  
at 180 °F (82 °C) 770 psi (5.31 MPa).  
at 200 °F (93 °C) 650 psi (4.48 MPa).

## 6. Requirements

6.1 *Workmanship*—The tubing shall be uniform in appearance and consistent throughout. The walls shall be free of cracks, holes, blisters, voids, foreign inclusion, or other defects that are visible to the naked eye and that affect the wall integrity. The tubing shall be as uniform as commercially practicable in color, opacity, density, and other physical properties.

### 6.2 Dimensions and Tolerances:

6.2.1 *Outside Diameters*—The outside diameters and tolerances of the tubing including the layers shall be as shown in **Table 2**, when measured in accordance with **7.4** and **7.4.1**.

6.2.1.1 *Layer*—Tubing that incorporates an inner, middle or outer layer have to meet the minimum wall thickness and tolerances requirements as specified in **Table 3**. In addition, the layer shall not result in the reduction of the total PEX material below that specified in **Table 3**. In the case of tubing with a middle layer, the total base PEX material wall thickness shall be the sum of the inner and outer base PEX material wall thicknesses.

6.2.2 *Wall Thickness*—The wall thickness and tolerances shall be as shown in **Table 3**, when measured in accordance with **7.4** and **7.4.2**.

NOTE 3—Tubing diameters less than 5/8 in. diameter have minimum wall thicknesses based on both hydrostatic and mechanical strength.

6.2.3 *Out-of Roundness*—The maximum out-of roundness requirements, shown in **Table 2** for tubing, apply to the average, measured diameter. Tubing shall be measured prior to coiling.

6.2.4 *Coil diameters*—PEX tubing may be supplied in either straight lengths or coils with a minimum coiling diameter based on a tubing bend radius of 10 times the outside diameter.

6.3 *Density*—When determined in accordance with **7.5**, the crosslinked polyethylene tubing material shall have a minimum density of 0.926 Mg/m<sup>3</sup>.

6.4 *Hydrostatic Sustained Pressure Strength*—The tubing shall not fail, balloon, burst, or weep as defined in Test Method **D1598**, at the test pressures shown in **Table 5** or **Table 6** when tested in accordance with **7.6**.

6.5 *Hydrostatic Burst Pressure*—The minimum burst pressure for PEX plastic tubing shall be as shown in **Table 7**, when determined in accordance with **7.7**.

**TABLE 6 Minimum 165-Hour Hydrostatic Sustained Pressure Requirements for SDR9 PEX Tubing**

Nominal Tubing Size (NTS)	Minimum Burst Pressures at Different Temperatures, psi <sup>A</sup> (MPa)			
	73 °F	(23 °C)	200 °F	(93 °C)
1/8	870	(6.00)	390	(2.69)
1/4	752	(5.19)	336	(2.32)
3/8	620	(4.27)	275	(1.90)
1/2	480	(3.31)	215	(1.48)
5/8 and larger	475	(3.27)	210	(1.45)

<sup>A</sup>The hoop stresses used to derive these test pressures are 1380 psi (9.51 MPa) at 73 °F (23 °C) and 690 psi (4.76 MPa) at 200 °F (93 °C).

6.6 *Environmental Stress Cracking*— There shall be no loss of pressure in the tubing, when tested in accordance with **7.8**.

6.7 *Degree of Crosslinking*—When tested in accordance with **7.9**, the degree of crosslinking for PEX tubing material shall be within the range from 65 to 89 % inclusive. Depending on the process used, the following minimum percentage crosslinking values shall be achieved: 70 % by peroxides, 65 % by electron beam, or 65 % by silane compounds.

6.7.1 *Layer*—For tubing with a layer, the degree of crosslinking of the PEX material excluding the layer shall be in accordance with **6.7**.

NOTE 4—Techniques as found in Test Methods **D2765**.

6.8 *Stabilizer Functionality*—There shall be no loss of pressure in the tubing, when tested in accordance with **7.10**.

6.9 *Oxidative Stability in Potable Chlorinated Water Applications*—PEX tubing intended for use in the transport of potable water shall have a minimum extrapolated time-to-time failure of 50 years and comply with the requirements for a first digit of “1” or higher in the PEX Tubing Material Designation Code when tested and evaluated in accordance with **7.11**.

6.10 *Oxidative Stability in Outdoor Weathering Exposure (UltraViolet)*—PEX tubing intended for use in the transport of potable water shall comply with the requirements for a second digit of “1” or higher in the PEX Tubing Material Designation Code when tested and evaluated in accordance with Test Method **F2657** where the decreased average failure time is less than or equal to 21 %.

NOTE 5—Test Method **F2657** provides a measure of the effects of natural sunlight ultraviolet exposure; however, outdoor weathering in accordance with Test Method **F2657** requires open outside exposure that

**TABLE 7 Burst Pressure Requirements for Water at Different Temperatures for SDR9 PEX Tubing**

Nominal Tubing Size (NTS)	Minimum Burst Pressures at Different Temperatures, psi <sup>A</sup> (MPa)			
	73 °F	(23 °C)	180 °F	(82 °C)
1/8	870	(6.00)	390	(2.69)
1/4	752	(5.19)	336	(2.32)
3/8	620	(4.27)	275	(1.90)
1/2	480	(3.31)	215	(1.48)
5/8 and larger	475	(3.27)	210	(1.45)

<sup>A</sup> The hoop stresses used to derive these test pressures are:  
at 73 °F (23 °C) 1900 psi (13.10 MPa).  
at 180 °F (82 °C) 850 psi (5.86 MPa).

also includes incidental exposure to natural environmental conditions (cyclical temperature change, dust, precipitation, humidity, etc.). Accordingly, testing per Test Method **F2657** incorporates weathering exposure during the measurement of UV resistance.

6.11 *Adhesion Test*—Tubing that incorporates an optional inner, middle or outer layer shall not show any delamination when tested in accordance with 9.3.1 of Specification **F1281**.

6.12 *Bent Tube Hydrostatic Sustained Pressure Strength:*

6.12.1 *General*—PEX tubing, up to and including 1 in. nominal diameter, can be installed bent by using either of two techniques described in **X3.2.4** and **X3.2.5**, provided that **6.12.2** and **6.12.3** requirements are met.

NOTE 6—PEX tubing, larger than 1 in. nominal diameter, is typically installed as main distribution lines and is installed in straight runs. Fittings are used when a change in direction of 90° or greater and a bend radius of 6 times the outside diameter is needed. The test procedures in **6.12.2** and **6.12.3** are intended to evaluate PEX tubing installed in tight bend applications in accordance with the procedures in **X3.2.4** and **X3.2.5**. This application applies to tubing up to and including 1 in nominal diameter only.

6.12.2 Hot-bent tubing, with a radius of 2.5 times the outside diameter and consisting of a continuous bend length inducing not less than 90° angle, shall meet the minimum hydrostatic sustained pressure strength requirements for 180 °F as shown in **Table 5** when tested in accordance with **7.6**. The bend length and bend angle is kept throughout the testing period by rigid supports immediately outside the bend.

6.12.3 Cold-bent tubing, with a radius of 6 times the outside diameter and consisting of a continuous bend length inducing not less than 90° angle, shall meet the minimum hydrostatic sustained pressure strength requirements for 180 °F as shown in **Table 5** when tested in accordance with **7.6**. The bend length and bend angle is kept throughout the testing period by rigid secures immediately outside the bend.

6.13 *Excessive Temperature—Pressure Capacity:*

6.13.1 Tubing shall not fail as defined in Test Method **D1598** in less than 30 days (720 h) when tested in accordance with **7.12**.

NOTE 7—The rationale for test requirement **6.13** is so that in the event of a domestic hot-water system malfunction, PEX tubing shall have adequate strength to accommodate short-term conditions, 48 h of 210 °F (99 °C), 150 psi (1034 kPa) until repairs can be made.

6.13.2

## 7. Test Methods

7.1 *Conditioning*—Condition the specimens at 73 ± 4 °F (23 ± 2 °C) and 50 ± 5 % relative humidity for not less than 40 h prior to test in accordance with Procedure A of Practice **D618**, for those tests where conditioning is required. In cases of disagreement, the tolerances shall be ±1.8 °F (±1 °C) and ±2 % relative humidity.

7.2 *Test Conditions*—Conduct the test in the standard laboratory atmosphere of 73 ± 4 °F (23 ± 2 °C) and 50 ± 5 % relative humidity, unless otherwise specified in the test methods or in this specification. In cases of disagreement, the tolerances shall be ±1.8 °F (±1 °C) and ±2 % relative humidity.

7.3 *Sampling*—A sufficient quantity of tubing, as agreed upon by the purchaser and the seller, shall be selected and tested to determine conformance with this specification (see Practice **D1898**). In the case of no prior agreement, random samples selected by the testing laboratory shall be deemed adequate.

7.3.1 *Test Specimens*—Not less than 50 % of the test specimens required for any pressure test shall have at least a part of the marking in their central sections. The central section is that portion of tubing that is at least one tubing diameter away from an end closure.

7.4 *Dimensions and Tolerances*—Use any length of tubing to determine the dimensions. Measure in accordance with Test Method **D2122**.

7.4.1 *Outside Diameter*—Measure the outside diameter of the tubing in accordance with Test Method **D2122**. The referee method of measurement is to be by circumferential wrap tape. The tolerance for out-of-roundness shall apply only to tubing prior to shipment. Averaging micrometer or vernier caliper measurements, four (4) maximum and minimum diameter measurements at any cross section, may be used for quality control checks if desired.

7.4.2 *Wall Thickness*—Make micrometer measurements of the wall thickness in accordance with Test Method **D2122** to determine the maximum and minimum values. Measure the wall thickness at both ends of the tubing to the nearest 0.001 in. (0.025 mm).

7.4.2.1 *Layer*—Make measurements of the layer or layers using either a video microscope, a microscope with 0.001 in. graduation or optical comparator to determine the maximum and minimum values.

7.5 *Density*—Determine the density of the tubing compound in accordance with Test Method **D1505**, or Test Methods **D792**, using three specimens.

7.6 *Hydrostatic Sustained Pressure Test*—Test specimens with water at the three controlled temperatures and under the pressures given in **Table 5** or **Table 6** in accordance with Test Method **D1598**.

7.6.1 Hydrostatic Sustained Pressure Tests shall be performed using the temperatures and pressures specified in **Table 5** only for the original approval testing of tubing made from a particular compound. For routine verification testing, test either of the conditions described in 7.6.1.1 or 7.6.1.2.

7.6.1.1 All three temperatures using pressures specified in **Table 5** for 1000 hours.

7.6.1.2 At 180 °F (82 °C) for 1000 hours at pressures per and at 73 °F (23 °C) and 200 °F (93 °C) for 165 hours using pressures per **Table 6**. The determination of which of these options to be used shall be made by agreement between the tubing producer and the test laboratory or certification agency.

NOTE 8—The pressures specified in **Table 5** and **Table 6** are based on slopes of the ISO 15875 reference lines for PEX and the minimum LTHS values required at each temperature. The pressures specified in **Table 6** will result in an equivalent or more stringent test than the pressures specified in **Table 5**. Testing using **Table 6** accelerates confirmation of the hydrostatic pressure handling capability of the tubing. The excessive temperature and pressure test provides additional verification that the tubing will tolerate high temperature use for extended periods of time. The use of a combination of **Table 5** and **Table 6** conditions per 7.6.1 maintains harmony with Specification **F877** which only requires hydrostatic sustained pressure testing at 180 °F (82 °C) for 1000 hours.

7.6.2 Select the test specimens at random in accordance with 7.3. The minimum specimen length between end fittings shall be 12 in. (305 mm) (see Test Method **D1598**) or ten times the nominal diameter of the sampled tubing, whichever is greater. The maximum specimen length between end fittings shall be 15 in. (380 mm) or twelve times the nominal diameter, whichever is greater. Test six specimens at each temperature except when 7.6.2.2 applies. Each of the specimens tested shall bear some portion of the permanent marking on the tubing.

7.6.2.1 Only one representative size of tubing made in accordance with this specification need be sampled for testing to demonstrate conformance with the Hydrostatic Sustained Pressure requirements of this specification.

7.6.2.2 When testing in accordance with the requirements of 6.12.2 and 6.12.3, only one cold bent and one hot bent specimen are required to be tested and the length of these specimens between end closures shall be between 12 and 18 in. (305 and 457 mm). Testing in accordance with the requirements of 6.12.2 and 6.12.3 shall be conducted at 180 °F (82 °C) at the pressures specified in **Table 5** for 1000 h.

7.6.3 Condition the specimens for at least 2 h to within  $\pm 4$  °F ( $\pm 2$  °C) of the specified test temperatures.

7.6.4 Maintain the specimens at the pressures indicated for the appropriate temperatures for a period minimum of 1000 h if testing at the temperatures and pressures specified in **Table 5**

or for a minimum of 165 hours if testing at the temperatures and pressures specified in **Table 6**. Maintain the pressures and temperatures during the test in accordance with the tolerances specified in Test Method **D1598**. When the minimum test duration has been surpassed for a specimen being tested, testing of that specimen is permitted to be stopped before specimen failure.

7.6.5 Failure of any one of the specimens tested in less than the specified time at any given temperature constitutes failure of the test. Failure of the tubing shall be defined in accordance with Test Method **D1598**, which includes ballooning, bursting, seeping or weeping. Specimens which show delamination (separation of the layers visible to the unaided eye) are also considered to have failed. If one of six specimens tested at a temperature and pressure in accordance with **Table 6** fails, retest of six additional specimens at the same temperature but with pressures in accordance with **Table 5** is permitted and in this case any additional failures shall constitute failure of the test with no additional retest permitted.

7.7 *Hydrostatic Burst Pressure*—Determine the minimum burst pressure with at least five specimens at each temperature in accordance with Test Method **D1599**. The time of testing of each specimen shall be between 60 and 70 s. The minimum required burst pressure values are specified in **Table 7**. If the minimum required burst pressure has been surpassed within the specified time for a specimen being tested, testing of the specimen is permitted to be stopped before the specimen ruptures or bursts.

7.7.1 Hydrostatic burst pressure tests need be performed only for the original approval of tubing made from a particular compound and for routine production monitoring. Test sizes representative of normal production at the required intervals.

7.8 *Environmental Stress Cracking Test*—Test six randomly selected 10 to 15-in. (250 to 375-mm) long specimens.

NOTE 9—Straight or previously coiled specimens are permissible although straight specimens are preferred for ease of notching and accurate control of the notch depth.

7.8.1 Within each specimen make a notch on the inside of the tubing wall in the axial direction. The notch depth shall be 10.3 % of the minimum wall thickness as specified in **Table 3** for the specimen tubing size. The notch depth tolerance shall be  $\pm 0.0005$ -in. ( $\pm 0.013$  mm). The full depth notch length shall be 0.9 to 1.1-in. in length (23 to 28 mm). Use a sharp blade mounted in a jig to make this notch. Use a depth micrometer or other means for setting the blade in the jig so that the notch depth is controlled as specified. The notch shall be placed, at its nearest point, at least 1.5 times the nominal diameter away from end closures.

7.8.2 Fill the tubing with the test medium which is 5.0  $\pm$  0.5 % by weight nonylphenoxy poly(ethyleneoxy) ethanol mixed with 95 % of untreated water.

NOTE 10—The nonylphenoxy poly(ethyleneoxy) ethanol has historically been synonymous with “Igepal CO-630”<sup>10</sup> that is, CAS# 68412-54-4

<sup>10</sup> This method is based on the use of “Igepal Co-630,” a trademark for a nonylphenoxy poly(ethyleneoxy) ethanol, which may be obtained from GAF Corp., Dyestuff and Chemical Div., 140 W. 51st St., New York, NY 10020.