



Designation: D5798 – 21

Standard Specification for Ethanol Fuel Blends for Flexible-Fuel Automotive Spark-Ignition Engines¹

This standard is issued under the fixed designation D5798; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

This standard has been approved for use by agencies of the U.S. Department of Defense.

1. Scope*

1.1 This specification covers the requirements for automotive fuel blends of ethanol and gasoline for use in ground vehicles equipped with ethanol fuel blend flexible-fuel spark-ignition engines. Fuel produced to this specification contains 51 % to 83 % by volume ethanol. This fuel is for use in flexible-fuel vehicles and is sometimes referred to at retail as “Ethanol Flex-Fuel.” [Appendix X1](#) discusses the significance of the properties specified.

1.2 The vapor pressure of ethanol fuel blends is varied for seasonal climatic changes. Vapor pressure is increased at lower temperatures to ensure adequate flexible-fuel vehicle operability. Ethanol content and selection of hydrocarbon blendstock are adjusted by the blender to meet these vapor pressure requirements.

1.3 This specification formerly covered Fuel Ethanol (Ed70-Ed85) for Automotive Spark-Ignition Engines, also known commercially as E85. The nomenclature “fuel ethanol” has been changed to “ethanol fuel blends” to distinguish this product from denatured fuel ethanol Specification [D4806](#). To facilitate blending of ethanol fuel blends that meet seasonal vapor pressure requirements, a new lower minimum ethanol content has been established.

1.4 The United States government has established various programs for alternative fuels. Many of the definitions of alternative fuel used by these programs may be more restrictive than the requirements of this specification. See [4.1.2.1](#) for additional information on alternative fuels containing ethanol.

1.5 The values stated in SI units are to be regarded as standard. The values given in parentheses after SI units are provided for information only and are not considered standard.

1.6 The following safety hazard caveat pertains only to the test method portion, [8.1.8](#), of this specification. *This standard*

does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety, health, and environmental practices and determine the applicability of regulatory limitations prior to use.

1.7 This international standard was developed in accordance with internationally recognized principles on standardization established in the Decision on Principles for the Development of International Standards, Guides and Recommendations issued by the World Trade Organization Technical Barriers to Trade (TBT) Committee.

2. Referenced Documents

2.1 ASTM Standards:²

- [D86](#) Test Method for Distillation of Petroleum Products and Liquid Fuels at Atmospheric Pressure
- [D130](#) Test Method for Corrosiveness to Copper from Petroleum Products by Copper Strip Test
- [D381](#) Test Method for Gum Content in Fuels by Jet Evaporation
- [D525](#) Test Method for Oxidation Stability of Gasoline (Induction Period Method)
- [D1613](#) Test Method for Acidity in Volatile Solvents and Chemical Intermediates Used in Paint, Varnish, Lacquer, and Related Products
- [D1688](#) Test Methods for Copper in Water
- [D3231](#) Test Method for Phosphorus in Gasoline
- [D4057](#) Practice for Manual Sampling of Petroleum and Petroleum Products
- [D4175](#) Terminology Relating to Petroleum Products, Liquid Fuels, and Lubricants
- [D4177](#) Practice for Automatic Sampling of Petroleum and Petroleum Products
- [D4306](#) Practice for Aviation Fuel Sample Containers for Tests Affected by Trace Contamination

¹ This specification is under the jurisdiction of ASTM Committee [D02](#) on Petroleum Products, Liquid Fuels, and Lubricants and is under the direct responsibility of Subcommittee [D02.A0.02](#) on Oxygenated Fuels and Components.

Current edition approved Oct. 1, 2021. Published October 2021. Originally approved in 1996. Last previous edition approved in 2020 as D5798 – 20. DOI: 10.1520/D5798-21.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard’s Document Summary page on the ASTM website.

*A Summary of Changes section appears at the end of this standard

- D4806** Specification for Denatured Fuel Ethanol for Blending with Gasolines for Use as Automotive Spark-Ignition Engine Fuel
- D4814** Specification for Automotive Spark-Ignition Engine Fuel
- D4953** Test Method for Vapor Pressure of Gasoline and Gasoline-Oxygenate Blends (Dry Method)
- D5191** Test Method for Vapor Pressure of Petroleum Products and Liquid Fuels (Mini Method)
- D5453** Test Method for Determination of Total Sulfur in Light Hydrocarbons, Spark Ignition Engine Fuel, Diesel Engine Fuel, and Engine Oil by Ultraviolet Fluorescence
- D5501** Test Method for Determination of Ethanol and Methanol Content in Fuels Containing Greater than 20 % Ethanol by Gas Chromatography
- D5854** Practice for Mixing and Handling of Liquid Samples of Petroleum and Petroleum Products
- D6423** Test Method for Determination of pHe of Denatured Fuel Ethanol and Ethanol Fuel Blends
- D7039** Test Method for Sulfur in Gasoline, Diesel Fuel, Jet Fuel, Kerosine, Biodiesel, Biodiesel Blends, and Gasoline-Ethanol Blends by Monochromatic Wavelength Dispersive X-ray Fluorescence Spectrometry
- D7319** Test Method for Determination of Existent and Potential Sulfate and Inorganic Chloride in Fuel Ethanol and Butanol by Direct Injection Suppressed Ion Chromatography
- D7328** Test Method for Determination of Existent and Potential Inorganic Sulfate and Total Inorganic Chloride in Fuel Ethanol by Ion Chromatography Using Aqueous Sample Injection
- D7667** Test Method for Determination of Corrosiveness to Silver by Automotive Spark-Ignition Engine Fuel—Thin Silver Strip Method
- D7671** Test Method for Corrosiveness to Silver by Automotive Spark-Ignition Engine Fuel—Silver Strip Method
- D7757** Test Method for Silicon in Gasoline and Related Products by Monochromatic Wavelength Dispersive X-ray Fluorescence Spectrometry
- D7795** Test Method for Acidity in Ethanol and Ethanol Blends by Titration
- D7923** Test Method for Water in Ethanol and Hydrocarbon Blends by Karl Fischer Titration
- E203** Test Method for Water Using Volumetric Karl Fischer Titration
- E1064** Test Method for Water in Organic Liquids by Coulometric Karl Fischer Titration

2.2 Government Standards:³

United States Code of Federal Regulations, Title 40, Part 1090

2.3 SAE Papers:⁴

SAE 2007–01–4006 A Model for Estimating Vapor Pressures of Commingled Ethanol Fuels

3. Terminology

3.1 For general terminology, refer to Terminology **D4175**.

3.2 Definitions:

3.2.1 *denaturants, n*—materials added to ethanol to make it unsuitable for beverage use under a formula approved by a regulatory agency to prevent the imposition of beverage alcohol tax.

3.2.1.1 *Discussion*—Denaturants are only those materials added by the denaturer to comply with the approved formula; any materials absorbed later are not denaturants. **D4806**

3.2.2 *denatured fuel ethanol, n*—fuel ethanol made unfit for beverage use by the addition of denaturants under formula(s) approved by the applicable regulatory agency to prevent the imposition of beverage alcohol tax. **D4806**

3.2.3 *ethanol, n*—ethyl alcohol, the chemical compound $\text{CH}_3\text{CH}_2\text{OH}$. **D4806**

3.2.4 *finished fuel, n*—a homogeneous mixture of blendstocks and fuel additives meeting all specification and regulatory requirements for its intended use at the location where sold. **D4814**

3.2.5 *flexible-fuel vehicle, n*—a vehicle designed to operate on both gasoline and ethanol fuel blends and can operate on any mixture of both.

3.2.5.1 *Discussion*—In the United States, these vehicles have U.S. EPA emissions certifications using gasoline complying with U.S. EPA requirements and ethanol fuel blends that meet the requirements of Specification D5798.

3.2.5.2 *Discussion*—Flex-fuel vehicle and FFV are commonly used synonyms for flexible-fuel vehicle.

3.2.5.3 *Discussion*—The fuels may also contain antioxidants, corrosion inhibitors, metal deactivators, and dyes but do not contain lead additives. A jurisdiction may set limits on lead content from all sources.

3.2.6 *gasoline, n*—a volatile mixture of liquid hydrocarbons, generally containing small amounts of additives, suitable for use as a fuel in spark-ignition, internal combustion engines. **D4814**

3.2.7 *hydrocarbon, n*—a compound composed solely of hydrogen and carbon.

3.2.8 *methanol, n*—methyl alcohol, the chemical compound CH_3OH .

3.2.9 *pHe, n*—a measure of hydrogen ion activity, defined by Test Method **D6423**. **D6423**

3.2.9.1 *Discussion*—The traditional pH measurement of hydrogen ion activity is in an aqueous system but the measurement done in Test Method **D6423** is in a nearly anhydrous environment. **D6423**

3.3 Definitions of Terms Specific to This Standard:

⁴ Available from SAE International (SAE), 400 Commonwealth Dr., Warrendale, PA 15096-0001, <http://www.sae.org>.

³ A printed copy of the Code of Federal Regulations may be purchased from the U.S. Government Printing Office, Superintendent of Documents, 732 N. Capitol Street, N.W., Mail Stop: SDE, Washington, DC 20401 or the online store at <http://bookstore.gpo.gov/>. The Code of Federal Regulations may be browsed online at <http://www.gpoaccess.gov/cfr/index.html>.

3.3.1 *hydrocarbon blendstock, n*—a blending component composed of hydrocarbons which boil in the gasoline temperature distillation range and trace amounts of naturally occurring compounds or additives composed of hydrogen, carbon, and other elements such as sulfur, oxygen and nitrogen.

4. Ordering Information

4.1 The purchasing agency shall:

4.1.1 Indicate the season and locality in which the fuel is to be used,

4.1.2 If requested, ensure that the ethanol concentration meets the requirements for an alternative fuel for federal fleets.

4.1.2.1 The composition of alternative fuels in the United States is regulated by various government agencies and regulations including the U.S. Department of Energy (DOE) and U.S. Environmental Protection Agency (EPA). With regard to fuel properties including volatility, this specification can be more or less restrictive than DOE or EPA rules, regulations and waivers. To qualify as an alternative fuel for federal fleet use in the United States, the ethanol blend is required to meet the U.S. Department of Energy’s definition of alternative fuels, enacted under the Energy Policy Act of 1992 (Title III, Sec. 301). For ethanol, the Act defines “alternative fuel” as a mixture containing denatured ethanol at a volume of “85 percent or more (or such other percentage, but not less than 70 percent, as determined by the Secretary, by rule...)” Correcting for denaturant content, a blend of 70 % to 85 % by volume denatured fuel ethanol contains 68 % to 83 % by volume ethanol as measured by Test Method **D5501**. The U.S. government has other programs and definitions for alternative fuels.

4.1.2.2 Users of this specification are advised to check with the applicable regulatory agency for specific alternative fuel requirements.

5. Ethanol Fuel Blends Performance Requirements

5.1 Ethanol Fuel Blends shall conform to the requirements of **Table 1**.

5.1.1 The components used to produce Ethanol Fuel Blends are limited to denatured fuel ethanol and hydrocarbon blendstock as defined in **5.2**.

5.1.2 The intentional addition of lead or phosphorus compounds to ethanol fuel blends is not permitted.

5.2 Hydrocarbon Blendstock blended with the denatured fuel ethanol shall meet the requirements of **Table 2**.

5.2.1 The hydrocarbon blendstock may be unleaded gasoline, gasoline blendstock for oxygenate blending (BOB), natural gasoline or other hydrocarbons in the gasoline boiling range.

5.2.2 In the United States, 40 CFR Part 1090.640 provides an exemption for use of deposit control additives for ethanol fuel blends. The hydrocarbon blendstock (gasoline) is exempt from the gasoline deposit control requirements in 40 CFR Part 1090.260.

5.3 Vapor pressure is varied for seasonal and climatic changes by providing four vapor pressure classes for ethanol fuel blends.

5.3.1 Class 1 encompasses geographical areas with 6-hour tenth percentile minimum ambient temperature of greater than 5 °C (41 °F).

5.3.2 Class 2 encompasses geographical areas with 6-hour tenth percentile minimum ambient temperature of greater than –5 °C (23 °F) but less than or equal to 5 °C (41°F).

5.3.3 Class 3 encompasses geographical areas with 6-hour tenth percentile minimum ambient temperature greater than –13 °C (9 °F) but less than or equal to –5 °C (23°F).

5.3.4 Class 4 encompasses geographical areas with 6-hour tenth percentile minimum ambient temperature less than or equal to –13 °C (9 °F).

5.3.5 There is a 10 % probability that the highest temperature of the six coldest consecutive hourly temperature readings of a 24 h day will be colder than the 6 h tenth percentile minimum ambient temperature.

5.3.6 See **5.4.4** and **5.5.2** for seasonal and geographical distributions.

TABLE 1 Requirements for Ethanol Fuel Blends^A

Properties	Class 1 ^B	Class 2	Class 3	Class 4	Test Methods
Vapor pressure, kPa (psi)	38–62 (5.5–9.0)	48–65 (7.0–9.5)	59–83 (8.5–12.0)	66–103 (9.5–15.0)	D4953 or D5191
		All Classes ^C			
Ethanol Content, volume %		51–83			D5501
Water, % by volume (% by mass), max		0.8 (1.0)			D7923 , E203 , or E1064
Methanol Content, max, volume %		0.5			D5501
Sulfur Content, max, mg/kg		80			D5453 or D7039
Acidity, (as acetic acid CH ₃ COOH), mass % (mg/L) [mg/kg], max		0.005 (40) [50]			D7795
Solvent-washed gum content, max, mg/100 mL		5			D381
Unwashed gum content, max, mg/100 mL		20			D381
pH _e		6.5 to 9.0			D6423
Inorganic chloride content, max, mg/kg		1			D7319 or D7328
Copper content, max, mg/L		0.07			D1688

^A For information on alternative fuels, see **4.1.2.1**.

^B See **5.3.1** for volatility class criteria.

^C Ethanol content and selection of hydrocarbon blendstock are adjusted by the blender to meet vapor pressure requirements. See **X1.3.2** for additional information and guidance for blending.

TABLE 2 Requirements for Hydrocarbon Blendstock

Properties		Test Methods
Distillation, end point, max, °C (°F)	225 (437)	D86
Oxidation stability, minimum, minutes	240	D525
Copper Strip Corrosion, max	No. 1	D130
Silver Strip Corrosion, max	No. 1	D7667, D7671
Vapor pressure	Report ^A	D4953, D5191

^A While not a requirement of this specification, the blender will need to know the vapor pressure of the hydrocarbon blendstock in order to choose a suitable blend ratio for the components to meet the vapor pressure requirement of a particular volatility class.

5.4 Regulatory and Other Requirements in the United States:

5.4.1 Ethanol content requirements for ethanol alternative fuel blends can be found in **4.1.2.1**.

5.4.2 The denaturant for the denatured fuel ethanol used in making ethanol fuel blends shall meet the requirements of Section 5 in Specification **D4806**.

5.4.3 Ethanol fuel blends of any volatility class shall meet certain U.S. Environmental Protection Agency (EPA) regulations for unleaded gasoline. See **Appendix X2**.

5.4.4 The United States seasonal and geographical distribution for the four vapor pressure classes is shown in **Table 3**.

5.5 Regulatory and Other Requirements Outside the United States:

5.5.1 Users of this specification are advised to consult with the applicable regulatory agency for specific requirements for their jurisdictions.

5.5.2 Users of the specification in geographical areas outside the United States need to determine the 6-hour tenth percentile minimum ambient temperatures for their geographic areas and times of year in order to select the appropriate classes of fuel.

6. Workmanship

6.1 The finished fuel blend shall be visually free of sediment, suspended or undissolved matter. It shall be clear and bright at the fuel temperature at the point of custody transfer or at an alternative temperature agreed upon by the purchaser and seller.

NOTE 1—Finished fuel should be resistant to phase separation or undissolved matter at the lowest temperatures to which it is likely to be subjected, dependent on the time and place of its intended use. See Specification **D4814**, Table X7.1 for guidance.

NOTE 2—Solubility is temperature dependent. As this fuel cools some high molecular weight additives can become insoluble.

6.2 The hydrocarbon blendstock for ethanol fuel blends should avoid the use of materials at concentrations that can separate from solution at the expected temperatures of blending, storage, and use. If drag reducing agent (additive) (DRA) or deposit control additive is used in the hydrocarbon blendstock distribution system, it should not be present in the product delivered to be used as a hydrocarbon blendstock at a concentration or shear condition, which can separate from the denatured fuel ethanol under those conditions.

6.2.1 In the United States, 40 CFR Part 1090.640 provides an exemption for use of deposit control additives for ethanol fuel blends. Hydrocarbon blendstock (gasoline) that is used to

produce ethanol fuel blends is exempt from the gasoline deposit control requirements in 40 CFR Part 1090.260.

6.2.2 Different hydrocarbon blendstocks can also exhibit a broad range of chemical properties including, but not limited to, aromatics content, olefins content, saturates content, which may influence the solubility of additives in a finished ethanol fuel blend. Blenders or terminals should actively engage additive manufacturers to determine whether the additives will remain soluble with various concentrations of ethanol and gasoline.

6.2.3 Currently there is no ASTM approved test method for measuring DRA in ethanol fuel blends although some laboratories may use non-ASTM test methods.

6.3 The specification defines only a basic purity for ethanol fuel blends. The product shall be free of any adulterant or contaminant that can render the material unacceptable for its commonly used applications.

6.3.1 Manufacturers and blenders of ethanol fuel blends shall avoid ethanol (for example, improperly recycled ethanol), or denaturants and hydrocarbon blend components contaminated by silicon-containing materials, or both. Silicon contamination of gasoline, denatured ethanol, and their blends has led to fouled vehicle components (for example, spark plugs, exhaust oxygen sensors, catalytic converters) requiring parts replacement and repairs. Test Method **D7757** is a procedure for determining silicon content but no specification limits have been established for silicon.

7. Sampling, Containers, and Sample Handling

7.1 The reader is strongly advised to review all intended test methods prior to sampling to better understand the importance and effects of sampling technique, proper containers, and special handling required for each test method.

7.2 Correct sampling procedures are critical to obtain a sample representative of the lot intended to be tested. Use appropriate procedures in Practice **D4057** for manual method sampling and in Practice **D4177** for automatic sampling, as applicable.

7.3 The correct sample volume and appropriate container selection are important decisions that can impact test results. Refer to Practice **D4306** for aviation fuel container selection for tests sensitive to trace contamination. Refer to Practice **D5854** for procedures on container selection and sample mixing and handling. Where practical, ethanol fuel blends should be sampled in glass containers. If samples must be collected in metal containers, do not use soldered metal containers. The soldering flux in the containers and the lead in the solder can contaminate the sample. Plastic containers should be avoided.

7.4 A minimum sample size of about 1 L (1 U.S. qt) is recommended.

8. Test Methods

8.1 Determine the requirements enumerated in this specification in accordance with the test methods listed in **Table 1**. The scope of some of the test methods listed below does not

TABLE 3 United States Seasonal and Geographical Volatility Specifications for Ethanol Fuel Blends

NOTE 1—This schedule, subject to agreement between the purchaser and the seller, denotes the vapor pressure class of the fuel at the time and place of bulk delivery to fuel-dispensing facilities for the end user. Shipments should anticipate this schedule.

NOTE 2—Where alternative classes are listed, either class is acceptable; the option shall be exercised by the seller.

NOTE 3—This schedule was developed using actual (versus altitude-adjusted) 6 h tenth percentile minimum ambient temperatures.

State	Jan	Feb	March	Apr	May	June	July	Aug	Sep	Oct	Nov	Dec
Alabama	2	2	2	2	2/1	1	1	1	1	1/2	2	2
Alaska												
Southern Region	4	4/3	3	3/2	2	2/1	1	1/2	2/3	3	3/4	4
South Mainland	4	4	4	4	4/2	2	2/1	1/2	2/3	3/4	4	4
Arizona												
N of 34° Latitude	3	3	3	3/2	2	2/1	1	1	1/2	2/3	3	3
S of 34° Latitude	2	2	2	2/1	1	1	1	1	1	1/2	2	2
Arkansas	3	3	3/2	2/1	1	1	1	1	1/2	2	2/3	3
California ^A												
North Coast	2	2	2	2	2/1	1	1	1	1	1/2	2	2
South Coast	2	2	2	2	2/1	1	1	1	1	1/2	2	2
Southeast	2	2	2	2	2/1	1	1	1	1	1/2	2	2
Interior	2	2	2	2	2	2/1	1	1	1	1/2	2	2
Colorado												
E of 105° Longitude	4	4/3	3	3/2	2	2/1	1	1	1/2	2/3	3	3/4
W of 105° Longitude	4	4	4/3	3	3/2	2	2/1	1/2	2/3	3/4	4	4
Connecticut	4	4	4/3	3/2	2	2/1	1	1	1/2	2	2/4	4
Delaware	3	3	3/2	2	2/1	1	1	1	1/2	2	2/3	3
District of Columbia	3	3	3/2	2	2/1	1	1	1	1/2	2	2/3	3
Florida												
N of 29° Latitude	2	2	2	2/1	1	1	1	1	1	1/2	2	2
S of 29° Latitude	2	2/1	1	1	1	1	1	1	1	1	1/2	2
Georgia	3	3/2	2	2/1	1	1	1	1	1	1/2	2	2/3
Hawaii	1	1	1	1	1	1	1	1	1	1	1	1
Idaho	4	4	4/3	3/2	2	2	2/1	1/2	2	2/3	3/4	4
Illinois												
N of 40° Latitude	4	4	4/3	3/2	2	2/1	1	1	1/2	2/3	3/4	4
S of 40° Latitude	4	4/3	3	3/2	2/1	1	1	1	1/2	2/3	3/4	4
Indiana	4	4	4/3	3/2	2/1	1	1	1	1/2	2/3	3/4	4
Iowa	4	4	4	4/2	2	2/1	1	1	1/2	2/3	3/4	4
Kansas	4	4/3	3	3/2	2	2/1	1	1	1/2	2/3	3/4	4
Kentucky	3	3	3/2	2/1	1	1	1	1	1/2	2	2/3	3
Louisiana	2	2	2	2/1	1	1	1	1	1	1/2	2	2
Maine	4	4	4	4/2	2	2/1	1	1/2	2	2/3	3/4	4
Maryland	3	3	3/2	2	2/1	1	1	1	1/2	2	2/3	3
Massachusetts	4	4	4/3	3/2	2/1	1	1	1	1/2	2	2/4	4
Michigan												
Lower Michigan	4	4	4/3	3/2	2/1	1	1	1/2	2/3	3/4	4	4
Upper Michigan	4	4	4	4/3	3/2	2/1	1	1/2	2	2/3	3/4	4
Minnesota	4	4	4	4/3	3/2	2/1	1	1/2	2	2/4	4	4
Mississippi	2	2	2	2/1	1	1	1	1	1	1/2	2	2
Missouri	4	4/3	3	3/2	2/1	1	1	1	1/2	2/3	3	3
Montana	4	4	4	4/3	3/2	2	2/1	1/2	2/3	3/4	4	4
Nebraska	4	4	4/3	3/2	2	2/1	1	1/2	2	2/3	3/4	4
Nevada												
N of 38° Latitude	4	4	4/3	3/2	2	2	2/1	1/2	2	2/3	3/4	4
S of 38° Latitude	2	2	2	2/1	2/1	1	1	1	1	1/2	2	2
New Hampshire	4	4	4/3	3/2	2	2/1	1	1/2	2	2/3	3/4	4
New Jersey	3	3	3/2	2	2/1	1	1	1	1/2	2	2/3	3
New Mexico												
N of 34° Latitude	4	4/3	3	3/2	2	2/1	1	1	1/2	2/3	3	3/4
S of 34° Latitude	3	3	3/2	2/1	1	1	1	1	1	1/2	2/3	3
New York												
N of 42° Latitude	4	4	4	4/2	2	2/1	1	1/2	2	2/3	3/4	4
S of 42° Latitude	4	4	4/3	3/2	2/1	1	1	1	1/2	2	2/3	3/4
North Carolina	3	3	3/2	2	2/1	1	1	1	1/2	2/3	3	3
North Dakota	4	4	4	4/3	3/2	2/1	1	1/2	2	2/4	4	4
Ohio	4	4	4/3	3/2	2	2/1	1	1	1/2	2/3	3/4	4
Oklahoma	3	3	3	3/2	2/1	1	1	1	1/2	2	2/3	3
Oregon												
E of 122° Longitude	4	4/3	3	3/2	2	2	2/1	1/2	2	2/3	3	3/4
W of 122° Longitude	3	3/2	2	2	2	2/1	1	1	1/2	2	2	2/3
Pennsylvania												
N of 41° Latitude	4	4	4	4/2	2	2/1	1	1/2	2	2/3	3/4	4
S of 41° Latitude	3	3	3	3/2	2/1	1	1	1	1/2	2	2/3	3
Rhode Island	3	3	3	3/2	2/1	1	1	1	1/2	2	2/3	3
South Carolina	2	2	2	2/1	1	1	1	1	1/2	2	2	2
South Dakota	4	4	4	4/2	2	2/1	1	1/2	2	2/3	3/4	4

TABLE 3 *Continued*

State	Jan	Feb	March	Apr	May	June	July	Aug	Sep	Oct	Nov	Dec
Tennessee	3	3	3/2	2	2/1	1	1	1	1/2	2	2/3	3
Texas												
N of 31° Latitude	3	3	3/2	2	2/1	1	1	1	1/2	2	2/3	3
S of 31° Latitude	2	2	2	2/1	1	1	1	1	1	1/2	2	2
Utah	4	4/3	3	3/2	2	2/1	1	1	1/2	2/3	3	3/4
Vermont	4	4	4/3	3/2	2	2/1	1	1/2	2	2/3	3/4	4
Virginia	3	3	3/2	2	2/1	1	1	1	1/2	2	2/3	3
Washington												
E of 122° Longitude	4	4/3	3	3/2	2	2	2/1	1	1/2	2/3	3	3/4
W of 122° Longitude	3	3/2	2	2	2	2/1	1	1	1/2	2	2	2/3
West Virginia	4	4/3	3	3/2	2	2/1	1	1/2	2	2/3	3	3/4
Wisconsin	4	4	4	4/2	2	2/1	1	1/2	2	2/3	3/4	4
Wyoming	4	4	4	4/3	3/2	2	2/1	1/2	2	2/4	4	4

^A Details of State Climatological Division by county as indicated:

California, North Coast—Alameda, Contra Costa, Del Norte, Humboldt, Lake, Marin, Mendocino, Monterey, Napa, San Benito, San Francisco, San Mateo, Santa Clara, Santa Cruz, Solano, Sonoma, Trinity

California, Interior—Lassen, Modoc, Plumas, Sierra, Siskiyou, Alpine, Amador, Butte, Calaveras, Colusa, El Dorado, Fresno, Glenn, Kern (except that portion lying east of Los Angeles County Aqueduct), Kings, Madera, Mariposa, Merced, Placer, Sacramento, San Joaquin, Shasta, Stanislaus, Sutter, Tehama, Tulare, Tuolumne, Yolo, Yuba, Nevada

California, South Coast—Orange, San Diego, San Luis Obispo, Santa Barbara, Ventura, Los Angeles (except that portion north of the San Gabriel Mountain range and east of the Los Angeles County Aqueduct)

California, Southeast—Imperial, Riverside, San Bernardino, Los Angeles (that portion north of the San Gabriel Mountain range and east of the Los Angeles County Aqueduct), Mono, Inyo, Kern (that portion lying east of the Los Angeles County Aqueduct)

include ethanol fuel blends. The precision of these test methods can differ from the reported precisions when testing ethanol fuel blends.

8.1.1 *Ethanol Content*—Test Method **D5501**.

8.1.2 *Vapor Pressure*—Test Method **D4953** or **D5191**.

8.1.3 *Acidity*—Test Method **D7795**.

8.1.4 *pHe*—Test Method **D6423**.

8.1.5 *Gum Content, Solvent Washed and Unwashed*—Test Method **D381**.

8.1.6 *Inorganic Chloride Content*—Test Methods **D7319** or **D7328**.

8.1.7 *Water Content*—Test Method **E203**, **E1064**, or **D7923**.

8.1.8 *Copper Content*—Modification of Test Method **D1688**.

8.1.8.1 The modifications of Test Method **D1688**, Test Method A (atomic absorption, direct) consists of mixing reagent-grade ethanol (which may be denatured in accordance with TTB Formula 3A or 30) in place of water as the solvent of diluent for the preparation of reagents and standard solu-

tions. However, this shall not be done to prepare the stock copper solution described in the section on Copper Solution, Stock in Test Method **D1688**. Because a violent reaction can occur between the acid and the ethanol, use water, as specified, in the acid solution part of the procedure to prepare the stock copper solution. Use ethanol for the rinse and final dilution only.

8.1.9 *Sulfur Content*—Test Method **D5453** or **D7039**.

8.1.10 *Methanol Content*—Test Method **D5501**.

9. Keywords

9.1 acidity; alcohol; automotive spark-ignition engine fuel; chloride; copper corrosion; E85; ether; ethanol fuel blends for flexible-fuel automotive spark-ignition engines; flexible-fuel; hydrocarbon; hydrocarbon blendstock; inorganic chloride; lead; MTBE; oxidation stability; oxygenates; pHe; phosphorus; solvent washed gum content; sulfur; vapor pressure; volatility; water

APPENDIXES

(Nonmandatory Information)

X1. SIGNIFICANCE OF SPECIFICATION FOR ETHANOL FUEL BLENDS FOR FLEXIBLE-FUEL AUTOMOTIVE SPARK-IGNITION ENGINES

X1.1 Ethanol

X1.1.1 The ethanol content of ethanol fuel blends is a critical parameter as it affects the capability of the fuel metering system of the flexible-fuel vehicle to establish the proper air/fuel ratio for optimum vehicle operation. Ethanol content can also affect the lubricating properties of the fuel, the water tolerance of the fuel, and the ability to meet cold and cool area volatility requirements.

X1.1.2 The inclusion of impurities, some denaturants, and contaminants, except for the deliberately added hydrocarbons or additives, or both, can impact adversely on the properties and performance of ethanol fuel blends as an automotive spark-ignition engine fuel. The quantities of some of these materials are controlled by specified property limits. The limits on water, methanol, and on types of denaturants, as well as

minimums on the amount of ethanol and hydrocarbons limit, but do not prevent, the presence of trace materials.

X1.2 Hydrocarbon Blendstock

X1.2.1 Hydrocarbons are deliberately added to provide higher vapor pressure for improved cold startability and warm up driveability. The addition of hydrocarbon blendstock to fuel ethanol changes its volatility and can affect the flammability of fuel tank vapors.

X1.2.2 Hydrocarbon blendstock used in ethanol fuel blends will be unleaded gasoline, gasoline blendstock for oxygenate blending (BOB), natural gasoline or other hydrocarbons in the gasoline boiling range (Specification D4814). The hydrocarbon blendstock shall be stable and noncorrosive.

X1.2.3 The inclusion of impurities and contaminants, except for the deliberately added denatured fuel ethanol or additives, or both, can impact adversely on the properties and performance of ethanol fuel blends as an automotive spark-ignition engine fuel. The quantities of some of these materials are controlled by specified property limits. The limits on water, types of hydrocarbons as well as minimums on the amount of ethanol and hydrocarbons limit, but do not prevent, the presence of trace materials.

X1.3 Vapor Pressure

X1.3.1 The addition of volatile hydrocarbons is required for adequate cold startability. The addition of hydrocarbon blendstocks that are too volatile can contribute to hot fuel handling problems. Higher vapor pressures are required at colder ambient temperatures while lower volatility fuels are less prone to hot fuel handling problems at higher (summertime) ambient temperatures. Excessive vapor pressure contributes to evaporative emissions. Lower and upper limits on vapor pressure for the four volatility classes are used to define the acceptable range of volatile components to ensure adequate vehicle performance.

X1.3.2 The following four charts can be used to estimate the vapor pressure of ethanol fuel composition. Figs. X1.1 and X1.2 are in SI units and Figs. X1.3 and X1.4 are in United States customary units. The charts enable blenders who know the vapor pressure of the gasoline component to estimate the correct proportion of gasoline and denatured fuel ethanol to achieve the vapor pressure required in this specification. These curves were developed using the predictive equations found in SAE paper 2007-01-4006.

X1.4 Acidity

X1.4.1 Very dilute aqueous solutions of organic acids, such as acetic acid, are highly corrosive to a wide range of metals and alloys. It is therefore necessary to keep such acids at a very low level.

X1.4.1.1 The acidity method is intended to determine the concentration of organic acids in ethanol. However, carbon dioxide is very soluble in ethanol, and in the presence of water it converts to carbonic acid. Dissolved carbon dioxide is a known interferent and can cause a false high reading when using Test Method D1613. Prior to 2018, Test Method D1613 was included in this standard. Due to the carbon dioxide interference, a number of false high acidity values were reported causing disruptions in the marketplace. The problems with using Test Method D1613 led to the development of Test Method D7795, which includes a purge step, which removed the carbon dioxide interference. Test Method D1613 has been removed as an appropriate test method for this standard. Dissolved carbon dioxide is a known interference and can cause a false high reading without a purge step; using Test Method D7795 this interference should be eliminated.

X1.5 pHe

X1.5.1 When the pHe of ethanol fuel blends used in automotive spark-ignition engines is below 6.5, fuel pumps can malfunction as a result of a film forming between the brushes and commutator, fuel injectors can fail from corrosive wear,

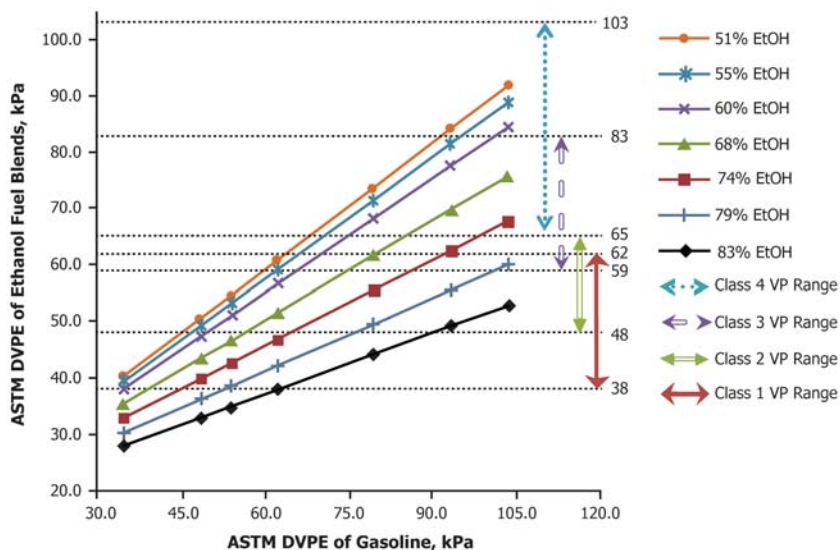


FIG. X1.1 Estimated Ethanol Fuel Blend Vapor Pressure as a Functions of Gasoline Vapor Pressure and Ethanol Content, kPa