

---

# International Standard



# 6126

---

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

---

## Spherical plain bearing rod ends — Dimension series E and JK — Boundary dimensions and tolerances

*Embouts à rotule — Séries de dimensions E et JK — Dimensions d'encombrement et tolérances*

First edition — 1982-05-01

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 6126:1982](#)

<https://standards.iteh.ai/catalog/standards/sist/6d557686-8f1c-4341-a339-159877d1264/iso-6126-1982>

---

UDC 621.822.3

Ref. No. ISO 6126-1982 (E)

Descriptors : bearings, plain bearings, spherical bearings, dimensions, dimensional tolerances.

Price based on 5 pages

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been set up has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 6126 was developed by Technical Committee ISO/TC 4, *Rolling bearings*, and was circulated to the member bodies in February 1981.

ITeH STANDARD PREVIEW  
(standards.iteh.ai)

It has been approved by the member bodies of the following countries :

Austria	Hungary	Romania
Brazil	Italy	South Africa, Rep. of
Canada	Japan	Spain
China	Korea, Dem. P. Rep. of	Sweden
Czechoslovakia	Korea, Rep. of	Switzerland
Egypt, Arab Rep. of	Mexico	United Kingdom
France	Netherlands	USSR
Germany, F. R.	Poland	

The member body of the following country expressed disapproval of the document on technical grounds :

USA

# Spherical plain bearing rod ends — Dimension series E and JK — Boundary dimensions and tolerances

## 1 Scope and field of application

This International Standard lays down the boundary dimensions of spherical plain bearing rod ends, dimension series E (cartridge design) and dimension series JK (integral design). Furthermore it specifies the tolerances for boundary dimensions.

Boundary dimensions and tolerances specified in this International Standard may not necessarily apply to spherical plain bearing rod ends for airframe application.

## 2 References

ISO 272, *Fasteners — Hexagon products — Widths across flats.*

ISO 286/1, *ISO system of limits and fits — Part 1: General, tolerances and deviations.*<sup>1)</sup>

ISO 582, *Rolling bearings — Metric series — Chamfer dimension limits.*

ISO 965/1, *ISO general purpose metric screw threads — Tolerances — Part 1: Principles and basic data.*

ISO 1132, *Rolling bearings — Tolerances — Definitions.*

ISO 4759/1, *Tolerances for fasteners — Part 1: Bolts, screws and nuts with thread diameters > 1,6 and < 150 mm and product grades A, B and C.*

ISO 6124, *Radial spherical plain bearings — Joint type — Dimension series E and G — Boundary dimensions.*

ISO 6125, *Radial spherical plain bearings — Joint type — Tolerances.*

## 3 Symbols

$B$  = inner ring width, nominal

$\Delta_{Bs}$  = deviation of a single inner ring width

$C_1$  = width of rod end eye

$d$  = bearing bore diameter, nominal

$D$  = bearing outside diameter, nominal

$d_1$  = outer diameter of inner ring face

$d_2$  = rod end eye outer diameter

$d_3$  = diameter of threads, nominal

$d_4$  = rod end shank diameter

$d_5$  = shank shoulder diameter

$h$  = centre height of rod end with male thread

$\Delta_{hs}$  = deviation of the actual centre height, rod end with male thread

$h_1$  = centre height of rod end with female thread

$\Delta_{h1s}$  = deviation of the actual centre height, rod end with female thread

$l_1$  = length of external thread

$l_2$  = overall length of rod end with male thread

$l_3$  = length of internal thread

$l_4$  = overall length of rod end with female thread

$l_5$  = height of flats and shank shoulder

$r_1$  = inner ring chamfer, height and width

$r_{1smin}$  = smallest permissible single  $r_1$

$s$  = width across flats

$\alpha$  = angle of permissible tilt

1) At present at the stage of draft. (Revision of ISO/R 286-1962.)

4 Dimensions and tolerances

4.1 Spherical plain bearing rod ends, dimension series E (cartridge design)

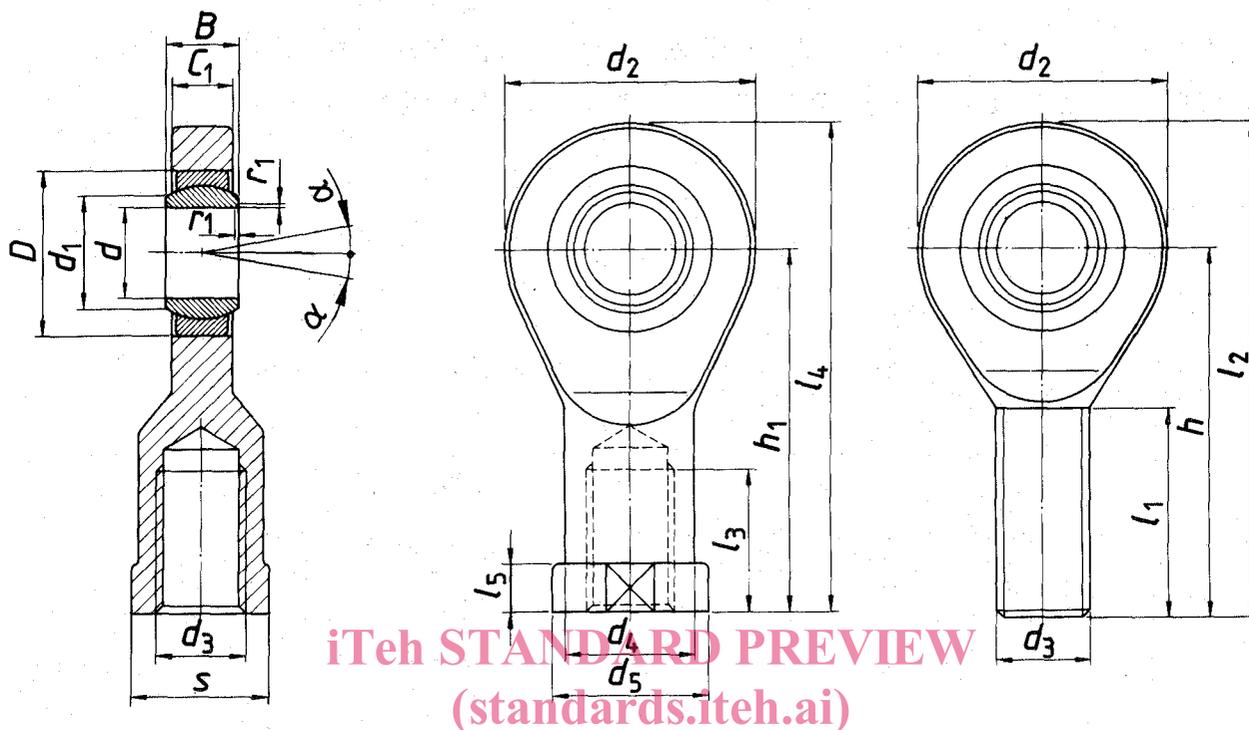


Table 1 — Dimensions

<https://standards.iteh.ai/catalog/standards/sist/6d557686-8ffc-4331-4331-4331> Dimensions in millimetres, angle in degrees

d	With male or female thread						With male thread			With female thread							
	D	d <sub>1</sub> min.	B	r <sub>1</sub> smin	α	d <sub>3</sub>	C <sub>1</sub> max.	d <sub>2</sub> max.	h	l <sub>1</sub> min.	l <sub>2</sub> max.	h <sub>1</sub>	l <sub>3</sub> min.	l <sub>4</sub> max.	l <sub>5</sub> max.	d <sub>4</sub> max.	d <sub>5</sub> max.
5	14	7	6	0,3	13	M 5	4,5	21	36	16	48	30	11	42	5	10	13
6	14	8	6	0,3	13	M 6	4,5	21	36	16	48	30	11	42	5	11	13
8	16	10	8	0,3	15	M 8	6,5	24	42	21	55	36	15	49	5	13	16
10	19	13	9	0,6	12	M 10	7,5	29	48	26	63	43	15	58	6,5	16	19
12	22	15	10	0,6	10	M 12	8,5	34	54	28	71	50	18	67	7	19	22
15	26	18	12	0,6	8	M 14	10,5	40	63	34	83	61	21	81	8	22	26
17	30	20	14	0,6	10	M 16	11,5	46	69	36	92	67	24	90	10	25	29
20	35	24	16	0,6	9	M 20 × 1,5	13,5	53	78	43	105	77	30	104	10	28	34
25	42	29	20	0,6	7	M 24 × 2	18	64	94	53	126	94	36	126	12	35	42
30	47	34	22	0,6	6	M 30 × 2	20	73	110	65	147	110	45	147	15	42	50
35	55	39	25	0,6	6	M 36 × 3	22	82	140	82	182	125	60	167	15	48	58
40	62	45	28	0,6	7	M 39 × 3	24	92	150	86	198	142	65	190	18	52	65
45	68	50	32	0,6	7	M 42 × 3	28	102	163	92	217	145	65	199	20	58	70
50	75	55	35	0,6	6	M 45 × 3	31	112	185	104	246	160	68	221	20	62	75
60	90	66	44	1,0	6	M 52 × 3	39	135	210	115	282	175	70	247	20	70	88
70	105	77	49	1,0	6	M 56 × 4	43	160	235	125	318	200	80	283	20	80	98
80	120	88	55	1,0	6	M 64 × 4	48	180	270	140	365	230	85	325	25	95	110

NOTES

- Bearing dimensions in accordance with dimension series E in ISO 6124.
- Threads may be right or left hand.
- If  $d_4 = d_5$  then  $l_5$  is minimum height of flats.
- Width across flats,  $s$ : values are not specified in this International Standard. They shall, however, be chosen from ISO 272.
- Values of  $\alpha$  are approximate

**Table 2 – Tolerances**

Dimensions and tolerances in millimetres


$d$	$\Delta_{hs}$		$\Delta_{h1s}$		Bearing	$d_3$	$s$
	high	low	high	low			
5	+ 0,80	- 1,20	+ 0,65	- 1,05	Tolerances of the bearing dimensions as specified in ISO 6125	6g external thread 6H internal thread in accordance with ISO 965/1	Tolerances in accordance with ISO 4759/1 product grade C
6	+ 0,80	- 1,20	+ 0,65	- 1,05			
8	+ 0,80	- 1,20	+ 0,80	- 1,20			
10	+ 0,80	- 1,20	+ 0,80	- 1,20			
12	+ 0,80	- 1,20	+ 0,80	- 1,20			
15	+ 0,80	- 1,20	+ 0,80	- 1,20			
17	+ 0,80	- 1,20	+ 0,80	- 1,20			
20	+ 0,80	- 1,20	+ 0,80	- 1,20			
25	+ 1,00	- 1,70	+ 1,00	- 1,70			
30	+ 1,00	- 1,70	+ 1,00	- 1,70			
35	+ 1,40	- 2,10	+ 1,40	- 2,10			
40	+ 1,40	- 2,10	+ 1,40	- 2,10			
45	+ 1,40	- 2,10	+ 1,40	- 2,10			
50	+ 1,80	- 2,70	+ 1,80	- 2,70			
60	+ 1,80	- 2,70	+ 1,80	- 2,70			
70	+ 2,25	- 3,40	+ 2,25	- 3,40			
80	+ 2,25	- 3,40	+ 2,25	- 3,40			

**iTeh STANDARD PREVIEW**  
(standards.iteh.ai)

ISO 6126:1982

<https://standards.iteh.ai/catalog/standards/sist/6d557686-8flc-4341-a339-159f877d1264/iso-6126-1982>

4.2 Spherical plain bearing rod ends, dimension series JK (integral design)

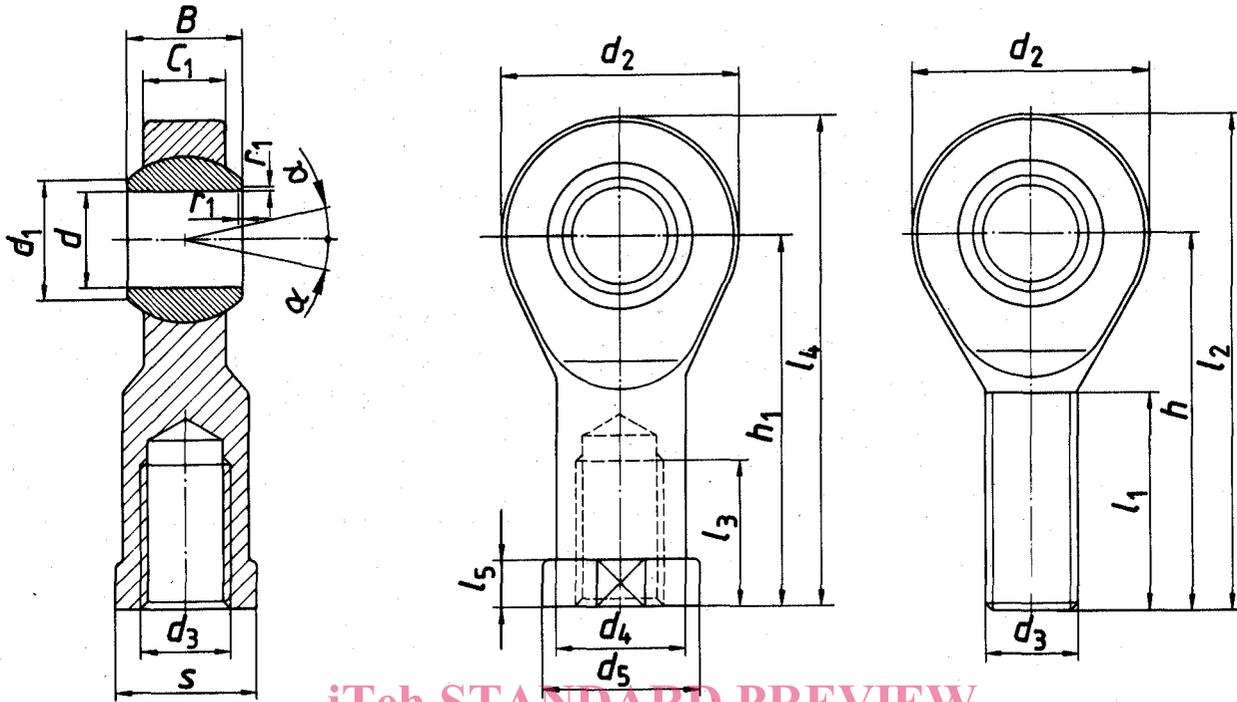

iTeh STANDARD PREVIEW  
(standards.itteh.ai)  
Table 3 — Dimensions

Dimensions in millimetres, angle in degrees

d	With male or female thread					With male thread					With female thread					
	d <sub>1</sub> min.	B	r <sub>1</sub> min.	α	d <sub>3</sub>	C <sub>1</sub> max.	d <sub>2</sub> max.	h	l <sub>1</sub> min.	l <sub>2</sub> max.	h <sub>1</sub>	l <sub>3</sub> min.	l <sub>4</sub> max.	l <sub>5</sub> max.	d <sub>4</sub> max.	d <sub>5</sub> max.
5	7,7	8	0,3	4	M 5	7,5	18	33	19	42	27	8	36	4	9	12
6	8,9	9	0,3	9	M 6	7,5	20	36	21	46	30	9	40	5	10	13
8	10,3	12	0,3	12	M 8	9,5	24	42	25	54	36	12	48	5	12,5	16
10	12,9	14	0,6	10	M 10	11,5	30	48	28	63	43	15	58	6,5	15	19
12	15,4	16	0,6	12	M 12	12,5	34	54	32	71	50	18	67	6,5	17,5	22
14	16,8	19	0,6	14	M 14	14,5	38	60	36	79	57	21	76	8	20	25
16	19,3	21	0,6	14	M 16	15,5	42	66	37	87	64	24	85	8	22	27
18	21,8	23	0,6	13	M 18 × 1,5	17,5	46	72	41	95	71	27	94	10	25	31
20	24,3	25	0,6	14	M 20 × 1,5	18,5	50	78	45	103	77	30	102	10	27,5	34
22	25,8	28	0,6	14	M 22 × 1,5	21	56	84	48	112	84	33	112	12	30	37
25	29,5	31	0,6	14	M 24 × 2	23	60	94	55	124	94	36	124	12	33,5	42
28	32,2	35	0,6	14	M 27 × 2	26	66	103	62	136	103	41	136	14	37	46
30	34,8	37	0,6	15	M 30 × 2	27	70	110	66	145	110	45	145	15	40	50

NOTES

- 1 Threads may be right or left hand.
- 2 If  $d_4 = d_5$ , then  $l_5$  is minimum height of flats.
- 3 Width across flats,  $s$ : values are not specified in this International Standard. They shall, however, be chosen from ISO 272.
- 4 Values of  $\alpha$  are approximate.

Table 4 – Tolerances

Dimensions in millimetres

$d$	$\Delta_{Bs}$		$\Delta_{hs}$		$\Delta_{h1s}$		$d$	$d_3$	$r_1$	$s$
	high	low	high	low	high	low				
5	0	-0,15	+ 0,80	-1,20	+ 0,65	-1,05	H7 in accordance with ISO 286/1	6g external thread 6H internal thread in accordance with ISO 965/1	Maximum chamfer dimension limits in accordance with ISO 582, table 1	Tolerances in accordance with ISO 4759/1 product grade C
6	0	-0,15	+ 0,80	-1,20	+ 0,65	-1,05				
8	0	-0,15	+ 0,80	-1,20	+ 0,80	-1,20				
10	0	-0,15	+ 0,80	-1,20	+ 0,80	-1,20				
12	0	-0,15	+ 0,80	-1,20	+ 0,80	-1,20				
14	0	-0,20	+ 0,80	-1,20	+ 0,80	-1,20				
16	0	-0,20	+ 0,80	-1,20	+ 0,80	-1,20				
18	0	-0,20	+ 0,80	-1,20	+ 0,80	-1,20				
20	0	-0,20	+ 0,80	-1,20	+ 0,80	-1,20				
22	0	-0,20	+ 1,00	-1,70	+ 1,00	-1,70				
25	0	-0,20	+ 1,00	-1,70	+ 1,00	-1,70				
28	0	-0,20	+ 1,00	-1,70	+ 1,00	-1,70				
30	0	-0,20	+ 1,00	-1,70	+ 1,00	-1,70				

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

ISO 6126:1982

<https://standards.iteh.ai/catalog/standards/sist/6d557686-8flc-4341-a339-159f877d1264/iso-6126-1982>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 6126:1982

<https://standards.iteh.ai/catalog/standards/sist/6d557686-8f1c-4341-a339-159f877d1264/iso-6126-1982>