

---

# International Standard



# 6725

---

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

---

## Road vehicles — Dimensions of two-wheeled mopeds and motorcycles — Terms and definitions

*Véhicules routiers — Dimensions des cyclomoteurs et des motocycles à deux roues — Dénominations et définitions*

First edition — 1981-07-01

**ITeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 6725:1981

<https://standards.iteh.ai/catalog/standards/sist/ca1956c0-fbea-46ee-bd85-36270847a00c/iso-6725-1981>

---

UDC 629.118.6 : 001.4

Ref. No. ISO 6725-1981 (E)

**Descriptors** : road vehicles, motorcycles, mopeds, dimensions, definitions, graphic methods, reference planes.

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO member bodies). The work of developing International Standards is carried out through ISO technical committees. Every member body interested in a subject for which a technical committee has been set up has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 6725 was developed by Technical Committee ISO/TC 22, *Road vehicles*, and was circulated to the member bodies in June 1979.

It has been approved by the member bodies of the following countries :

Austria	Italy	South Africa, Rep. of
Belgium	Japan	Spain
Brazil	Korea, Dem. P. Rep. of	Switzerland
Chile	Korea, Rep. of	United Kingdom
Czechoslovakia	Libyan Arab Jamahiriya	USA
France	Netherlands	USSR
Germany, F.R.	Poland	
India	Romania	

No member body expressed disapproval of the document.

## Contents

	Page
1 Scope .....	1
2 Field of application .....	1
3 References .....	1
4 Reference planes and general considerations .....	1
5 Longitudinal median plane (plane <i>Y</i> ) .....	1
6 Terms and definitions .....	3
6.1 Length .....	3
6.2 Width .....	3
6.3 Height .....	3
6.4 Wheel base .....	4
6.5 Front overhang .....	4
6.6 Rear overhang .....	4
6.7 Ground clearance .....	5
6.8 Ramp angle .....	5
6.9 Approach angle .....	5
6.10 Departure angle .....	6
6.11 Castor .....	6
6.12 Castor angle .....	6
6.13 Residual vertical wheel clearance .....	7
6.14 Turning circle diameter .....	7
6.15 Turning clearance circle diameters .....	8
6.16 Banking angle .....	8

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

ISO 6725:1981  
<https://standards.iteh.ai/catalog/standards/sist/ca1956c0-fbec-46cc-bd85-36270847a00c/iso-6725-1981>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

This page intentionally left blank

ISO 6725:1981

<https://standards.iteh.ai/catalog/standards/sist/ca1956c0-fbea-46ee-bd85-36270847a00c/iso-6725-1981>

# Road vehicles — Dimensions of two-wheeled mopeds and motorcycles — Terms and definitions

## 1 Scope

This International Standard defines terms relating to the dimensions of two-wheeled mopeds and motorcycles.

It does not deal with methods of measurement, nor with the units used in reporting the results, nor with the accuracy required or with the order of magnitude of the dimensions defined.

*Y* designates the vertical plane;

*X* designates the plane perpendicular to *Y* and *Z*.

Unless otherwise stated with regard to one or more of the items mentioned below, it should be understood that

a) the supporting surface of the vehicle is horizontal (*Z*), that lengths and widths are measured in the horizontal plane, and that heights are measured in the vertical plane;

b) the total weight of the vehicle is the vehicle kerb weight (see ISO 6726), the load being distributed according to the manufacturer's instructions;

c) the tyres are inflated to the pressure corresponding to the manufacturer's maximum total weight (see ISO 6726);

d) the vehicle is stationary and vertical; its wheels are in the position corresponding to movement in a straight line;

e) the vehicle is new from the factory and normally equipped;

f) both wheels of the vehicle are resting on the supporting surface;

g) the expression "mid-plane of the wheel" designates the plane equidistant from the inner edges of the rim;

h) the expression "centre of the wheel" designates the point of intersection of the mid-plane of the wheel and the axis of rotation of the wheel.

## 2 Field of application

The provisions of this International Standard apply to mopeds and motorcycles as defined in ISO 3833, with the exception of three-wheeled vehicles.

This International Standard does not cover road vehicles which are controlled by a pedestrian or which are used for the carriage of goods to the exclusion of persons.

## 3 References

ISO 3833, *Road vehicles — Types — Terms and definitions*.

ISO 6726, *Road vehicles — Two-wheeled mopeds and motorcycles — Weights — Vocabulary*.

## 4 Reference planes and general considerations

The planes of reference constitute a three-dimensional orthogonal system *X*, *Y*, *Z* (see figures 1 and 2), where

*Z* designates the horizontal plane;

## 5 Longitudinal median plane (plane *Y*)

The vertical plane, *Y*, corresponds to the mid-plane of the rear wheel of the vehicle (see figures 1 and 2).

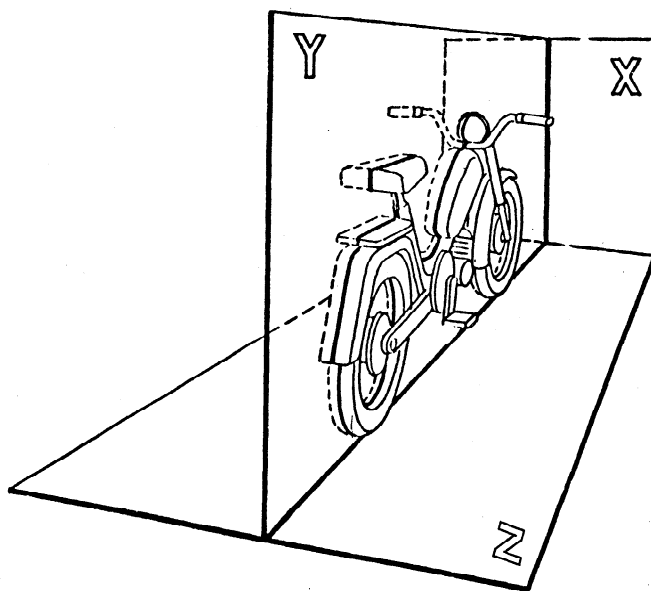


Figure 1 — Illustration of a moped in the three dimensional system  $X, Y, Z$

iTeh STANDARD PREVIEW

(standards.itech.ai)

NOTE — This illustration shows the particular example where the mid-plane of the rear wheel corresponds with the plane  $Y$ .

[ISO 6725:1981](https://standards.itech.ai/catalog/standards/sist/ca1956c0-fbea-46ee-bd85-36270847a00c/iso-6725-1981)

<https://standards.itech.ai/catalog/standards/sist/ca1956c0-fbea-46ee-bd85-36270847a00c/iso-6725-1981>

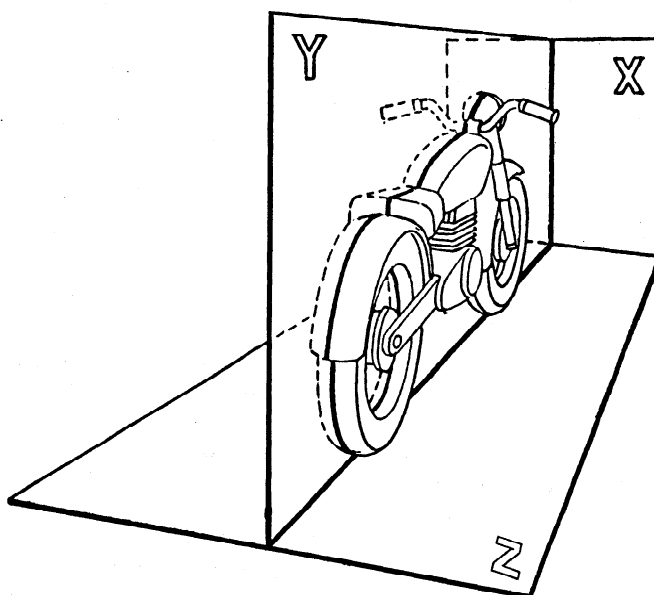
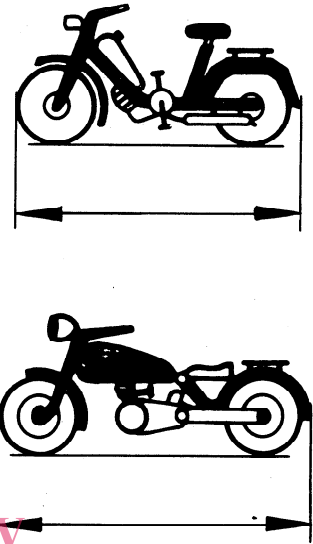
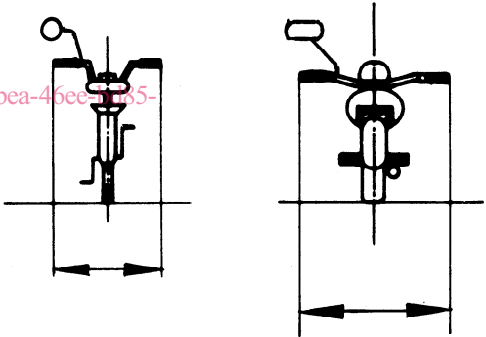
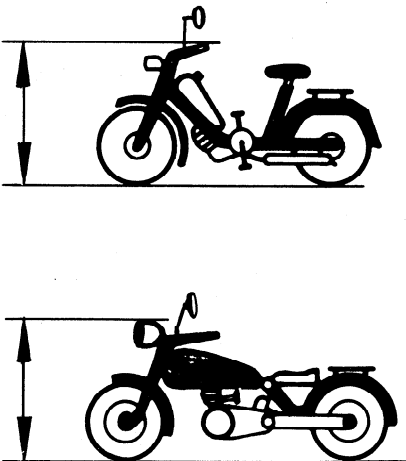
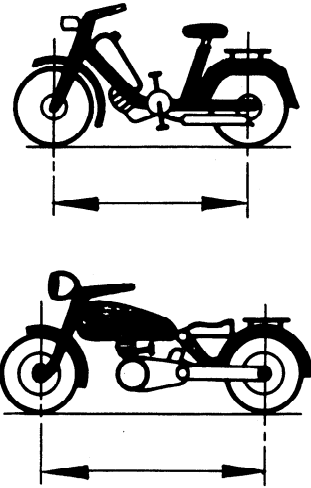
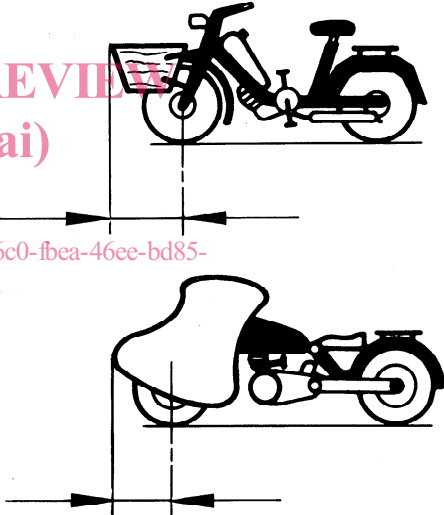
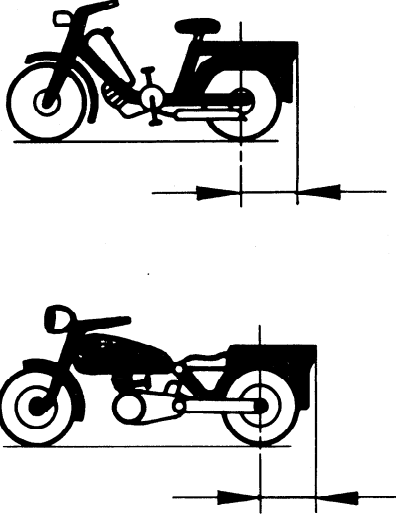


Figure 2 — Illustration of a motorcycle in the three dimensional system  $X, Y, Z$



NOTE — This illustration shows the particular example where the mid-plane of the rear wheel corresponds with the plane  $Y$ .

## 6 Terms and definitions

No.	Term	Definition	Illustration
6.1	Length	<p>The distance between two vertical planes perpendicular to the longitudinal median plane and touching respectively the front and rear of the vehicle.</p> <p>NOTE — All parts of the vehicle and, in particular, any parts projecting to front or rear (mudguards, etc.), are contained between these two planes.</p>	
6.2	Width	<p>The distance between two planes parallel to the longitudinal median plane and touching the vehicle on either side of this plane.</p> <p>NOTE — All parts of the vehicle and, in particular, any lateral projections of fixed parts, are contained between these two planes with the exception of the driving mirror.</p>	
6.3	Height	<p>The distance between the supporting surface and a horizontal plane touching the topmost part of the vehicle.</p> <p>NOTE — All fixed parts of the vehicle are contained between these two planes, with the exception of the driving mirror.</p>	

No.	Term	Definition	Illustration
6.4	Wheel base	The distance between the perpendicular planes projected through the centres of the wheels on- to the supporting surface.	
6.5	Front overhang	The distance between the transverse vertical plane <i>X</i> passing through the centre of the front wheel and the foremost point of the vehicle, taking into consideration any parts rigidly attached to the vehicle.	
6.6	Rear overhang	The distance between the transverse vertical plane <i>X</i> passing through the centre of the rear wheel and the rearmost point of the vehicle taking into consideration the registration number plate or its mounting and any parts rigidly attached to the vehicle.	

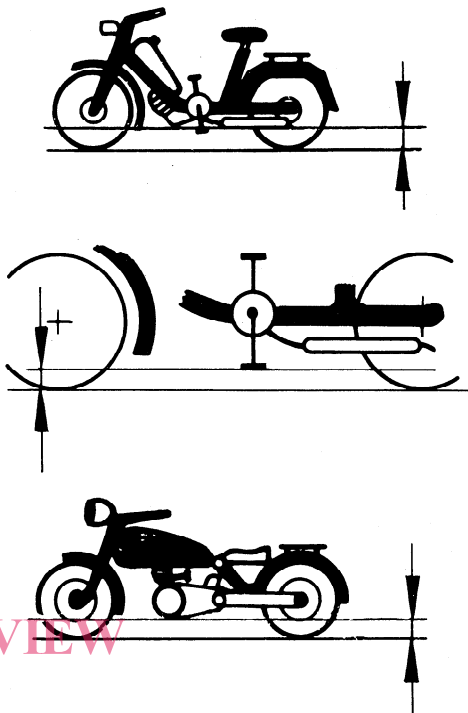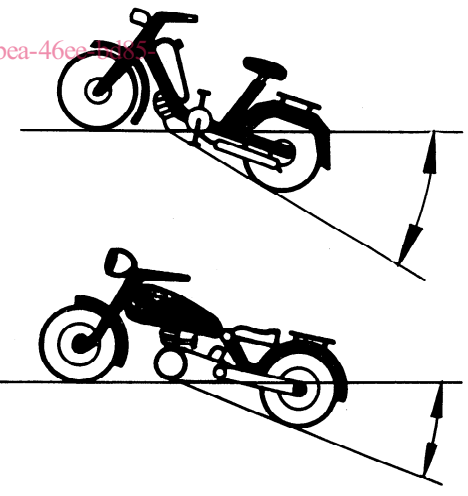

No.	Term	Definition	Illustration
6.7	<b>Ground clearance</b>	<p>The distance between the supporting surface and the lowest point of the vehicle lying within the wheel space, except for the front and rear wheels.</p> <p>In the case of a moped equipped with pedals, the measurement can also be made with the pedal in its lowest position when in use. In this case, the ground clearance is the distance between the lowest surface of the pedal and the supporting surface (see middle illustration).</p> <p>NOTE — The lowest part of the mudguards are not considered in measuring ground clearance.</p>	
6.8	<b>Ramp angle</b>	<p>The minimum acute angle measured between two planes perpendicular to the longitudinal median plane, tangential, respectively, to the tyres of the front and rear wheels, and intersecting at a line touching the lower part of the vehicle, outside these wheels. This angle defines the largest ramp over which the vehicle can move, without taking into consideration the position of the pedals in the case of a moped equipped with pedals.</p>	
6.9	<b>Approach angle</b>	<p>The greatest angle between the supporting surface and the plane tangential to the radius of the front tyre and perpendicular to the longitudinal median plane, so that no part of, nor any part rigidly attached to, the vehicle lies below this plane.</p>	