
International Standard



7758

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Wrought copper and copper alloys — Drawn square bars — Symmetric plus and minus tolerances on width across flats and form tolerances

Cuivre et alliages de cuivre corroyés — Barres étirées de section carrée — Tolérances en plus et en moins symétriques sur surplats et tolérances de forme

iTeh STANDARD PREVIEW

First edition — 1984-12-01

(standards.iteh.ai)

[ISO 7758:1984](#)

<https://standards.iteh.ai/catalog/standards/sist/40bc30bc-a5eb-4328-8c41-32d647acf781/iso-7758-1984>

UDC 669.3-422.41 : 669-124

Ref. No. ISO 7758-1984 (E)

Descriptors : copper, copper alloys, drawn products, metal bars, square bars, width across flats, dimensions, dimensional tolerances, form tolerances.

Price based on 3 pages

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the technical committees are circulated to the member bodies for approval before their acceptance as International Standards by the ISO Council. They are approved in accordance with ISO procedures requiring at least 75 % approval by the member bodies voting.

International Standard ISO 7758 was prepared by Technical Committee ISO/TC 26, *Copper and copper alloys*.

ISO 7758:1984
<https://standards.iteh.ai/catalog/standards/sist/40bc30bc-a5eb-4328-8c41-32d647acf781/iso-7758-1984>

Wrought copper and copper alloys — Drawn square bars — Symmetric plus and minus tolerances on width across flats and form tolerances

iTeh STANDARD PREVIEW
(standards.iteh.ai)

1 Scope and field of application

This International Standard specifies the symmetric plus and minus tolerances on width across flats in the range from 3 up to and including 60 mm and the form tolerances for wrought copper and copper alloy drawn square bars.

2 Reference

ISO 1637, *Wrought copper and copper alloys — Solid products supplied in straight lengths — Mechanical properties*.*

3 Dimensions and tolerances

3.1 Width across flats

Table 1 — Tolerances on width across flats

Values in millimetres

Width across flats		Tolerance	
>	≤	Material group I	Material groups II and III
≥ 3	6	± 0,07	± 0,11
6	10	± 0,08	± 0,12
10	18	± 0,09	± 0,13
18	30	± 0,10	± 0,14
30	50	± 0,13	± 0,18
50	60	± 0,20	± 0,30

* Under revision.

3.2 Corner radii

Square bars may have rounded corners with corner radii according to table 2.

Table 2 — Corner radii

Values in millimetres

Width across flats		Maximum corner radius
>	≤	
≥ 3	6	0,6
6	10	0,8
10	18	1,2
18	30	1,8
30	50	2,8
50	60	4,0

3.3 Twist tolerance

The twist tolerance for square bars with widths across flats in the range from 18 up to and including 60 mm is 3° per metre and 5° per total length for the nominal lengths up to 3000 mm; over 3000 mm nominal lengths, the tolerance shall be agreed.

3.4 Straightness tolerances

3.4.1 Straightness tolerances apply for drawn bars with width across flats equal to or greater than 10 mm for all tempers, except the annealed.

Straightness tolerances for copper and copper alloy bars, except free-machining materials, are given in table 3.

Table 3 — Straightness tolerances (excluding freemachining materials)

Values in millimetres

Nominal length l_{nom}		Maximum curvature (Depth of arc)
>	<	
> 1 000	2 000	2,0 in any length $l_m = 1\,000$
2 000	3 000	5,5 in any length $l_m = 2\,000$
3 000	—	12,0 in any length $l_m = 3\,000$
Local kinks		0,6 in any length $l_m = 300$

Straightness tolerances for freemachining materials (listed in table 7, material group I), are given in table 4.

Table 4 — Straightness tolerances for freemachining materials

Values in millimetres

Nominal length l_{nom}		Maximum curvature (Depth of arc)
>	<	
> 1 000	2 000	2,0 in any length $l_m = 1\,000$
2 000	3 000	4,5 in any length $l_m = 2\,000$
3 000	—	10,0 in any length $l_m = 3\,000$
Local kinks		0,6 in any length $l_m = 300$

3.4.2 The straightness is measured by determining the curvature c against a straightedge having the appropriate length l_m when the bar is lying flat on a base plate, (see the figure).

3.5 Length tolerance

3.5.1 Length as manufactured

For length as manufactured, the tolerances in table 5 apply; permissible underlengths are listed in table 6.

3.5.2 Fixed length

The length of fixed lengths shall be agreed upon between the purchaser and supplier. Fixed lengths shall have a tolerance of + 10 mm.

Table 5 — Length as manufactured

Values in millimetres

Width across flats		Nominal length	Tolerance
>	<		
≥ 3	18	3 000 to 4 000	± 50
18	40		± 100
40	50	2 000 to 4 000	± 200
50	60	2 000 to 3 000	

Table 6 — Permissible underlength

Width across flats mm		Shortest permissible length % of nominal length	Permissible mass of underlengths % of lot mass
>	<		
≥ 3	18	75	20
18	50	50	40
50	60		50

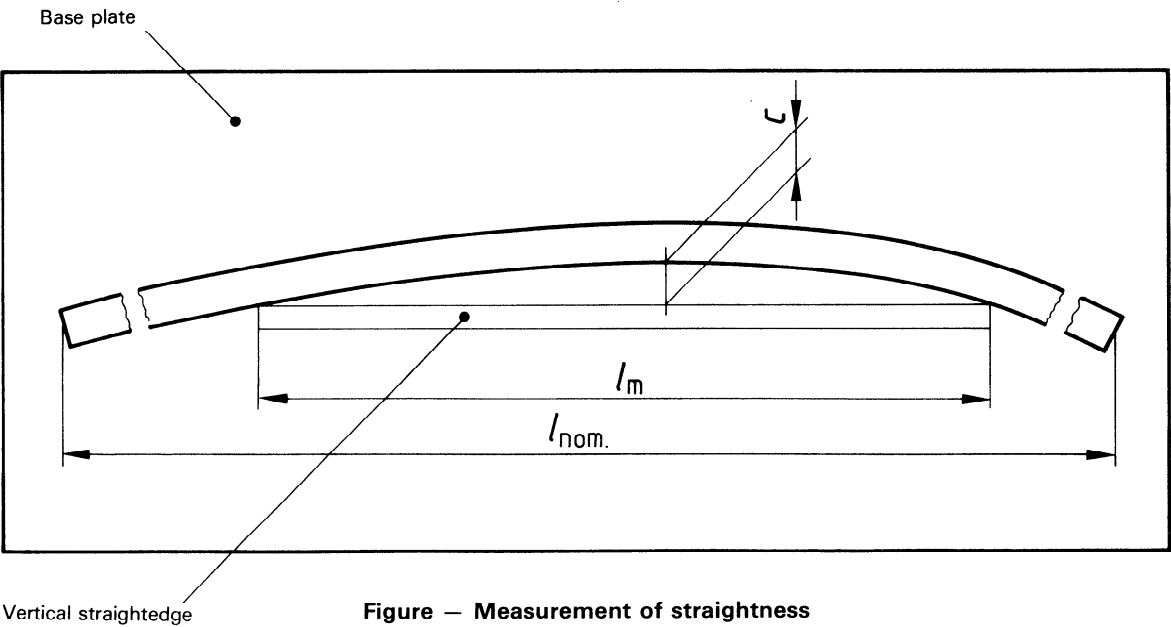


Figure — Measurement of straightness

4 Materials

Drawn square bars according to this International Standard are currently available in commercial quantities in wrought copper and copper alloys listed in table 7.

The mechanical properties of the materials listed are specified in ISO 1637.

The materials are divided into material groups I, II and III as classified in table 7.

Table 7 — Materials

Material group	Type	Designation
I	Coppers (Cu min. 99,85 %)	Cu-ETP Cu-FRHC Cu-FRTP Cu-OF Cu-HCP Cu-DLP Cu-DHP
	Copper-zinc alloys	CuZn37 CuZn40
	Coppers (Cu min. 97,5 %)	CuAg 0,05 CuAg 0,1 CuAg 0,05 (OF) CuAg 0,1 (OF) CuAg 0,05 (P) CuAg 0,1 (P) CuCd 1
		CuS (P0, 01) CuS (P0, 03) CuTe CuTe (P)
	Copper-zinc-lead alloys	CuZn34Pb2 CuZn36Pb3 CuZn40Pb CuZn39Pb1 CuZn38Pb2 CuZn40Pb2 CuZn39Pb3 CuZn38Pb4
II	Coppers (Cu min. 97,5 %)	CuCr1 CuCr1Zr
	Special copper-zinc alloys	CuZn37Sn1Pb1 CuZn38Sn1 CuZn39AlFeMn
	Copper-tin alloys	CuSn5 CuSn6 CuSn8
	Copper-nickel alloys	CuNi30Mn1Fe
	Copper-nickel-zinc alloys	CuNi18Zn19Pb1 CuNi10Zn28Pb1
III	Copper-aluminium alloys	CuAl7Si2 CuAl8Fe3 CuAl9Mn2 CuAl10Fe3 CuAl10Ni5Fe4
	Special copper alloys	CuBe2 CuBe2Pb CuCo2Be CuNi2Be CuNi1Si CuNi2Si CuSi1 CuSi3Mn1

Freemachining material

ISO 7758:1984
<https://standards.iteh.ai/catalog/standards/sist/40bc30bc-a5eb-4c28-bc41-32d647acf781/iso-7758-1984>

iTeh STANDARD PREVIEW
 (standards.iteh.ai)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

This page intentionally left blank

ISO 7758:1984

<https://standards.iteh.ai/catalog/standards/sist/40bc30bc-a5eb-4328-8c41-32d647acf781/iso-7758-1984>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

This page intentionally left blank

ISO 7758:1984

<https://standards.iteh.ai/catalog/standards/sist/40bc30bc-a5eb-4328-8c41-32d647acf781/iso-7758-1984>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

This page intentionally left blank

ISO 7758:1984

<https://standards.iteh.ai/catalog/standards/sist/40bc30bc-a5eb-4328-8c41-32d647acf781/iso-7758-1984>