

# INTERNATIONAL STANDARD

**Industrial communication networks – Fieldbus specifications –  
Part 3-1: Data-link layer service definition – Type 1 elements**

(<https://standards.iteh.ai>)

Document Preview

<https://standards.iteh.ai> IEC 61158-3-1:2007

<https://standards.iteh.ai/catalog/standards/iec/abs3e2c3-bd37-462b-a1de-6ea7edd5b4c8/iec-61158-3-1-2007>

WITHDRAWN



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2007 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland  
Email: [inmail@iec.ch](mailto:inmail@iec.ch)  
Web: [www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: [www.iec.ch/online\\_news/justpub](http://www.iec.ch/online_news/justpub)

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.


- Customer Service Centre: [www.iec.ch/webstore/custserv](http://www.iec.ch/webstore/custserv)

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: [csc@iec.ch](mailto:csc@iec.ch)

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

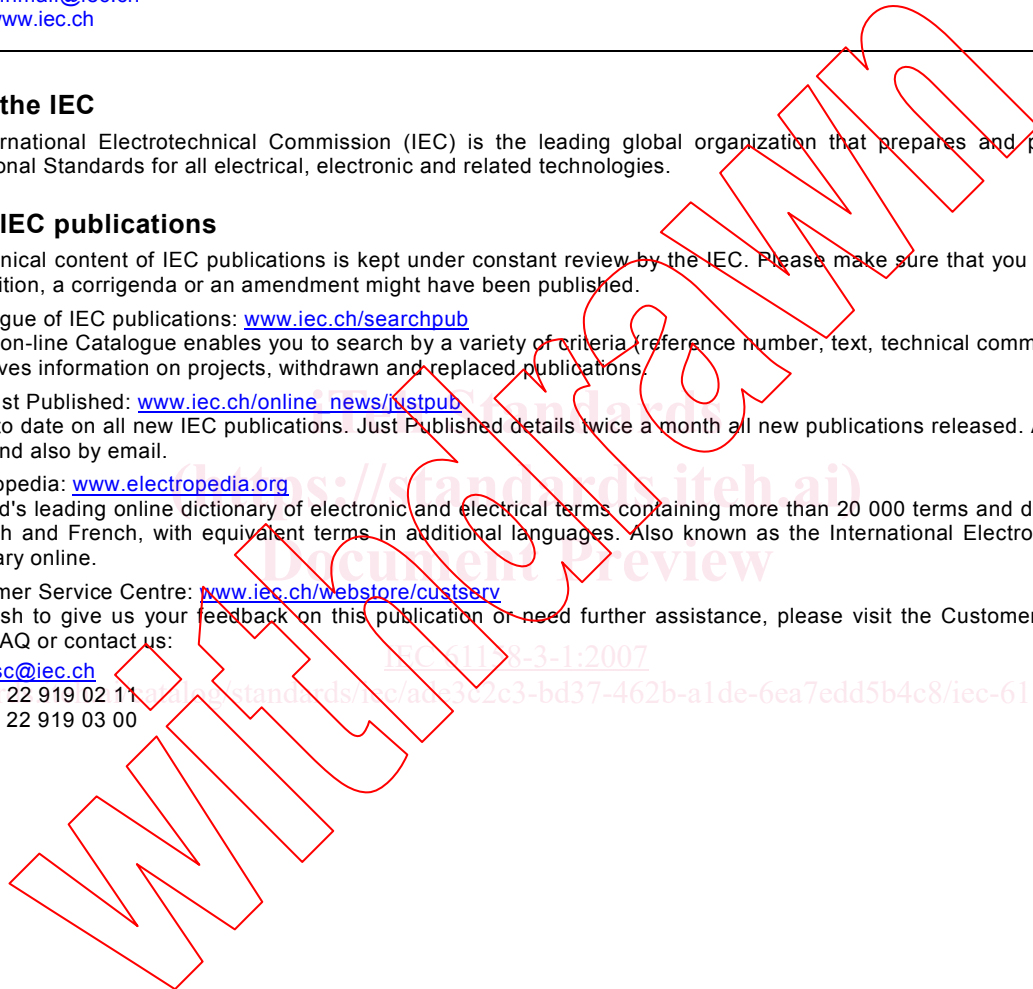

<https://standards.iteh.ai/document/iec/61158-3-1-2007>  
<https://standards.iec/ais3e2c3-bd37-462b-a1de-6ea7edd5b4c8/iec-61158-3-1-2007>

# INTERNATIONAL STANDARD

---

**Industrial communication networks – Fieldbus specifications –  
Part 3-1: Data-link layer service definition – Type 1 elements**

(<https://standards.iteh.ai>)  
Document Preview

<https://standards.iteh.ai> IEC 61158-3-1:2007

<https://standards.iteh.ai/catalog/standards/iec/abs3e2c3-bd37-462b-a1de-6ea7edd5b4c8/iec-61158-3-1-2007>

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

PRICE CODE

**XF**

## CONTENTS


FOREWORD.....	7
0 Introduction .....	9
0.1 General .....	9
0.2 Nomenclature for references within this standard .....	9
1 Scope.....	10
1.1 Overview .....	10
1.2 Specifications .....	10
1.3 Conformance.....	10
2 Normative references.....	11
3 Terms, definitions, symbols, abbreviations and conventions .....	11
3.1 Reference model terms and definitions .....	11
3.2 Service convention terms and definitions .....	13
3.3 Data-link service terms and definitions .....	13
3.4 Common symbols and abbreviations .....	17
3.5 Common conventions .....	17
4 Overview of the data-link layer service .....	19
4.1 General .....	19
4.2 Types and classes of data-link layer service.....	21
4.3 Quality-of-service (QoS) attributes common to multiple types of data-link layer service .....	22
5 DL(SAP)-address, queue and buffer management data-link layer service .....	27
5.1 Facilities of the DL(SAP)-address, queue and buffer management data-link layer service .....	27
5.2 Model of the DL(SAP)-address, queue and buffer management data-link layer service .....	27
5.3 Sequence of primitives at one DLSAP .....	27
5.4 DL(SAP)-address, queue and buffer management facilities .....	29
6 Connection-mode data-link layer service .....	43
6.1 Facilities of the connection-mode data-link layer service .....	43
6.2 Model of the connection-mode data-link layer service.....	44
6.3 Quality of connection-mode service.....	50
6.4 Sequence of primitives .....	56
6.5 Connection establishment phase.....	66
6.6 Connection release phase.....	73
6.7 Data transfer phase .....	79
7 Connectionless-mode data-link layer service .....	90
7.1 Facilities of the connectionless-mode data-link layer service .....	90
7.2 Model of the connectionless-mode data-link layer service.....	91
7.3 Quality of connectionless-mode service .....	92
7.4 Sequence of primitives .....	93
7.5 Connectionless-mode functions .....	95
8 Time and scheduling guidance data-link layer service .....	106
8.1 Facilities and classes of the time and scheduling guidance data-link layer service .....	106
8.2 Model of the time and scheduling guidance data-link layer service.....	107
8.3 Quality of scheduling guidance service.....	107
8.4 Sequence of primitives at one DLE .....	107

8.5	Scheduling guidance functions.....	108
9	DL-management service.....	119
9.1	Scope and inheritance.....	119
9.2	Facilities of the DL-management service.....	119
9.3	Model of the DL-management service.....	119
9.4	Constraints on sequence of primitives.....	119
9.5	Set.....	120
9.6	Get.....	121
9.7	Action.....	121
9.8	Event.....	122
	Bibliography.....	124
	Figure 1 – Relationships of DLSAPs, DLSAP-addresses, DLCEPs, DLCEP-addresses, DLSEP-addresses and group DL-addresses.....	14
	Figure 2 – Example of paths, links, bridges, and the extended link.....	20
	Figure 3 – Types of DL-timeliness In terms of elapsed DL-time and events at the assessing DLCEP.....	25
	Figure 4 – Sequence of primitives for the DL(SAP)-address, queue and buffer management DLS.....	29
	Figure 5 – Supported methods of data management for transmission and delivery.....	30
	Figure 6 – Peer-to-peer and multi-peer DLCs and their DLCEPs.....	43
	Figure 7 – OSI abstract queue model of a peer DLC between a pair of DLS-users.....	45
	Figure 8 – OSI abstract queue model of a multi-peer DLC between a publishing DLS-user and a set of subscribing DLS-users.....	48
	Figure 9 – Summary of DL-connection-mode service primitive time-sequence diagrams for peer DLCs (portion 1).....	59
	Figure 10 – Summary of DL-connection-mode service primitive time-sequence diagrams for peer DLCs (portion 2).....	60
	Figure 11 – Summary of DL-connection-mode service primitive time-sequence diagrams for publishers of a multi-peer DLC (portion 1).....	61
	Figure 12 – Summary of DL-connection-mode service primitive time-sequence diagrams for publishers of a multi-peer DLC (portion 2).....	62
	Figure 13 – Summary of additional DL-connection-mode service primitive time-sequence diagrams for a multi-peer DLC subscriber where the diagrams differ from the corresponding ones for a publisher (portion 1).....	63
	Figure 14 – Summary of additional DL-connection-mode service primitive time-sequence diagrams for a multi-peer DLC subscriber where the diagrams differ from the corresponding ones for a publisher (portion 2).....	64
	Figure 15 – State transition diagram for sequences of DL-connection-mode service primitives at a DLCEP.....	65
	Figure 16 – Peer DLC/DLCEP establishment initiated by a single DLS-user.....	71
	Figure 17 – Multi-peer DLC/DLCEP establishment initiated by the publishing DLS-user.....	71
	Figure 18 – Multi-peer DLC/DLCEP establishment initiated by a subscribing DLS-user.....	72
	Figure 19 – Multi-peer DLC/DLCEP establishment using known DLCEP addresses initiated first by the publishing DLS-user.....	72
	Figure 20 – Multi-peer DLC/DLCEP establishment using known DLCEP addresses initiated first by one or more subscribing DLS-users.....	72
	Figure 21 – Peer DLC/DLCEP establishment initiated simultaneously by both peer DLS-users, resulting in a merged DLC.....	72

Figure 22 – Multi-peer DLC/DLCEP establishment initiated simultaneously by both publishing and subscribing DLS-users, resulting in a merged DLC .....	73
Figure 23 – Peer DLS-user invocation .....	75
Figure 24 – Publishing DLS-user invocation.....	75
Figure 25 – Subscribing DLS-user invocation.....	76
Figure 26 – Simultaneous invocation by both DLS-users .....	76
Figure 27 – Peer DLS-provider invocation.....	76
Figure 28 – Publishing DLS-provider invocation .....	76
Figure 29 – Subscribing DLS-provider invocation.....	76
Figure 30 – Simultaneous peer DLS-user and DLS-provider invocations .....	76
Figure 31 – Simultaneous publishing DLS-user and DLS-provider invocations .....	76
Figure 32 – Simultaneous subscribing DLS-user and DLS-provider invocations.....	76
Figure 33 – Sequence of primitives in a peer DLS-user rejection of a DLC/DLCEP establishment attempt .....	77
Figure 34 – Sequence of primitives in a publishing DLS-user rejection of a DLC/DLCEP establishment attempt .....	77
Figure 35 – Sequence of primitives in a subscribing DLS-user rejection of a DLC/DLCEP establishment attempt .....	77
Figure 36 – Sequence of primitives in a DLS-provider rejection of a DLC/DLCEP establishment attempt .....	77
Figure 37 – Sequence of primitives in a DLS-user cancellation of a DLC/DLCEP establishment attempt: both primitives are destroyed in the queue .....	78
Figure 38 – Sequence of primitives in a DLS-user cancellation of a DLC/DLCEP establishment attempt: DL-DISCONNECT indication arrives before DL-CONNECT response is sent.....	78
Figure 39 – Sequence of primitives in a DLS-user cancellation of a DLC/DLCEP establishment attempt: peer DL-DISCONNECT indication arrives after DL-CONNECT response is sent.....	78
Figure 40 – Sequence of primitives in a DLS-user cancellation of a DLC/DLCEP establishment attempt: publisher’s DL-DISCONNECT indication arrives after DL-CONNECT response is sent.....	78
Figure 41 – Sequence of primitives in a DLS-user cancellation of a DLC/DLCEP establishment attempt: subscriber’s DL-DISCONNECT request arrives after DL-CONNECT request has been communicated to the publisher .....	79
Figure 42 – Sequence of primitives for a CLASSICAL or DISORDERED peer-to-peer queue-to-queue data transfer .....	81
Figure 43 – Sequence of primitives for an ORDERED or UNORDERED peer-to-peer, or an UNORDERED subscriber-to-publisher queue-to-queue data transfer .....	81
Figure 44 – Sequence of primitives for a publisher-to-subscribers queue-to-queue data transfer .....	81
Figure 45 – Sequence of primitives for a failed queue-to-queue data transfer.....	82
Figure 46 – Sequence of primitives for an ORDERED or UNORDERED peer to peer, or an UNORDERED subscriber to publisher, buffer to buffer data transfer .....	83
Figure 47 – Sequence of primitives for a publisher to subscribers buffer to buffer data transfer .....	83
Figure 48 – Sequence of primitives for an ORDERED or UNORDERED peer to peer, or an UNORDERED subscriber to publisher, buffer to queue data transfer.....	83
Figure 49 – Sequence of primitives for a publisher to subscribers buffer to queue data transfer .....	83
Figure 50 – Sequence of primitives in a peer DLS-user initiated Reset.....	87

Figure 51 – Sequence of primitives in a publishing DLS-user initiated Reset .....	87
Figure 52 – Sequence of primitives in a subscribing DLS-user initiated Reset .....	87
Figure 53 – Sequence of primitives in a simultaneous peer DLS-users initiated Reset.....	87
Figure 54 – Sequence of primitives in a simultaneous multi-peer DLS-users initiated Reset .....	87
Figure 55 – Sequence of primitives in a peer DLS-provider initiated Reset .....	88
Figure 56 – Sequence of primitives in a publishing DLS-provider initiated Reset .....	88
Figure 57 – Sequence of primitives in a subscribing DLS-provider initiated Reset.....	88
Figure 58 – Sequence of primitives in a simultaneous peer DLS-user and DLS-provider initiated Reset .....	88
Figure 59 – Sequence of primitives in a simultaneous publishing DLS-user and DLS- provider initiated Reset.....	88
Figure 60 – Sequence of primitives in a simultaneous subscribing DLS-user and DLS- provider initiated Reset.....	89
Figure 61 – Sequence of primitives for Subscriber Query.....	90
Figure 62 – Model for a data-link layer connectionless-mode unitdata transmission or unitdata exchange .....	91
Figure 63 – Summary of DL-connectionless-mode service primitive time-sequence diagrams .....	94
Figure 64 – State transition diagram for sequences of connectionless-mode primitives at one DLSAP .....	95
Figure 65 – Sequence of primitives for a successful locally-acknowledged connectionless-mode unitdata transfer.....	98
Figure 66 – Sequence of primitives for a successful remotely-acknowledged connectionless-mode unitdata transfer.....	99
Figure 67 – Sequence of primitives for an unsuccessful connectionless-mode unitdata transfer .....	99
Figure 68 – Sequence of primitives for connectionless-mode unitdata exchange .....	104
Figure 69 – Sequence of primitives for connectionless-mode listener query .....	105
Figure 70 – Summary of time and scheduling-guidance service primitive time sequence diagrams .....	108
Figure 71 – Sequence of primitives for DL-time .....	110
Figure 72 – Sequence of primitives for the Compel-Service service .....	112
Figure 73 – Sequence of primitives for the sequence scheduling services.....	116
Figure 74 – Sequence of primitives for the DLM action service .....	119
Table 1 – Summary of DL(SAP)-address, queue and buffer management primitives and parameters.....	28
Table 2 – DL-buffer-and-queue-management create primitive and parameters .....	30
Table 3 – DL-buffer-and-queue-management delete primitive and parameters .....	33
Table 4 – DL(SAP)-address-management bind primitive and parameters .....	34
Table 5 – DL(SAP)-role constraints on DLSAPs, DLCEPs and other DLS Primitives.....	35
Table 6 – DL(SAP)-address-management unbind primitive and parameters .....	38
Table 7 – DL-buffer-management put primitive and parameters .....	39
Table 8 – DL-buffer-and-queue-management get primitive and parameters.....	40
Table 9 – Relationships between abstract queue model objects .....	46
Table 10 – Attributes and class requirements of DLCEP data delivery features .....	52

Table 11 – Summary of DL-connection-mode primitives and parameters (portion 1).....	57
Table 12 – Summary of DL-connection-mode primitives and parameters (portion 2).....	58
Table 13 – DLC / DLCEP establishment primitives and parameters (portion 1).....	67
Table 14 – DLC / DLCEP establishment primitives and parameters (portion 2).....	67
Table 15 – DLC / DLCEP release primitives and parameters.....	74
Table 16 – Queue data transfer primitive and parameters.....	79
Table 17 – Buffer sent primitive and parameter.....	82
Table 18 – Buffer received primitive and parameter.....	82
Table 19 – DLC/DLCEP reset primitives and parameters (portion 1).....	84
Table 20 – DLC/DLCEP reset primitives and parameters (portion 2).....	84
Table 21 – Subscriber query primitives and parameters.....	89
Table 22 – Summary of DL-connectionless-mode primitives and parameters.....	93
Table 23 – DL-connectionless-mode unitdata transfer primitives and parameters.....	96
Table 24 – DL-connectionless-mode unitdata exchange primitive and parameters.....	100
Table 25 – Listener query primitives and parameters.....	105
Table 26 – Summary of DL-scheduling-guidance primitives and parameters.....	107
Table 27 – DL-time primitive and parameters.....	109
Table 28 – DL-scheduling-guidance Compel-service primitive and parameters.....	110
Table 29 – DL-scheduling-guidance Schedule Sequence primitives and parameters.....	113
Table 30 – DL-scheduling-guidance Cancel Schedule primitives and parameters.....	116
Table 31 – DL-scheduling-guidance Subset Sequence primitives and parameters.....	117
Table 32 – Summary of DL-management primitives and parameters.....	120
Table 33 – DLM-Set primitive and parameters.....	120
Table 34 – DLM-Get primitive and parameters.....	121
Table 35 – DLM-Action primitive and parameters.....	122
Table 36 – DLM-Event primitive and parameters.....	123

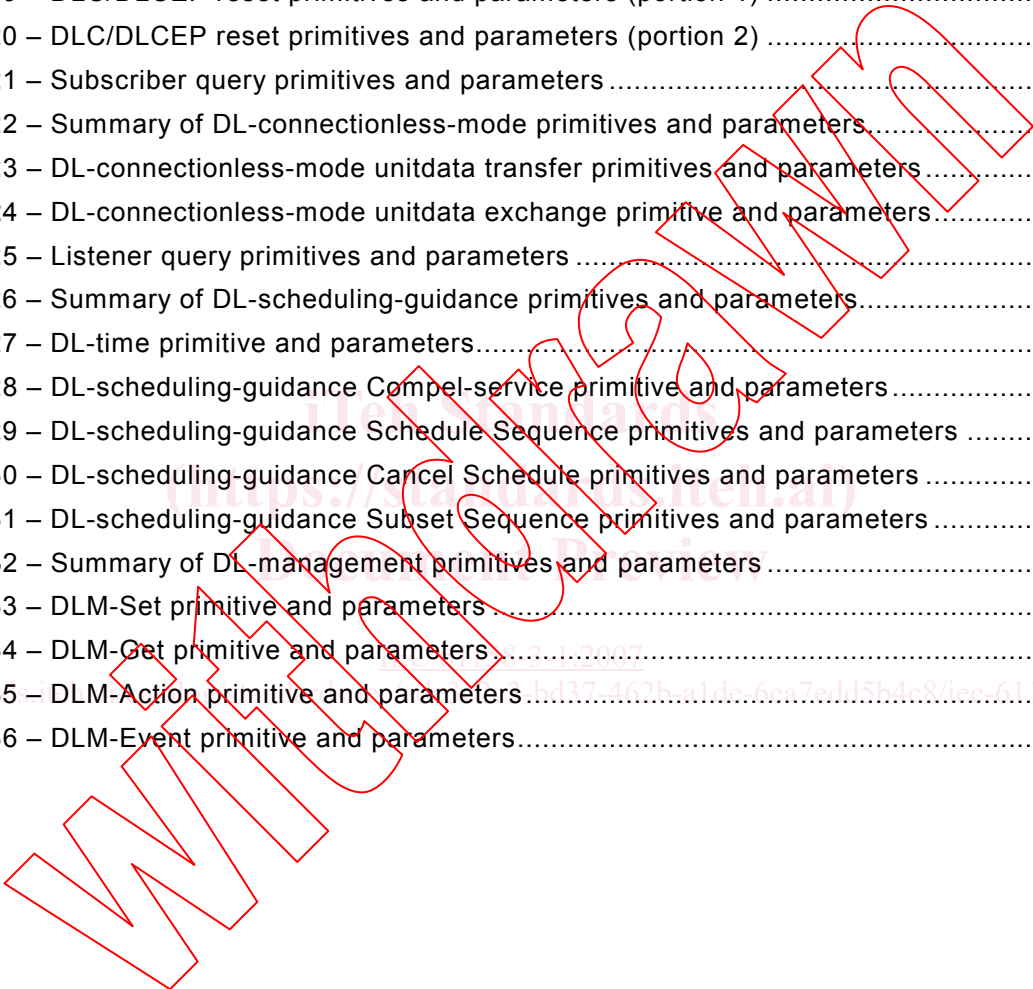



## INTERNATIONAL ELECTROTECHNICAL COMMISSION

**INDUSTRIAL COMMUNICATION NETWORKS –  
FIELDBUS SPECIFICATIONS –****Part 3-1: Data-link layer service definition – Type 1 elements**

## FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

NOTE Use of some of the associated protocol types is restricted by their intellectual-property-right holders. In all cases, the commitment to limited release of intellectual-property-rights made by the holders of those rights permits a particular data-link layer protocol type to be used with physical layer and application layer protocols in type combinations as specified explicitly in the IEC 61784 series. Use of the various protocol types in other combinations may require permission of their respective intellectual-property-right holders.

International Standard IEC 61158-3-1 has been prepared by subcommittee 65C: Industrial networks, of IEC technical committee 65: Industrial-process measurement, control and automation.

This first edition and its companion parts of the IEC 61158-3 subseries cancel and replace IEC 61158-3:2003. This edition of this part constitutes an editorial revision.

This edition includes the following significant changes from the previous edition:

- a) deletion of the former Type 6 fieldbus, and the placeholder for a Type 5 fieldbus data-link layer, for lack of market relevance;
- b) addition of new types of fieldbuses;
- c) division of this part into multiple parts numbered 3-1, 3-2, ..., 3-19.

The text of this standard is based on the following documents:

FDIS	Report on voting
65C/473/FDIS	65C/484/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with ISO/IEC Directives, Part 2.

NOTE Slight variances from the directives have been allowed by the IEC Central Office to provide continuity of subclause numbering with prior editions.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under <http://webstore.iec.ch> in the data related to the specific publication. At this date, the publication will be:

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

NOTE The revision of this standard will be synchronized with the other parts of the IEC 61158 series.

The list of all the parts of the IEC 61158 series, under the general title *Industrial communication networks – Fieldbus specifications*, can be found on the IEC web site.

IEC Standards  
(<https://standards.iteh.ai>)  
Document Preview

IEC 61158-3-1:2007

<https://standards.iteh.ai/catalog/standards/iec/a6c3e2c3-bd37-462b-a1de-6ea7edd5b4c8/iec-61158-3-1-2007>

WITHDRAWN

## 0 Introduction

### 0.1 General

This part of IEC 61158 is one of a series produced to facilitate the interconnection of automation system components. It is related to other standards in the set as defined by the “three-layer” fieldbus reference model described in IEC/TR 61158-1.

Throughout the set of fieldbus standards, the term “service” refers to the abstract capability provided by one layer of the OSI Basic Reference Model to the layer immediately above. Thus, the data-link layer service defined in this standard is a conceptual architectural service, independent of administrative and implementation divisions.

### 0.2 Nomenclature for references within this standard

Clauses, including annexes, can be referenced in their entirety, including any subordinate subclauses, as “Clause N” or “Annex N”, where N is the number of the clause or letter of the annex.

Subclauses can be referenced in their entirety, including any subordinate subclauses, as “N.M” or “N.M.P” and so forth, depending on the level of the subclause, where N is the number of the subclause or letter of the annex, and M, P and so forth represent the successive levels of subclause up to and including the subclause of interest.

When a clause or subclause contains one or more subordinate subclauses, the text between the clause or subclause heading and its first subordinate subclause can be referenced in its entirety as “N.0” or “N.M.0” or “N.M.P.0” and so forth, where N, M and P are as above. Stated differently, a reference ending with “0” designates the text and figures between a clause or subclause header and its first subordinate subclause.

NOTE This nomenclature provides a means of referencing text in hanging clauses. Such clauses existed in earlier editions of IEC 61158-3, Type 1 clauses. Those hanging clauses are maintained in this edition to minimize the disruption to existing national and multi-national standards and consortia documents which reference that prior subclause numbering.

# INDUSTRIAL COMMUNICATION NETWORKS – FIELDBUS SPECIFICATIONS –

## Part 3-1: Data-link layer service definition – Type 1 elements

### 1 Scope

#### 1.1 Overview

This part of IEC 61158 provides common elements for basic time-critical messaging communications between devices in an automation environment. The term “time-critical” is used to represent the presence of a time-window, within which one or more specified actions are required to be completed with some defined level of certainty. Failure to complete specified actions within the time window risks failure of the applications requesting the actions, with attendant risk to equipment, plant and possibly human life.

This standard defines in an abstract way the externally visible service provided by the Type 1 fieldbus data-link layer in terms of

- a) the primitive actions and events of the service;
- b) the parameters associated with each primitive action and event, and the form which they take; and
- c) the interrelationship between these actions and events, and their valid sequences.

The purpose of this standard is to define the services provided to

- the Type 1 fieldbus application layer at the boundary between the application and data-link layers of the fieldbus reference model;
- systems management at the boundary between the data-link layer and systems management of the fieldbus reference model.

#### 1.2 Specifications

The principal objective of this standard is to specify the characteristics of conceptual data-link layer services suitable for time-critical communications, and thus supplement the OSI Basic Reference Model in guiding the development of data-link protocols for time-critical communications. A secondary objective is to provide migration paths from previously existing industrial communications protocols.

This specification may be used as the basis for formal DL-Programming-Interfaces. Nevertheless, it is not a formal programming interface, and any such interface will need to address implementation issues not covered by this specification, including

- a) the sizes and octet ordering of various multi-octet service parameters;
- b) the correlation of paired request and confirm, or indication and response, primitives.

#### 1.3 Conformance

This standard does not specify individual implementations or products, nor does it constrain the implementations of data-link entities within industrial automation systems.

There is no conformance of equipment to this data-link layer service definition standard. Instead, conformance is achieved through implementation of the corresponding data-link protocol that fulfills the Type 7 data-link layer services defined in this standard.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 7498-1, *Information technology – Open Systems Interconnection – Basic Reference Model: The Basic Model*

ISO/IEC 7498-3, *Information technology – Open Systems Interconnection – Basic Reference Model: Naming and addressing*

ISO/IEC 10731:1994, *Information technology – Open Systems Interconnection – Conventions for the definition of OSI services*

## 3 Terms, definitions, symbols, abbreviations and conventions

For the purposes of this document, the following terms, definitions, symbols, abbreviations and conventions apply.

### 3.1 Reference model terms and definitions

This standard is based in part on the concepts developed in ISO/IEC 7498-1 and ISO/IEC 7498-3, and makes use of the following terms defined therein.

<b>3.1.1 DL-address</b>	[7498-3]
<b>3.1.2 DL-address-mapping</b>	[7498-1]
<b>3.1.3 called-DL-address</b>	[7498-3]
<b>3.1.4 calling-DL-address</b>	[7498-3]
<b>3.1.5 centralized multi-end-point-connection</b>	[7498-1]
<b>3.1.6 DL-connection</b>	[7498-1]
<b>3.1.7 DL-connection-end-point</b>	[7498-1]
<b>3.1.8 DL-connection-end-point-identifier</b>	[7498-1]
<b>3.1.9 DL-connection-mode transmission</b>	[7498-1]
<b>3.1.10 DL-connectionless-mode transmission</b>	[7498-1]
<b>3.1.11 correspondent (N)-entities</b>	[7498-1]
<b>correspondent DL-entities (N=2)</b>	
<b>correspondent Ph-entities (N=1)</b>	
<b>3.1.12 DL-duplex-transmission</b>	[7498-1]
<b>3.1.13 (N)-entity</b>	[7498-1]
<b>DL-entity (N=2)</b>	
<b>Ph-entity (N=1)</b>	
<b>3.1.14 DL-facility</b>	[7498-1]
<b>3.1.15 flow control</b>	[7498-1]

<b>3.1.16 (N)-layer</b>	[7498-1]
<b>DL-layer (N=2)</b>	
<b>Ph-layer (N=1)</b>	
<b>3.1.17 layer-management</b>	[7498-1]
<b>3.1.18 DL-local-view</b>	[7498-3]
<b>3.1.19 DL-name</b>	[7498-3]
<b>3.1.20 naming-(addressing)-domain</b>	[7498-3]
<b>3.1.21 peer-entities</b>	[7498-1]
<b>3.1.22 primitive name</b>	[7498-3]
<b>3.1.23 DL-protocol</b>	[7498-1]
<b>3.1.24 DL-protocol-connection-identifier</b>	[7498-1]
<b>3.1.25 DL-protocol-data-unit</b>	[7498-1]
<b>3.1.26 DL-relay</b>	[7498-1]
<b>3.1.27 reset</b>	[7498-1]
<b>3.1.28 responding-DL-address</b>	[7498-3]
<b>3.1.29 routing</b>	[7498-1]
<b>3.1.30 segmenting</b>	[7498-1]
<b>3.1.31 (N)-service</b>	[7498-1]
<b>DL-service (N=2)</b>	
<b>Ph-service (N=1)</b>	
<b>3.1.32 (N)-service-access-point</b>	[7498-1]
<b>DL-service-access-point (N=2)</b>	
<b>Ph-service-access-point (N=1)</b>	
<b>3.1.33 DL-service-access-point-address</b>	[7498-3]
<b>3.1.34 DL-service-connection-identifier</b>	[7498-1]
<b>3.1.35 DL-service-data-unit</b>	[7498-1]
<b>3.1.36 DL-simplex-transmission</b>	[7498-1]
<b>3.1.37 DL-subsystem</b>	[7498-1]
<b>3.1.38 systems-management</b>	[7498-1]
<b>3.1.39 DLS-user-data</b>	[7498-1]

ITeH Standards  
(<https://standards.iteh.ai>)  
Document Preview

<https://standards.iteh.ai/catalog/standards/iec/abs3e2c3-bd37-462b-a1de-6ea7edd5b4c8/iec-61158-3-1-2007>