

INTERNATIONAL
STANDARD

ISO
4589-3

First edition
1996-08-15

**Plastics — Determination of burning
behaviour by oxygen index —**

Part 3:
Elevated-temperature test
(standards.iteh.ai)

*Plastiques — Détermination du comportement au feu au moyen de
l'indice d'oxygène —
Partie 3: Essai à haute température*

INTERNATIONAL

ISO



Reference number
ISO 4589-3:1996(E)

Contents

	Page
1 Scope	1
2 Normative reference	1
3 Definitions	2
4 Principle	2
5 Apparatus	2
6 Calibration and maintenance of equipment	3
7 Preparation of test specimens	3
8 Procedure	3
9 Calculations and expression of results	4
10 Procedure C — Comparison with a specified minimum value of the oxygen index at a specified temperature (short procedure) ...	4
11 Precision	4
12 Test report	4

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Annexes

ISO 4589-3:1996

A Measurement of flammability temperature (FT)	12
B Interlaboratory test data on flammability temperature	14
C Typical test results sheet	15

https://standards.iteh.ai/catalog/standards/sist/61a9a31f-e8af-4de0-80ba-669d842bb598/iso-4589-3-1996

© ISO 1996

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 4589-3 was prepared by Technical Committee ISO/TC 61, *Plastics*, Subcommittee SC 4, *Burning behaviour*.

Together with parts 1 and 2, this part of ISO 4589 cancels and replaces ISO 4589:1984.

ISO 4589 consists of the following parts, under the general title *Plastics — Determination of burning behaviour by oxygen index*:

- Part 1: *Guidance*
- Part 2: *Ambient-temperature test*
- Part 3: *Elevated-temperature test*

Annex A forms an integral part of this part of ISO 4589. Annexes B and C are for information only.

Introduction

This part of ISO 4589 has been prepared to extend the methods available for the determination of flammability by oxygen index (see ISO 4589-2) to typical elevated temperatures to which a plastic material can be exposed in a service situation. It also provides a method for determining the temperature at which combustion of a small bar of material is just supported in air under certain test conditions; the resulting temperature is termed the flammability temperature.

This part of ISO 4589 is intended to be used in conjunction with ISO 4589-2 which describes the basic oxygen index test method.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 4589-3:1996

<https://standards.iteh.ai/catalog/standards/sist/61a9a31f-e8af-4de0-80ba-669d842bb598/iso-4589-3-1996>

Plastics — Determination of burning behaviour by oxygen index —

Part 3: Elevated-temperature test

1 Scope

This part of ISO 4589 specifies methods for determining the minimum concentration of oxygen, in a mixture with nitrogen, that will support combustion of small vertical test specimens under specified test conditions over a range of temperatures typically between 25 °C and 150 °C. The results are defined as oxygen index values at the test temperature, which is typical of the practical temperature that a plastic material may experience in an overheated service situation.

Methods are provided for testing materials that are self-supporting at the test temperature in the form of vertical bars or sheet up to 10,5 mm thick. These methods are suitable for solid, laminated or cellular materials characterized by an apparent density greater than 100 kg/m³. The methods may also be applicable to some cellular materials having an apparent density of less than 100 kg/m³. A method is provided for testing flexible sheet or film materials while supported vertically.

This part of ISO 4589 also includes a method (see annex A) for determining the temperature at which the oxygen index of small vertical test specimens in air is 20,9 under specified test conditions. The result is defined as the flammability temperature (FT) and the method is limited to the determination of results less than 400 °C. The method is not applicable to materials having an oxygen index of < 20,9 when measured at 23 °C.

Results obtained in accordance with this part of ISO 4589 should not be used to describe or appraise

the fire hazard presented by a particular material or shape under actual fire conditions, unless used as one element of a fire risk assessment which takes into account all of the factors which are pertinent to the assessment of the fire hazard of a particular application for the material.

NOTES

1 It may not be possible to apply these methods satisfactorily to materials that exhibit high levels of shrinkage when heated, e.g. highly oriented thin film.

2 For assessing the flame propagation properties of cellular materials of density < 100 kg/m³, attention is drawn to the method of ISO 3582:1978, *Cellular plastic and cellular rubber materials — Laboratory assessment of horizontal burning characteristics of small specimens subjected to a small flame*.

2 Normative reference

The following standard contains provisions which, through reference in this text, constitute provisions of this part of ISO 4589. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this part of ISO 4589 are encouraged to investigate the possibility of applying the most recent edition of the standard indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 4589-2:1996, *Plastics — Determination of burning behaviour by oxygen index — Part 2: Ambient-temperature test*.

3 Definitions

For the purposes of this part of ISO 4589, the following definitions apply.

3.1 flammability temperature (FT): The temperature at which combustion of a material is just supported in air under specified test conditions.

3.2 oxygen index at elevated temperature: The minimum concentration of oxygen, by volume percentage, in a mixture of oxygen and nitrogen, introduced at an agreed test temperature of greater than 25 °C, that will just support combustion of a material under specified test conditions.

3.3 ignition: The initiation of flaming combustion.

4 Principle

A small test specimen is supported vertically in a mixture of oxygen and nitrogen flowing upwards through a transparent heated chimney. The upper end of the specimen is ignited and the subsequent burning behaviour of the specimen is observed to compare the period for which burning continues, or the length of specimen burnt, with specified limits for such burning. By testing a series of specimens in different oxygen concentrations, the minimum oxygen concentration is estimated.

5 Apparatus

5.1 Arrangement. The apparatus specified in 5.2 to 5.5 shall be arranged as indicated by the diagrams in figures 1 to 4, as appropriate.

5.2 Test chimney, consisting of two concentric heat-resistant glass tubes supported vertically between an insulating top plate and a base through which oxygen-containing gas mixtures can be introduced. The chimney is provided with a heating element suitable for use, in conjunction with a preheater for heating the incoming gas mixture, to maintain the test atmosphere within the inner tube in the vicinity of the test specimen at within ± 2 °C of any specific test temperature up to and including 125 °C and at within ± 3 °C of any higher test temperature at which the equipment is intended to be used. The heating element shall not impede adequate observation of a test specimen under test.

The preferred dimensions of the inner tube are 450 mm minimum height and 75 mm minimum-diameter cylindrical bore. The upper outlet should preferably be restricted as necessary by an overhead

cap having an outlet small enough to produce an exhaust velocity of at least 90 mm/s from a flow rate within the chimney of 40 mm/s (see note 3). The height of the outer tube should be similar to that of the inner tube and the radial clearance between the inner and outer tubes should be between 5 mm and 10 mm. Chimneys of other dimensions, with or without restricted outlets, may be used, if shown to give equivalent results.

The bottom of the chimney, or the base upon which the chimney is supported, shall incorporate a means for distributing evenly the gas mixture entering the inner tube. A satisfactory means comprises beads of diameter between 3 mm and 5 mm, in a layer between 80 mm and 100 mm deep. Other devices, such as radial manifolds, may be used, if shown to give equivalent results.

A porous screen may be mounted below the level of the test piece holder, to prevent falling combustion debris from fouling the gas entry and distribution paths.

The chimney support may incorporate a levelling device and indicator, to facilitate vertical alignment of the chimney and a test piece supported therein. A dark background may be provided, to facilitate observation of flames within the chimney.

NOTE 3 For inner tubes of diameter 75 mm to 100 mm, a cap converging to an outlet of diameter 40 mm at a level at least 10 mm above the top of the cylindrical chimney has been found satisfactory. For such tubes also, an electrical-resistance heating element dissipating up to about 1 000 W and helically wound about the outer surface of the tube with a graded distribution of winding pitch (the windings being closer together at the top) has been found suitable in conjunction with a preheater comprising a cylindrical ceramic body with longitudinal holes and containing a heating element dissipating up to about 1 000 W with regulating controls which can be operated separately from those of the heater windings on the chimney tube.

5.3 Test specimen holder, suitable for supporting a specimen vertically in the centre of the chimney, conforming to 5.2 of ISO 4589-2.

The holder may have a complementary tool of any suitable shape (see figure 6) for moving a specimen or loaded specimen holder into or out of the test chimney.

5.4 Gas supplies, conforming to 5.3 of ISO 4589-2.

NOTES

4 Because damage may occur to the chimney heater and preheater if energized while no gas flows through them, it is recommended that a gas-flow or pressure-sensing device

is incorporated in the gas supply lines and is coupled to the heater power-control circuits.

5 To economize purified oxygen and nitrogen, it is recommended that an air pump is provided to supply air instead of oxygen and/or nitrogen, at the appropriate flow rate, during periods when specimens are not being tested.

5.5 Gas measurement and control devices, suitable for measuring the concentration of oxygen in the gas mixture entering the chimney with an accuracy of $\pm 0,5$ % (V/V) of the mixture and for adjusting the concentration with a precision of $\pm 0,1$ % (V/V) of the mixture.

Means shall be provided for checking or ensuring that the temperature of the gas mixture in the chimney is in accordance with 5.2. If this involves an internal probe, its position and profile shall be designed to minimize induction of turbulence within the chimney.

NOTE 6 Systems of measurement and control that have proved satisfactory are listed in 5.4 of ISO 4589-2.

5.6 Flame igniter, conforming to 5.5 of ISO 4589-2.

5.7 Timing device, capable of measuring periods up to 5 min with an accuracy of $\pm 0,5$ s.

5.8 Fume extraction system, conforming to 5.7 of ISO 4589-2.

6 Calibration and maintenance of equipment

Calibrate and maintain the equipment periodically in accordance with the instructions given in annex A of ISO 4589-2 so that the maximum interval between recalibration and use conforms to the periods stated in table 1 of ISO 4589-2.

7 Preparation of test specimens

7.1 Sampling

Sampling shall be in accordance with 7.1 of ISO 4589-2.

For the flammability temperature procedure (see annex A), at least 10 test specimens shall be provided. If a test specimen is not self-supporting at the temperature of the test, it shall be provided with external support by the use of $0,55$ mm \pm $0,05$ mm diameter nickel-chromium alloy wire with a maximum working temperature of $1\ 100$ °C and secured by ties of copper wire of $0,20$ mm \pm $0,02$ mm diameter. These shall

be positioned as shown in figure 7. See annex B for round-robin analysis of test specimen holder.

7.2 Test specimen dimensions and preparation

Test specimen dimensions shall conform to and specimen preparation shall be in accordance with 7.2 of ISO 4589-2.

7.3 Marking of test pieces

Marking of the test specimens shall be in accordance with 7.3 of ISO 4589-2.

7.4 Conditioning

Conditioning shall be in accordance with 7.4 of ISO 4589-2.

8 Procedure

8.1 Setting up the apparatus and test specimen

8.1.1 Position a temperature sensor in the position to be occupied by the top of a test specimen.

Adjust the electrical power to the chimney heater and preheater to give the test temperature, with the gas controls set to give a gas velocity through the chimney of 40 mm/s \pm $0,8$ mm/s at 23 °C.

8.1.2 Select an initial concentration of oxygen to be used. When possible, base this on experience of results for similar materials. Alternatively, try to ignite a test specimen in air at the test temperature, and note the burning behaviour. If the specimen burns rapidly, select an initial concentration of about 18 % (V/V) of oxygen; if the test specimen burns gently or unsteadily, select an initial oxygen concentration of about 21 % (V/V); if the specimen does not continue to burn in air, select an initial concentration of at least 25 % (V/V), depending upon the difficulty of ignition or the period of burning before extinguishing in air.

8.1.3 When the temperature in the test chimney is stable and in accordance with the limits given in 5.2, mount a specimen in the centre of the chimney so that the top of the specimen is at least 100 mm below the open top of the chimney and the lowest exposed part of the specimen is at least 100 mm above the top of the gas distribution device at the base of the chimney.

8.1.4 Preheat the specimen for $240 \text{ s} \pm 10 \text{ s}$ for it to reach a temperature within the applicable test temperature tolerance before ignition.

8.1.5 Set the gas mixing and flow controls so that an oxygen/nitrogen mixture at $23 \text{ }^\circ\text{C}$, containing the desired concentration of oxygen, flows through the chimney at $40 \text{ mm/s} \pm 0,8 \text{ mm/s}$. Let the gas flow purge the chimney for at least 30 s prior to ignition of each specimen, and maintain the flow without change during ignition and combustion of each specimen.

Record the oxygen concentration used as the volume per cent calculated in accordance with the equations given in annex B of ISO 4589-2.

8.2 Igniting the test specimen

Ignite the specimen in accordance with 8.2 of ISO 4589-2, using procedure A or procedure B.

8.3 Assessing burning behaviour

The burning behaviour of individual test specimens shall be assessed in accordance with 8.3 of ISO 4589-2.

8.4 Selecting successive oxygen concentrations

The oxygen concentration required for the purpose of 8.4 to 8.6 shall be calculated in accordance with annex B of ISO 4589-2.

Select successive oxygen concentrations in accordance with 8.4 of ISO 4589-2.

8.5 Determining the preliminary oxygen concentration

Determine the preliminary oxygen concentration in accordance with 8.5 of ISO 4589-2.

8.6 Oxygen concentration changes

Make oxygen concentration changes in accordance with 8.6 of ISO 4589-2.

9 Calculations and expression of results

Calculate the oxygen index in accordance with 9.1 of ISO 4589-2 and determine k in accordance with 9.2 of ISO 4589-2. Determine the standard deviation of

the oxygen concentration measurements in accordance with 9.3 of ISO 4589-2.

10 Procedure C — Comparison with a specified minimum value of the oxygen index at a specified temperature (short procedure)

Carry out the procedure in accordance with clause 10 of ISO 4589-2.

11 Precision

No precision data for these methods of test are currently available. Interlaboratory trials data are being obtained and it is intended that a precision statement be added at the first revision following their collation.

12 Test report

The test report shall include the following information:

- a) a reference to this part of ISO 4589;
- b) a statement that the test results relate only to the behaviour of the test specimens under the conditions of this test and that these results are not to be used to infer the fire hazards of the material in other forms or under other fire conditions;
- c) all details necessary for identification of the material tested, including, where relevant, the type of material, its density, its previous history and the specimen orientation with respect to any anisotropy in the material or sample;
- d) the test specimen form (I to VI) and dimensions;
- e) the method of specimen support, e.g. self-supporting or nickel-chromium alloy wire;
- f) the ignition procedure used (A or B), and the igniter used, if other than the standard propane flame;
- g) the oxygen index;
- h) the test temperature;
- i) the estimated standard deviation and the oxygen concentration increment used, if other than $0,2 \text{ } \%$ (V/V);

- j) a description of any relevant ancillary characteristics or behaviour such as charring, dripping, severe shrinkage, erratic burning or afterglow;
- k) any deviations from the requirements of this part of ISO 4589.

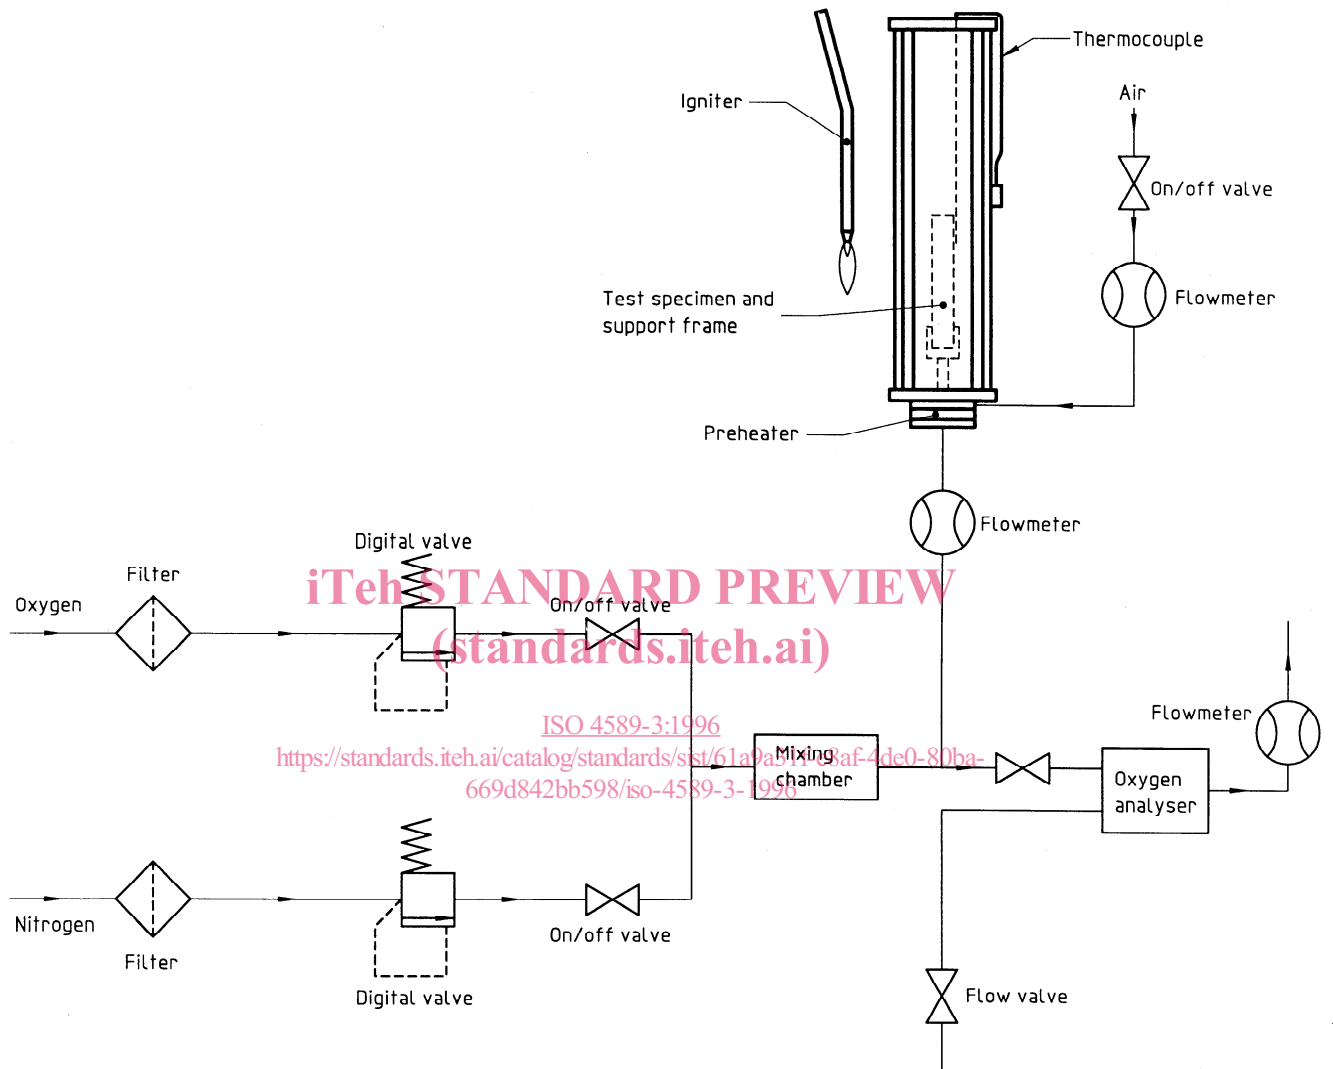


Figure 1 — Diagram of typical apparatus for determination of oxygen index at elevated temperature

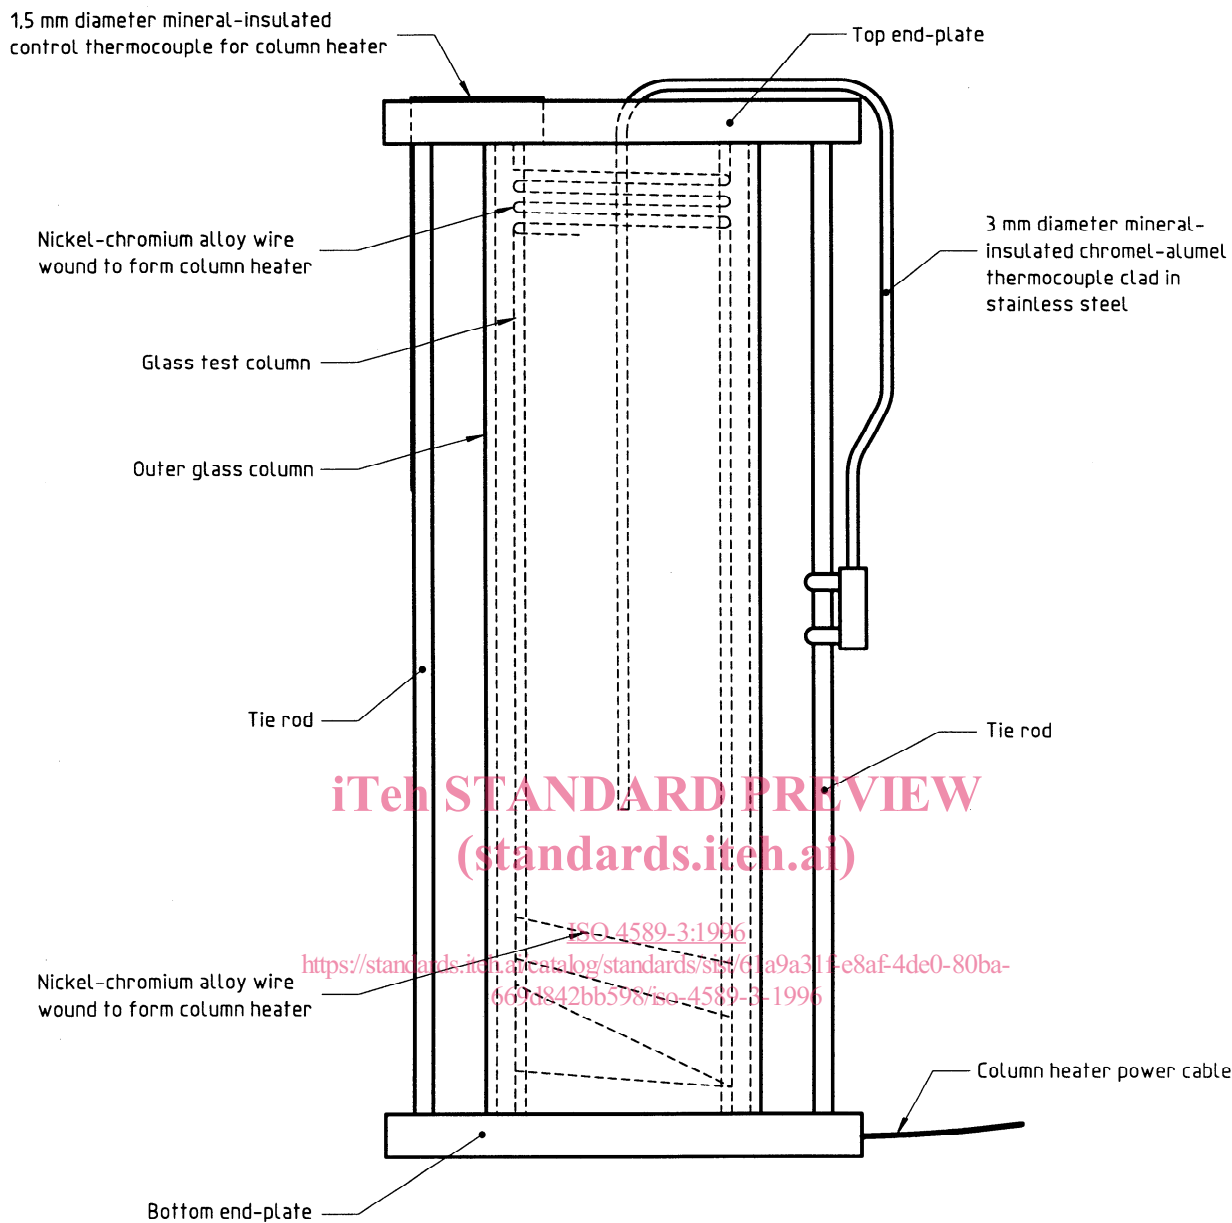


Figure 2 — Diagram of typical heated chimney

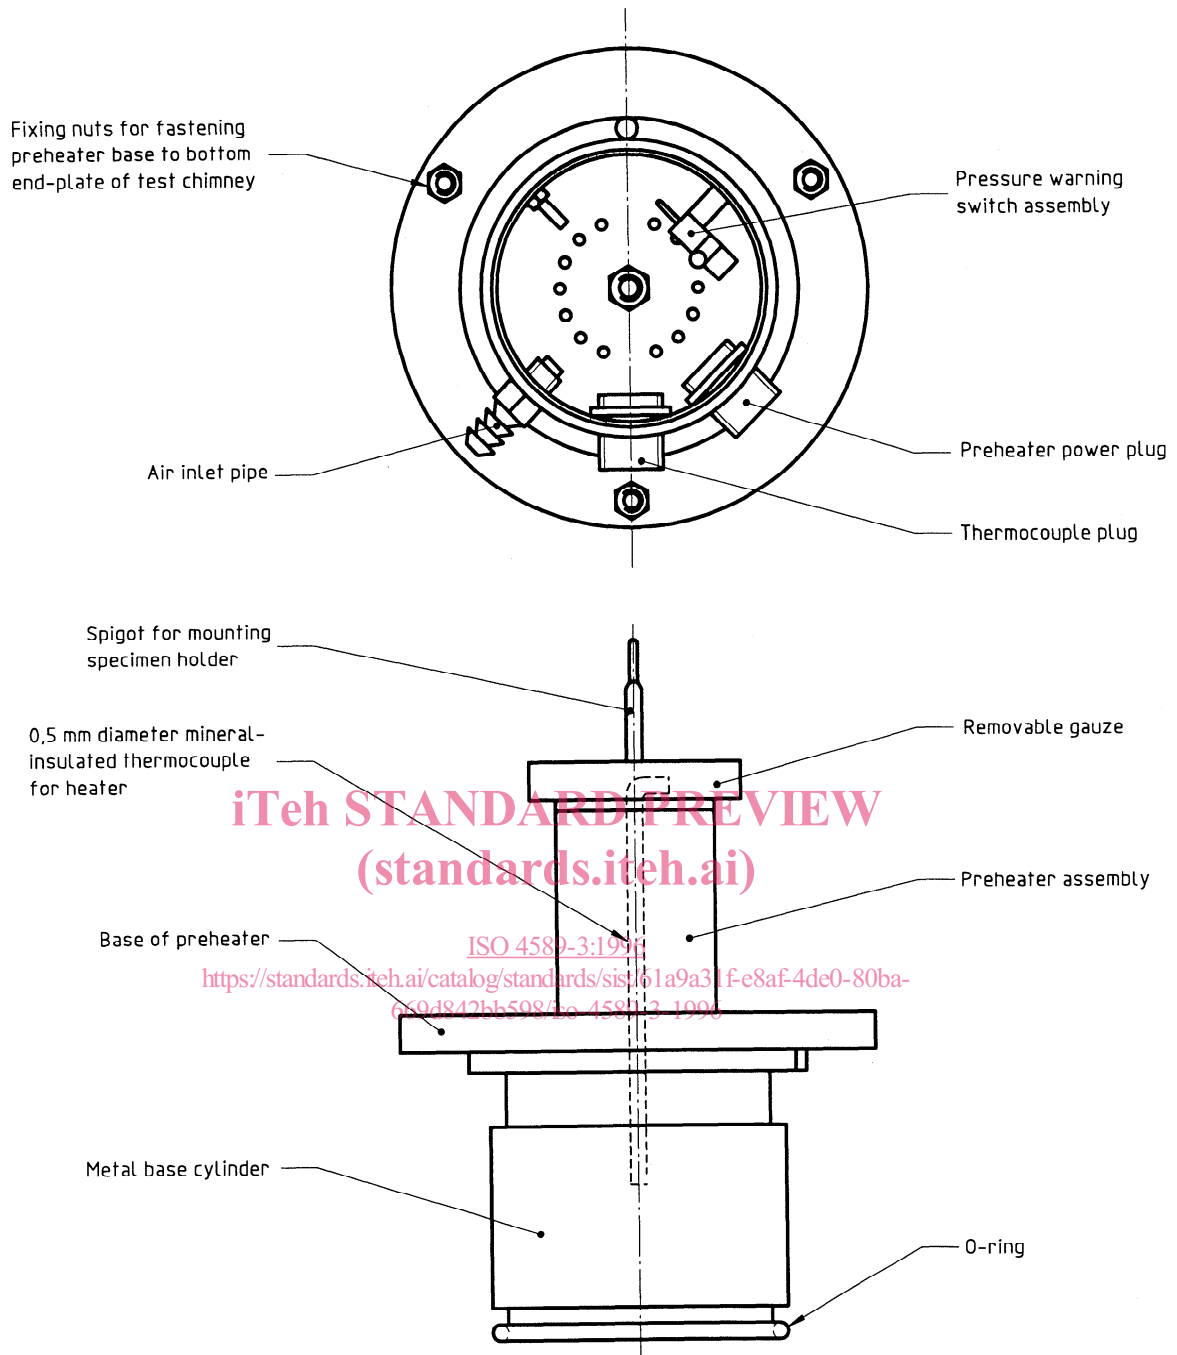


Figure 3 — Diagram of typical form of preheater and base of assembly for test chimney