

INTERNATIONAL STANDARD

**Information technology – UPnP Device Architecture –
Part 4-10: Audio Video Device Control Protocol –
Level 2 – Audio Video Transport Service**

ISO/IEC 29341-4-10:2008

<https://standards.iteh.ai/catalog/standards/iec/6cfd5b9-bbd2-4757-84b7-047a2e457017/iso-iec-29341-4-10-2008>

WITHDRAWN



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2008 ISO/IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.


- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

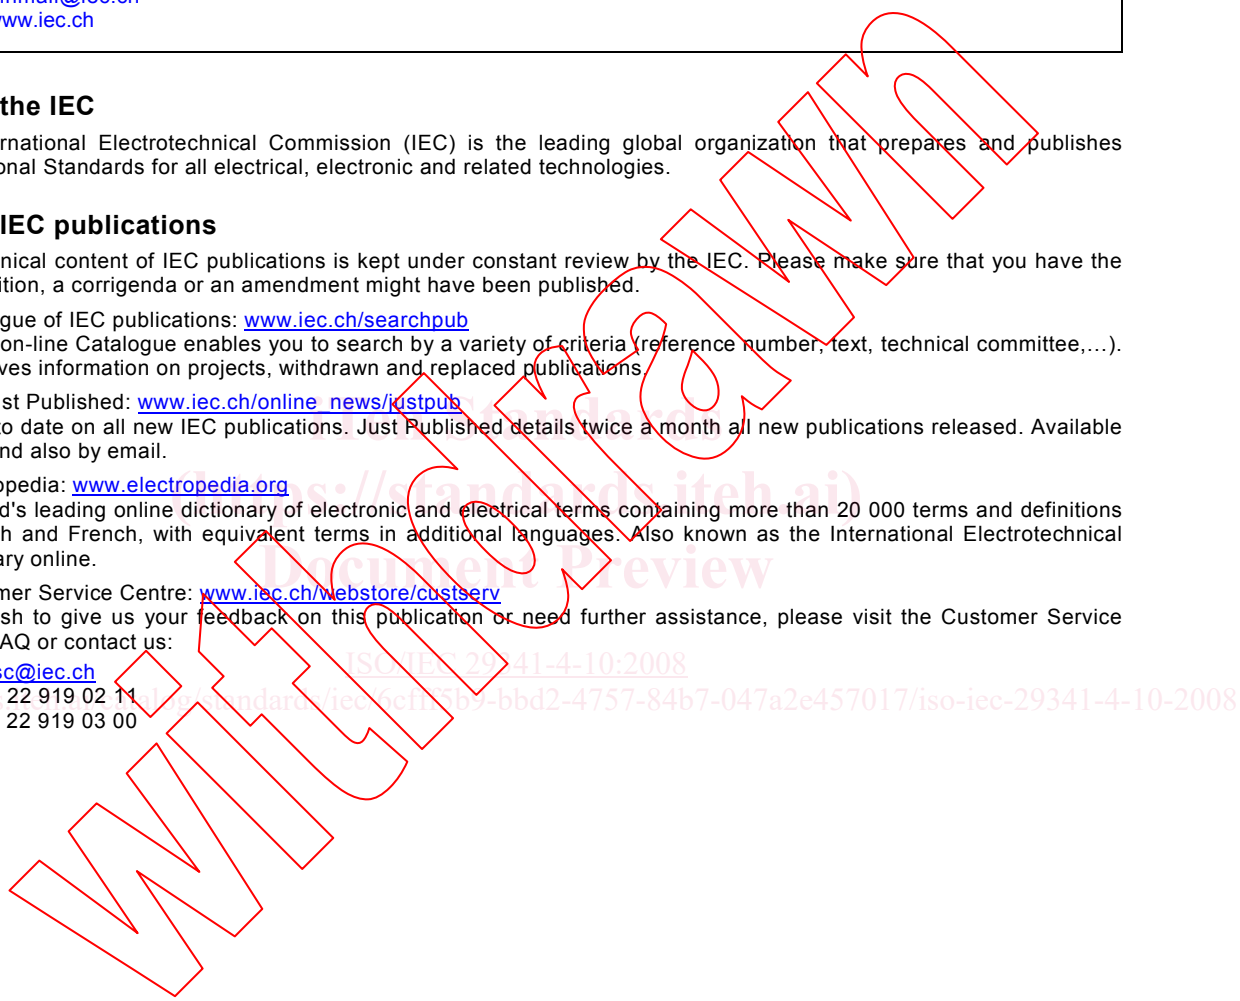

ISO/IEC 29341-4-10:2008

<https://standards.iso.org/standards/iec/6cfa5b9-bbd2-4757-84b7-047a2e457017/iso-iec-29341-4-10-2008>

INTERNATIONAL STANDARD

**Information technology – UPnP Device Architecture –
Part 4-10: Audio Video Device Control Protocol –
Level 2 – Audio Video Transport Service**

Document Preview

ISO/IEC 29341-4-10:2008

<https://standards.iteh.ai/catalog/standards/iec/6cfd5b9-bbd2-4757-84b7-047a2e457017/iso-iec-29341-4-10-2008>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE

X

CONTENTS

FOREWORD	7
ORIGINAL UPNP DOCUMENTS (informative)	9
1 Overview and Scope	11
1.1 Introduction	11
1.2 Notation	11
1.2.1 Data Types	11
1.2.2 Strings Embedded in Other Strings	12
1.2.3 Extended Backus-Naur Form	12
1.3 Derived Data Types	13
1.3.1 Comma Separated Value (CSV) Lists	13
1.4 Management of XML Namespaces in Standardized DCPs	14
1.4.1 Namespace Prefix Requirements	17
1.4.2 Namespace Names, Namespace Versioning and Schema Versioning	18
1.4.3 Namespace Usage Examples	19
1.5 Vendor-defined Extensions	19
1.6 References	20
2 Service Modeling Definitions	23
2.1 ServiceType	23
2.2 State Variables	23
2.2.1 <u>TransportState</u>	28
2.2.2 <u>TransportStatus</u>	28
2.2.3 <u>CurrentMediaCategory</u>	28
2.2.4 <u>PlaybackStorageMedium</u>	29
2.2.5 <u>RecordStorageMedium</u>	29
2.2.6 <u>PossiblePlaybackStorageMedia</u>	29
2.2.7 <u>PossibleRecordStorageMedia</u>	29
2.2.8 <u>CurrentPlayMode</u>	29
2.2.9 <u>TransportPlaySpeed</u>	29
2.2.10 <u>RecordMediumWriteStatus</u>	29
2.2.11 <u>CurrentRecordQualityMode</u>	29
2.2.12 <u>PossibleRecordQualityModes</u>	30
2.2.13 <u>NumberOfTracks</u>	30
2.2.14 <u>CurrentTrack</u>	30
2.2.15 <u>CurrentTrackDuration</u>	30
2.2.16 <u>CurrentMediaDuration</u>	31
2.2.17 <u>CurrentTrackMetaData</u>	31
2.2.18 <u>CurrentTrackURI</u>	31
2.2.19 <u>AVTransportURI</u>	31
2.2.20 <u>AVTransportURIMetaData</u>	31
2.2.21 <u>NextAVTransportURI</u>	31
2.2.22 <u>NextAVTransportURIMetaData</u>	32
2.2.23 <u>RelativeTimePosition</u>	32
2.2.24 <u>AbsoluteTimePosition</u>	32
2.2.25 <u>RelativeCounterPosition</u>	32
2.2.26 <u>AbsoluteCounterPosition</u>	33
2.2.27 <u>CurrentTransportActions</u>	33

2.2.28	<u>LastChange</u>	33
2.2.29	<u>DRMState</u>	33
2.2.30	<u>A ARG TYPE SeekMode</u>	34
2.2.31	<u>A ARG TYPE SeekTarget</u>	34
2.2.32	<u>A ARG TYPE InstanceID</u>	34
2.2.33	<u>A ARG TYPE DeviceUDN</u>	34
2.2.34	<u>A ARG TYPE ServiceType</u>	35
2.2.35	<u>A ARG TYPE ServiceID</u>	35
2.2.36	<u>A ARG TYPE StateVariableValuePairs</u>	35
2.2.37	<u>A ARG TYPE StateVariableList</u>	35
2.3	Eventing and Moderation	36
2.3.1	Event Model	37
2.4	Actions	38
2.4.1	<u>SetAVTransportURI()</u>	39
2.4.2	<u>SetNextAVTransportURI()</u>	41
2.4.3	<u>GetMediaInfo()</u>	43
2.4.4	<u>GetMediaInfo Ext()</u>	44
2.4.5	<u>GetTransportInfo()</u>	45
2.4.6	<u>GetPositionInfo()</u>	46
2.4.7	<u>GetDeviceCapabilities()</u>	47
2.4.8	<u>GetTransportSettings()</u>	48
2.4.9	<u>Stop()</u>	49
2.4.10	<u>Play()</u>	50
2.4.11	<u>Pause()</u>	52
2.4.12	<u>Record()</u>	52
2.4.13	<u>Seek()</u>	54
2.4.14	<u>Next()</u>	56
2.4.15	<u>Previous()</u>	58
2.4.16	<u>SetPlayMode()</u>	60
2.4.17	<u>SetRecordQualityMode()</u>	61
2.4.18	<u>GetCurrentTransportActions()</u>	62
2.4.19	<u>GetDRMState()</u>	63
2.4.20	<u>GetStateVariables()</u>	64
2.4.21	<u>SetStateVariables()</u>	65
2.4.22	Common Error Codes	66
2.5	Theory of Operation	68
2.5.1	TransportState Control	68
2.5.2	Transport Settings	69
2.5.3	Navigation	69
2.5.4	AVTransportURI Concept	69
2.5.5	AVTransport Abstraction	70
2.5.6	Supporting Multiple Virtual Transports	72
2.5.7	Playlist Playback	73
3	XML Service Description	74
4	Test	89
Annex A (normative)	<u>SetAVTransportURI()</u> Protocol Specifics	90
A.1	Application to HTTP Streaming	90
A.1.1	<u>AVTransportURI</u> Definition	90

A.1.2	Control Point Behavior for <u>SetAVTransportURI()</u>	90
A.1.3	Implementation of <u>SetAVTransportURI()</u>	90
A.1.4	Cleanup.....	90
A.2	Application to RTSP/RTP/UDP Streaming.....	90
A.2.1	<u>AVTransportURI</u> Definition.....	90
A.2.2	Control Point behavior for <u>SetAVTransportURI()</u>	91
A.2.3	Implementation of <u>SetAVTransportURI()</u>	91
A.2.4	Cleanup.....	91
A.2.5	Implementation of Transport Controls.....	92
A.3	Application to Internal Streaming.....	92
A.3.1	<u>AVTransportURI</u> Definition.....	92
A.3.2	Implementation of <u>SetAVTransportURI()</u>	92
A.3.3	Cleanup.....	92
A.4	Application to IEC61883 Streaming.....	92
A.4.1	<u>AVTransportURI</u> Definition.....	92
A.4.2	Implementation of <u>SetAVTransportURI()</u>	92
A.4.3	Cleanup.....	93
A.5	Application to Vendor-specific Streaming.....	93
A.5.1	<u>AVTransportURI</u> Definition.....	93
A.5.2	Implementation of <u>SetAVTransportURI()</u>	93
A.5.3	Cleanup.....	93

ITeH Standards
(<https://standards.iteh.ai>)
Document Preview

ISO/IEC 29341-4-10:2008

<https://standards.iteh.ai/catalog/standards/iec/6cfd5b9-bbd2-4757-84b7-047a2e457017/iso-iec-29341-4-10-2008>



LIST OF TABLES

Table 1-1:	EBNF Operators	12
Table 1-2:	CSV Examples	14
Table 1-3:	Namespace Definitions.....	16
Table 1-4:	Schema-related Information	17
Table 1-5:	Default Namespaces for the AV Specifications.....	18
Table 2-6:	State Variables	23
Table 2-7:	allowedValueList for <u>TransportState</u>	24
Table 2-8:	allowedValueList for <u>CurrentMediaCategory</u>	24
Table 2-9:	allowedValueList for <u>PlaybackStorageMedium</u> and <u>RecordStorageMedium</u>	25
Table 2-10:	allowedValueList for <u>CurrentPlayMode</u>	26
Table 2-11:	allowedValueList for <u>RecordMediumWriteStatus</u>	26
Table 2-12:	allowedValueList for <u>CurrentRecordQualityMode</u>	26
Table 2-13:	allowedValueRange for <u>NumberOfTracks</u>	26
Table 2-14:	allowedValueRange for <u>CurrentTrack</u>	27
Table 2-15:	allowedValueList for <u>CurrentTransportActions</u>	27
Table 2-16:	allowedValueList for <u>DRMState</u>	27
Table 2-17:	allowedValueList for <u>A_ARG_TYPE SeekMode</u>	28
Table 2-18:	Format of <u>A_ARG_TYPE SeekTarget</u>	34
Table 2-19:	Event Moderation.....	36
Table 2-20:	Actions.....	38
Table 2-21:	Arguments for <u>SetAVTransportURI()</u>	39
Table 2-22:	Error Codes for <u>SetAVTransportURI()</u>	40
Table 2-23:	Arguments for <u>SetNextAVTransportURI()</u>	41
Table 2-24:	Error Codes for <u>SetNextAVTransportURI()</u>	41
Table 2-25:	Arguments for <u>GetMediaInfo()</u>	43
Table 2-26:	Error Codes for <u>GetMediaInfo()</u>	43
Table 2-27:	Arguments for <u>GetMediaInfo Ext()</u>	44
Table 2-28:	Error Codes for <u>GetMediaInfo Ext()</u>	44
Table 2-29:	Arguments for <u>GetTransportInfo()</u>	45
Table 2-30:	Error Codes for <u>GetTransportInfo()</u>	45
Table 2-31:	Arguments for <u>GetPositionInfo()</u>	46
Table 2-32:	Error Codes for <u>GetPositionInfo()</u>	46
Table 2-33:	Arguments for <u>GetDeviceCapabilities()</u>	47
Table 2-34:	Error Codes for <u>GetDeviceCapabilities()</u>	47
Table 2-35:	Arguments for <u>GetTransportSettings()</u>	48
Table 2-36:	Error Codes for <u>GetTransportSettings()</u>	48
Table 2-37:	Arguments for <u>Stop()</u>	49
Table 2-38:	Error Codes for <u>Stop()</u>	49
Table 2-39:	Arguments for <u>Play()</u>	50

Table 2-40:	Error Codes for <u>Play()</u>	51
Table 2-41:	Arguments for <u>Pause()</u>	52
Table 2-42:	Error Codes for <u>Pause()</u>	52
Table 2-43:	Arguments for <u>Record()</u>	53
Table 2-44:	Error Codes for <u>Record()</u>	53
Table 2-45:	Arguments for <u>Seek()</u>	54
Table 2-46:	Error Codes for <u>Seek()</u>	55
Table 2-47:	Arguments for <u>Next()</u>	56
Table 2-48:	Error Codes for <u>Next()</u>	57
Table 2-49:	Arguments for <u>Previous()</u>	58
Table 2-50:	Error Codes for <u>Previous()</u>	59
Table 2-51:	Arguments for <u>SetPlayMode()</u>	60
Table 2-52:	Error Codes for <u>SetPlayMode()</u>	60
Table 2-53:	Arguments for <u>SetRecordQualityMode()</u>	61
Table 2-54:	Error Codes for <u>SetRecordQualityMode()</u>	61
Table 2-55:	Arguments for <u>GetCurrentTransportActions()</u>	62
Table 2-56:	Error Codes for <u>GetCurrentTransportActions()</u>	62
Table 2-57:	Arguments for <u>GetDRMState()</u>	63
Table 2-58:	Error Codes for <u>GetDRMState()</u>	63
Table 2-59:	Arguments for <u>GetStateVariables()</u>	64
Table 2-60:	Error Codes for <u>GetStateVariables()</u>	64
Table 2-61:	Arguments for <u>SetStateVariables()</u>	65
Table 2-62:	Error Codes for <u>SetStateVariables()</u>	65
Table 2-63:	Common Error Codes.....	66
Table 2-64:	Allowed AVTransportURIs.....	70
Table 2-65:	Example mappings of resources type to track sequences.....	70
Table 2-66:	Example seek modes, play modes and transport actions, per resource type.....	71

LIST OF FIGURES

Figure 1:	<u>TransportState</u> Transitions - INFORMATIVE.....	68
-----------	--	----

INFORMATION TECHNOLOGY – UPNP DEVICE ARCHITECTURE –

Part 3-1: Audio Video Device Control Protocol – Level 2 – Audio Video Transport Service

FOREWORD

- 1) ISO (International Organization for Standardization) and IEC (International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards. Their preparation is entrusted to technical committees; any ISO and IEC member body interested in the subject dealt with may participate in this preparatory work. International governmental and non-governmental organizations liaising with ISO and IEC also participate in this preparation.
- 2) In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.
- 3) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC and ISO member bodies.
- 4) IEC, ISO and ISO/IEC publications have the form of recommendations for international use and are accepted by IEC and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 5) In order to promote international uniformity, IEC and ISO member bodies undertake to apply IEC, ISO and ISO/IEC publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO/IEC publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 6) ISO and IEC provide no marking procedure to indicate their approval and cannot be rendered responsible for any equipment declared to be in conformity with an ISO/IEC publication.
- 7) All users should ensure that they have the latest edition of this publication.
- 8) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon, this ISO/IEC publication or any other IEC, ISO or ISO/IEC publications.
- 9) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.

IEC and ISO draw attention to the fact that it is claimed that compliance with this document may involve the use of patents as indicated below.

ISO and IEC take no position concerning the evidence, validity and scope of the putative patent rights. The holders of the putative patent rights have assured IEC and ISO that they are willing to negotiate free licences or licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statements of the holders of the putative patent rights are registered with IEC and ISO.

Intel Corporation has informed IEC and ISO that it has patent applications or granted patents.

Information may be obtained from:

Intel Corporation
Standards Licensing Department
5200 NE Elam Young Parkway
MS: JFS-98
USA – Hillsboro, Oregon 97124

Microsoft Corporation has informed IEC and ISO that it has patent applications or granted patents as listed below:

6101499 / US; 6687755 / US; 6910068 / US; 7130895 / US; 6725281 / US; 7089307 / US; 7069312 / US; 10/783 524 / US

Information may be obtained from:

Microsoft Corporation
One Microsoft Way
USA – Redmond WA 98052

Philips International B.V. has informed IEC and ISO that it has patent applications or granted patents.

Information may be obtained from:

Philips International B.V. – IP&S
High Tech campus, building 44 3A21
NL – 5656 Eindhoven

NXP B.V. (NL) has informed IEC and ISO that it has patent applications or granted patents.

Information may be obtained from:

NXP B.V. (NL)
High Tech campus 60
NL – 5656 AG Eindhoven

Matsushita Electric Industrial Co. Ltd. has informed IEC and ISO that it has patent applications or granted patents.

Information may be obtained from:

Matsushita Electric Industrial Co. Ltd.
1-3-7 Shiromi, Chuoh-ku
JP – Osaka 540-6139

Hewlett Packard Company has informed IEC and ISO that it has patent applications or granted patents as listed below:

5 956 487 / US; 6 170 007 / US; 6 139 177 / US; 6 529 936 / US; 6 470 339 / US; 6 571 388 / US; 6 205 466 / US

Information may be obtained from:

Hewlett Packard Company
1501 Page Mill Road
USA – Palo Alto, CA 94304

Samsung Electronics Co. Ltd. has informed IEC and ISO that it has patent applications or granted patents.

Information may be obtained from:

Digital Media Business, Samsung Electronics Co. Ltd.
416 Maetan-3 Dong, Yeongtang-Gu,
KR – Suwon City 443-742

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. IEC and ISO shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 29341-4-10 was prepared by UPnP Implementers Corporation and adopted, under the PAS procedure, by joint technical committee ISO/IEC JTC 1, *Information technology*, in parallel with its approval by national bodies of ISO and IEC.

The list of all currently available parts of the ISO/IEC 29341 series, under the general title *Universal plug and play (UPnP) architecture*, can be found on the IEC web site.

This International Standard has been approved by vote of the member bodies, and the voting results may be obtained from the address given on the second title page.

ORIGINAL UPnP DOCUMENTS (informative)

Reference may be made in this document to original UPnP documents. These references are retained in order to maintain consistency between the specifications as published by ISO/IEC and by UPnP Implementers Corporation. The following table indicates the original UPnP document titles and the corresponding part of ISO/IEC 29341:

UPnP Document Title	ISO/IEC 29341 Part
UPnP Device Architecture 1.0	ISO/IEC 29341-1
UPnP Basic:1 Device	ISO/IEC 29341-2
UPnP AV Architecture:1	ISO/IEC 29341-3-1
UPnP MediaRenderer:1 Device	ISO/IEC 29341-3-2
UPnP MediaServer:1 Device	ISO/IEC 29341-3-3
UPnP AVTransport:1 Service	ISO/IEC 29341-3-10
UPnP ConnectionManager:1 Service	ISO/IEC 29341-3-11
UPnP ContentDirectory:1 Service	ISO/IEC 29341-3-12
UPnP RenderingControl:1 Service	ISO/IEC 29341-3-13
UPnP MediaRenderer:2 Device	ISO/IEC 29341-4-2
UPnP MediaServer:2 Device	ISO/IEC 29341-4-3
UPnP AV Datastructure Template:1	ISO/IEC 29341-4-4
UPnP AVTransport:2 Service	ISO/IEC 29341-4-10
UPnP ConnectionManager:2 Service	ISO/IEC 29341-4-11
UPnP ContentDirectory:2 Service	ISO/IEC 29341-4-12
UPnP RenderingControl:2 Service	ISO/IEC 29341-4-13
UPnP ScheduledRecording:1	ISO/IEC 29341-4-14
UPnP DigitalSecurityCamera:1 Device	ISO/IEC 29341-5-1
UPnP DigitalSecurityCameraMotionImage:1 Service	ISO/IEC 29341-5-10
UPnP DigitalSecurityCameraSettings:1 Service	ISO/IEC 29341-5-11
UPnP DigitalSecurityCameraStillImage:1 Service	ISO/IEC 29341-5-12
UPnP HVAC_System:1 Device	ISO/IEC 29341-6-1
UPnP HVAC_ZoneThermostat:1 Device	ISO/IEC 29341-6-2
UPnP ControlValve:1 Service	ISO/IEC 29341-6-10
UPnP HVAC_FanOperatingMode:1 Service	ISO/IEC 29341-6-11
UPnP FanSpeed:1 Service	ISO/IEC 29341-6-12
UPnP HouseStatus:1 Service	ISO/IEC 29341-6-13
UPnP HVAC_SetpointSchedule:1 Service	ISO/IEC 29341-6-14
UPnP TemperatureSensor:1 Service	ISO/IEC 29341-6-15
UPnP TemperatureSetpoint:1 Service	ISO/IEC 29341-6-16
UPnP HVAC_UserOperatingMode:1 Service	ISO/IEC 29341-6-17
UPnP BinaryLight:1 Device	ISO/IEC 29341-7-1
UPnP DimmableLight:1 Device	ISO/IEC 29341-7-2
UPnP Dimming:1 Service	ISO/IEC 29341-7-10
UPnP SwitchPower:1 Service	ISO/IEC 29341-7-11
UPnP InternetGatewayDevice:1 Device	ISO/IEC 29341-8-1
UPnP LANDevice:1 Device	ISO/IEC 29341-8-2
UPnP WANDevice:1 Device	ISO/IEC 29341-8-3
UPnP WANCConnectionDevice:1 Device	ISO/IEC 29341-8-4
UPnP WLANAccessPointDevice:1 Device	ISO/IEC 29341-8-5
UPnP LANHostConfigManagement:1 Service	ISO/IEC 29341-8-10
UPnP Layer3Forwarding:1 Service	ISO/IEC 29341-8-11
UPnP LinkAuthentication:1 Service	ISO/IEC 29341-8-12
UPnP RadiusClient:1 Service	ISO/IEC 29341-8-13
UPnP WANCableLinkConfig:1 Service	ISO/IEC 29341-8-14
UPnP WANCommonInterfaceConfig:1 Service	ISO/IEC 29341-8-15
UPnP WANDSLLinkConfig:1 Service	ISO/IEC 29341-8-16
UPnP WANEthernetLinkConfig:1 Service	ISO/IEC 29341-8-17
UPnP WANIPConnection:1 Service	ISO/IEC 29341-8-18
UPnP WANPOTSLinkConfig:1 Service	ISO/IEC 29341-8-19
UPnP WANPPPConnection:1 Service	ISO/IEC 29341-8-20
UPnP WLANConfiguration:1 Service	ISO/IEC 29341-8-21
UPnP Printer:1 Device	ISO/IEC 29341-9-1
UPnP Scanner:1.0 Device	ISO/IEC 29341-9-2
UPnP ExternalActivity:1 Service	ISO/IEC 29341-9-10
UPnP Feeder:1.0 Service	ISO/IEC 29341-9-11
UPnP PrintBasic:1 Service	ISO/IEC 29341-9-12
UPnP Scan:1 Service	ISO/IEC 29341-9-13
UPnP QoS Architecture:1.0	ISO/IEC 29341-10-1
UPnP QoSDevice:1 Service	ISO/IEC 29341-10-10
UPnP QoSManager:1 Service	ISO/IEC 29341-10-11
UPnP QoSPolicyHolder:1 Service	ISO/IEC 29341-10-12
UPnP QoS Architecture:2	ISO/IEC 29341-11-1
UPnP QOS v2 Schema Files	ISO/IEC 29341-11-2

UPnP Document Title	ISO/IEC 29341 Part
UPnP QosDevice:2 Service	ISO/IEC 29341-11-10
UPnP QosManager:2 Service	ISO/IEC 29341-11-11
UPnP QosPolicyHolder:2 Service	ISO/IEC 29341-11-12
UPnP RemoteUIClientDevice:1 Device	ISO/IEC 29341-12-1
UPnP RemoteUIServerDevice:1 Device	ISO/IEC 29341-12-2
UPnP RemoteUIClient:1 Service	ISO/IEC 29341-12-10
UPnP RemoteUIServer:1 Service	ISO/IEC 29341-12-11
UPnP DeviceSecurity:1 Service	ISO/IEC 29341-13-10
UPnP SecurityConsole:1 Service	ISO/IEC 29341-13-11

Withdrawing

iTech Standards
(<https://standards.itih.ai>)
Document Preview

ISO/IEC 29341-4-10:2008

<https://standards.itih.ai/catalog/standards/iec/6c1f75b9-bbd2-4757-84b7-047a2e457017/iso-iec-29341-4-10-2008>

1 Overview and Scope

1.1 Introduction

This service definition is compliant with the UPnP Device Architecture version 1.0.

This service type enables control over the transport of audio and video streams. The service type defines a common model for A/V transport control suitable for a generic user interface. It can be used to control a wide variety of disc, tape and solid-state based media devices such as CD players, VCRs and MP3 players. A minimal implementation of this service can be used to control tuners.

The service type is related to the ConnectionManager service type, which describes A/V connection setup procedures, and the ContentDirectory service, which offers meta-information about the resource stored on the media. AVTransport also offers an action to retrieve any meta-data embedded in the resource itself.

This service type does not offer *scheduled* recording.

1.2 Notation

- In this document, features are described as Required, Recommended, or Optional as follows:

The key words “MUST,” “MUST NOT,” “REQUIRED,” “SHALL,” “SHALL NOT,” “SHOULD,” “SHOULD NOT,” “RECOMMENDED,” “MAY,” and “OPTIONAL” in this specification are to be interpreted as described in [RFC 2119].

In addition, the following keywords are used in this specification:

PROHIBITED – The definition or behavior is an absolute prohibition of this specification. Opposite of **REQUIRED**.

CONDITIONALLY REQUIRED – The definition or behavior depends on a condition. If the specified condition is met, then the definition or behavior is **REQUIRED**, otherwise it is **PROHIBITED**.

CONDITIONALLY OPTIONAL – The definition or behavior depends on a condition. If the specified condition is met, then the definition or behavior is **OPTIONAL**, otherwise it is **PROHIBITED**.

These keywords are thus capitalized when used to unambiguously specify requirements over protocol and application features and behavior that affect the interoperability and security of implementations. When these words are not capitalized, they are meant in their natural-language sense.

- Strings that are to be taken literally are enclosed in “double quotes”.
- Words that are emphasized are printed in *italic*.
- Keywords that are defined by the UPnP AV Working Committee are printed using the *forum* character style.
- Keywords that are defined by the UPnP Device Architecture are printed using the *arch* character style.
- A double colon delimiter, “::”, signifies a hierarchical parent-child (parent::child) relationship between the two objects separated by the double colon. This delimiter is used in multiple contexts, for example: Service::Action(), Action()::Argument, parentProperty::childProperty.

1.2.1 Data Types

This specification uses data type definitions from two different sources. The UPnP Device Architecture defined data types are used to define state variable and action argument data types [DEVICE]. The XML Schema namespace is used to define property data types [XML SCHEMA-2].

For UPnP Device Architecture defined Boolean data types, it is strongly **RECOMMENDED** to use the value “**0**” for false, and the value “**1**” for true. However, when used as input arguments, the values “**false**”, “**no**”, “**true**”, “**yes**” may also be encountered and **MUST** be accepted. Nevertheless, it is strongly **RECOMMENDED** that all state variables and output arguments be represented as “**0**” and “**1**”.

For XML Schema defined Boolean data types, it is strongly **RECOMMENDED** to use the value “**0**” for false, and the value “**1**” for true. However, when used as input properties, the values “**false**”, “**true**” may also be

encountered and MUST be accepted. Nevertheless, it is strongly RECOMMENDED that all properties be represented as “Q” and “I”.

1.2.2 Strings Embedded in Other Strings

Some string variables and arguments described in this document contain substrings that MUST be independently identifiable and extractable for other processing. This requires the definition of appropriate substring delimiters and an escaping mechanism so that these delimiters can also appear as ordinary characters in the string and/or its independent substrings. This document uses embedded strings in two contexts – Comma Separated Value (CSV) lists (see Section 1.3.1, “Comma Separated Value (CSV) Lists”) and property values in search criteria strings. Escaping conventions use the backslash character, “\” (character code U+005C), as follows:

- a. Backslash (“\”) is represented as “\\” in both contexts.
- b. Comma (“,”) is
 - 1. represented as “\,” in individual substring entries in CSV lists
 - 2. not escaped in search strings
- c. Double quote (“””) is
 - 1. not escaped in CSV lists
 - 2. not escaped in search strings when it appears as the start or end delimiter of a property value
 - 3. represented as “\”” in search strings when it appears as a character that is part of the property value

1.2.3 Extended Backus-Naur Form

Extended Backus-Naur Form is used in this document for a formal syntax description of certain constructs. The usage here is according to the reference [EBNF].

1.2.3.1 Typographic conventions for EBNF

Non-terminal symbols are unquoted sequences of characters from the set of English upper and lower case letters, the digits “0” through “9”, and the hyphen (“-”). Character sequences between 'single quotes' are terminal strings and MUST appear literally in valid strings. Character sequences between (*comment delimiters*) are English language definitions or supplementary explanations of their associated symbols. White space in the EBNF is used to separate elements of the EBNF, not to represent white space in valid strings. White space usage in valid strings is described explicitly in the EBNF. Finally, the EBNF uses the following operators:

Table 1-1: EBNF Operators

Operator	Semantics
: :=	definition – the non-terminal symbol on the left is defined by one or more alternative sequences of terminals and/or non-terminals to its right.
	alternative separator – separates sequences on the right that are independently allowed definitions for the non-terminal on the left.
*	null repetition – means the expression to its left MAY occur zero or more times.
+	non-null repetition – means the expression to its left MUST occur at least once and MAY occur more times.
[]	optional – the expression between the brackets is optional.
()	grouping – groups the expressions between the parentheses.
-	character range – represents all characters between the left and right character operands inclusively.