



SLOVENSKI STANDARD
SIST EN ISO 2739:2000

01-december-2000

Sintered metal bushes - Determination of radial crushing strength (ISO 2739:1973)

Sintered metal bushes - Determination of radial crushing strength (ISO 2739:1973)

Buchsen aus Sintermetall - Bestimmung der radialen Bruchfestigkeit (ISO 2739:1973)

Bagues en métal fritté - Détermination de la résistance à l'écrasement radial (ISO 2739:1973)

(standards.iteh.ai)

Ta slovenski standard je istoveten z: EN ISO 2739:1998

<https://standards.iteh.ai/catalog/standards/sist/6e9c9b28-b8b9-4b0c-a1a5-b8e0a121afb8/sist-en-iso-2739-2000>

ICS:

77.040.10 Mehansko preskušanje kovin Mechanical testing of metals

SIST EN ISO 2739:2000

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN ISO 2739:2000

<https://standards.iteh.ai/catalog/standards/sist/6e9c9b28-b8b9-4b0c-a1a5-b8e0a121afb8/sist-en-iso-2739-2000>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN ISO 2739

April 1998

ICS 77.040.10

Descriptors: see ISO document

English version

Sintered metal bushes - Determination of radial crushing
strength (ISO 2739:1973)

Bagues en métal fritté - Détermination de la résistance à
l'écrasement radial (ISO 2739:1973)

Buchsen aus Sintermetall - Bestimmung der radialen
Bruchfestigkeit (ISO 2739:1973)

This European Standard was approved by CEN on 27 March 1998.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

[SIST EN ISO 2739:2000](https://standards.iteh.ai/catalog/standards/sist/6e9c9b28-b8b9-4b0c-a1a5-b8e0a121afb8/sist-en-iso-2739-2000)

<https://standards.iteh.ai/catalog/standards/sist/6e9c9b28-b8b9-4b0c-a1a5-b8e0a121afb8/sist-en-iso-2739-2000>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Central Secretariat: rue de Stassart, 36 B-1050 Brussels

Page 2
EN ISO 2739:1998

Foreword

The text of the International Standard from Technical Committee ISO/TC 119 "Powder metallurgy" of the International Organization for Standardization (ISO) has been taken over as an European Standard by CEN/CS.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by October 1998, and conflicting national standards shall be withdrawn at the latest by October 1998.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and the United Kingdom.

Endorsement notice

The text of the International Standard ISO 2739:1973 has been approved by CEN as a European Standard without any modification.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN ISO 2739:2000

<https://standards.iteh.ai/catalog/standards/sist/6e9c9b28-b8b9-4b0c-a1a5-b8e0a121afb8/sist-en-iso-2739-2000>



INTERNATIONAL STANDARD



2739

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION • МЕЖДУНАРОДНАЯ ОРГАНИЗАЦИЯ ПО СТАНДАРТИЗАЦИИ • ORGANISATION INTERNATIONALE DE NORMALISATION

Sintered metal bushes – Determination of radial crushing strength

First edition – 1973-12-01

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN ISO 2739:2000](https://standards.iteh.ai/catalog/standards/sist/6e9c9b28-b8b9-4b0c-a1a5-b8e0a121afb8/sist-en-iso-2739-2000)

<https://standards.iteh.ai/catalog/standards/sist/6e9c9b28-b8b9-4b0c-a1a5-b8e0a121afb8/sist-en-iso-2739-2000>

UDC 669.492.8 : 620.173

Ref. No. ISO 2739-1973 (E)

Descriptors : sintered products, bushings, rings, tests, mechanical tests, compression tests.

Price based on 2 pages

FOREWORD

ISO (the International Organization for Standardization) is a worldwide federation of national standards institutes (ISO Member Bodies). The work of developing International Standards is carried out through ISO Technical Committees. Every Member Body interested in a subject for which a Technical Committee has been set up has the right to be represented on that Committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work.

Draft International Standards adopted by the Technical Committees are circulated to the Member Bodies for approval before their acceptance as International Standards by the ISO Council.

International Standard ISO 2739 was drawn up by Technical Committee ISO/TC 119, *Powder metallurgical materials and products*, and circulated to the Member Bodies in July 1972.

(standards.iteh.ai)

It has been approved by the Member Bodies of the following countries :

Australia	Germany	South Africa, Rep. of
Austria	Italy	Spain
Canada	Japan	Sweden
Czechoslovakia	Mexico	Thailand
Egypt, Arab Rep. of	Portugal	United Kingdom
France	Romania	U.S.A.

No Member Body expressed disapproval of the document.

Sintered metal bushes – Determination of radial crushing strength

1 SCOPE

This International Standard specifies a method of measuring the radial crushing strength of sintered metal parts in the form of hollow cylinders commonly known as bushes.

2 FIELD OF APPLICATION

This method is applicable to sintered bushes composed of pure or alloyed metal powders.

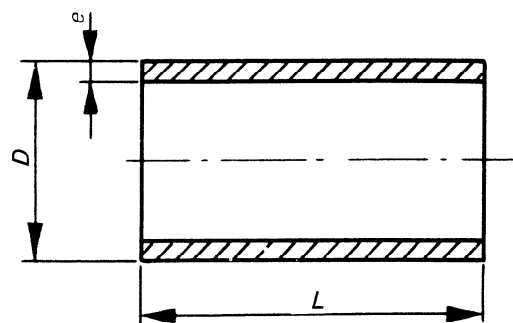


FIGURE 1 – Test piece

3 PRINCIPLE

A hollow cylinder is submitted to a continuously increasing radial load until breakage occurs, provided that the deformation does not exceed 10 % of the diameter. The maximum load observed is used to calculate a value in relation to the dimensions of the hollow cylinder known as "radial crushing strength".

4 APPARATUS

4.1 Pressing apparatus which enables a radial load to be applied to a hollow cylinder.

4.2 Load-measuring device capable of giving the reading of the maximum value attained.

5 TEST PIECE

The test piece (see figure 1) is to be in the form of a sintered hollow cylinder (which may or may not be oil-impregnated), without flanges, notches, grooves, pronounced chamfers, drilled holes, oilways or keyways. If necessary, the cylinder may be machined but, in this case, results obtained may differ from those obtained with a cylinder which has not been machined.

6 PROCEDURE

Place the test piece between the plates of the pressing apparatus, the axis of the test piece being parallel to the planes of the plates (see figure 2).

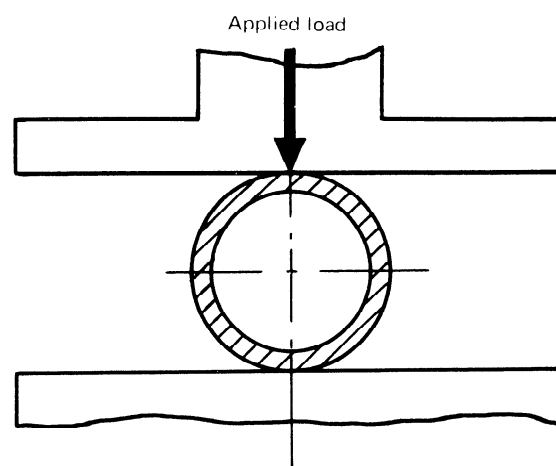


FIGURE 2 – Test arrangement

Apply the load progressively, without shock, so that coefficient K (see clause 7) increases at a rate between 2 and 20 N/mm² per second and that the test time is greater than 10 s.

ISO 2739-1973 (E)

7 EXPRESSION OF RESULTS

The radial crushing strength of the bush, K , in newtons per square millimetre, is given by the following formula :

$$K = \frac{F (D - e)}{L e^2}$$

where

F is the maximum load, in newtons, incurring fracture;

L is the length, in millimetres, of the hollow cylinder;

D is the external diameter, in millimetres, of the hollow cylinder;

e is the thickness, in millimetres, of the cylinder wall.

This formula is valid only if the ratio e/D is less than $1/3^*$.

8 TEST REPORT

The test report shall include the following information :

- a) reference to this International Standard;
- b) all details necessary for identification of the specimen;

- c) whether the specimen is as sintered or sized;
- d) whether the specimen has been machined or not, and if so a drawing showing how the specimen has been taken from the part;
- e) whether the specimen has been oil impregnated or not;
- f) the result obtained;
- g) all operations not specified in this International Standard, or regarded as optional;
- h) details of any occurrence which may have affected the result.

If necessary, the data required for the identification of the test piece shall be agreed between manufacturer and user.

iteh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN ISO 2739:2000

<https://standards.iteh.ai/catalog/standards/sist/6e9c9b28-b8b9-4b0c-a1a5-b8e0a121afb8/sist-en-iso-2739-2000>

* In this case, the tensile strength is approximately equal to $0,5 K$.