

ETSI EN 302 217-3 V1.2.1 (2008-02)

Harmonized European Standard (Telecommunications series)

**Fixed Radio Systems;
Characteristics and requirements for
point-to-point equipment and antennas;
Part 3: Harmonized EN covering essential requirements
of article 3.2 of R&TTE Directive for equipment operating in
frequency bands where simplified or no frequency
co-ordination procedures are applied**

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/5045540b-c21f-411b-88de-a9235e1bddd/etsi-en-302-217-3-v1.2.1-2008-02>



Reference

REN/ATTM-04001

Keywords

DFRS, digital, DRRS, FWA, point-to-point, radio, regulation, transmission, antenna

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2008.
All rights reserved.

DECT™, PLUGTESTS™, UMTS™, TIPHON™, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intellectual Property Rights	6
Foreword.....	6
Introduction	7
1 Scope	8
2 References	9
2.1 Normative references	9
2.2 Informative references	10
3 Definitions, symbols and abbreviations	11
3.1 Definitions	11
3.2 Symbols	11
3.3 Abbreviations	11
4 Technical requirements specifications	11
4.1 Environmental profile.....	11
4.2 RF-channel selection	11
4.2.1 RF-channel selection procedure.....	12
4.2.2 Interference avoidance requirements	12
4.2.2.1 Interference avoidance limit.....	12
4.2.3 Frequency agile automatic channel selection	12
4.3 Transmitter requirements	13
4.3.1 Transmitter power.....	13
4.3.1.1 Transmitter power	13
4.3.1.2 Equivalent Isotropically Radiated Power (EIRP).....	13
4.3.1.3 Output Power Tolerance	13
4.3.2 Radio Frequency (RF) spectrum mask.....	13
4.3.3 Spurious emissions	13
4.3.4 Radio frequency tolerance	14
4.3.5 Antenna directional requirements	14
4.3.5.1 Radiation Pattern Envelope (Off-axis EIRP density).....	14
4.3.5.2 Antenna gain	14
4.3.5.3 Antenna Cross-Polar Discrimination (XPD).....	14
4.4 Receiver requirements	15
4.4.1 Spurious emissions	15
5 Testing for compliance with technical requirements.....	15
5.1 Environmental conditions for testing	15
5.2 RF-channel selection	16
5.3 Essential radio test suites for the transmitter	16
5.3.1 Transmitter power.....	17
5.3.1.1 Transmitter power	17
5.3.1.2 Equivalent Isotropically Radiated Power (EIRP) and EIRP density mask.....	17
5.3.1.3 Output power tolerance	17
5.3.2 RF spectrum mask	17
5.3.3 Spurious emissions - external	17
5.3.4 Radio frequency tolerance	17
5.3.5 Antenna and system directional requirements	18
5.3.5.1 Radiation pattern envelope (Off-axis EIRP density).....	18
5.3.5.2 Antenna gain	18
5.3.5.3 Antenna Cross-Polar Discrimination (XPD).....	18
5.4 Essential radio test suites for the receiver	18
5.4.1 Spurious emissions	19
Annex A (normative): HS Requirements and conformance Test specifications Table (HS-RTT).....	20

Annex B (normative):	Wide radio-frequency band covering units and multirate equipment specification and tests	22
B.1	Wide radio-frequency band covering units	22
B.2	Multirate/multiformat equipment	24
Annex UA (normative):	Frequency bands around 58 GHz.....	25
UA.0	Introduction	25
UA.1	Digital systems	25
UA.1.1	Frequency bands and channel arrangements	25
UA.1.1.1	Frequency band.....	25
UA.1.1.2	Radio channel arrangements	25
UA.1.1.3	Transmission capacity.....	25
UA.1.2	Transmitter	25
UA.1.2.1	Transmitter power.....	25
UA.1.2.2	Equivalent Isotropically Radiated Power (EIRP)	26
UA.1.2.3	Output power tolerance.....	26
UA.1.2.4	RF spectrum masks	26
UA.1.2.4.1	Limits	26
UA.1.2.4.2	Spectrum analyser settings	27
UA.1.2.5	Spurious emissions-external	27
UA.1.2.6	Radio frequency tolerance	27
UA.1.2.7	RF-channel selection parameters	27
UA.1.3	Receiver.....	27
UA.2	Analogue systems.....	28
UA.2.1	Frequency bands and channel arrangements	28
UA.2.1.1	Frequency band.....	28
UA.2.1.2	Radio channel arrangements	28
UA.2.1.3	Transmission capacity.....	28
UA.2.2	Transmitter	28
UA.2.2.1	Transmitter power.....	28
UA.2.2.2	Equivalent Isotropically Radiated Power (EIRP)	28
UA.2.2.3	Output power tolerance.....	28
UA.2.2.4	RF spectrum masks	28
UA.2.2.5	Spurious emissions - external	28
UA.2.2.6	RF frequency tolerance	28
UA.2.3	Receiver requirements	29
UA.2.3.1	Spurious emissions	29
Annex UB (normative):	Frequency band 64 GHz to 66 GHz	30
UB.0	Introduction	30
UB.1	Frequency bands and channel arrangements	30
UB.1.1	Frequency band	30
UB.1.2	Radio channel arrangements.....	30
UB.1.3	Spectral efficiency	31
UB.2	Transmitter	31
UB.2.1	Transmitter power and Equivalent Isotropically Radiated Power (EIRP).....	31
UB.2.2	Output power tolerance	33
UB.2.3	EIRP density masks	33
UB.2.3.1	Limits.....	33
UB.2.3.2	Spectrum analyser settings.....	34
UB.2.4	Spurious emissions	34
UB.2.5	Radio frequency tolerance.....	35
UB.2.6	RF-channel selection parameters.....	35
UB.2.7	Antenna gain	35
UB.3	Receiver.....	35

Annex UC (normative):	Void	36
Annex UD (informative):	Rationale for the interference limit formula	37
UD.1	Analysis of the quality value for the channel selection procedure	37
UD.1.1	Error-performance and availability requirements for Class A equipment	37
UD.1.1.1	Example in the 58 GHz band	37
UD.1.2	Theoretical background	37
UD.1.3	Typical co-channel interference situation when channel rejection threshold is used	38
UD.2	Protection capability of the RF-channel selection procedure	39
UD.3	Frequency agility criteria	40
Annex UE (informative):	Capacity and Receiver characteristics in the band 64 GHz to 65 GHz.....	41
UE.1	Band 64 GHz to 65 GHz	41
UE.1.1	BER as a function of receiver input signal level (RSL)	41
UE.1.2	Co-channel and adjacent channel interference sensitivity	42
UE.1.3	CW spurious interference	42
Annex UF (informative):	Bibliography	43
Annex UG (informative):	The EN title in the official languages	44
History		46

iTeh STANDARD PREVIEW
 (standards.iteh.ai)
 Full standard:
<https://standards.iteh.ai/catalog/standards/sist/5045540b-c24f-411b-88de-a923e1bddd/etsi-en-302-217-3-v1.2.1-2008-02>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Access, Terminals, Transmission and Multiplexing (ATTM).

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC (as amended) laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC [1] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("R&TTE Directive").

Technical specifications relevant to Directive 1999/5/EC [1] are given in annex A.

The present document is part 3 of a multi-part deliverable covering Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas, as identified below:

- Part 1: "Overview and system-independent common characteristics";
- Part 2-1: "System-dependent requirements for digital systems operating in frequency bands where frequency co-ordination is applied";
- Part 2-2: "Harmonized EN covering essential requirements of Article 3.2 of R&TTE Directive for digital systems operating in frequency bands where frequency co-ordination is applied";
- Part 3: "Harmonized EN covering essential requirements of Article 3.2 of R&TTE Directive for equipment operating in frequency bands where simplified or no frequency co-ordination procedures are applied";**
- Part 4-1: "System-dependent requirements for antennas";
- Part 4-2: "Harmonized EN covering essential requirements of Article 3.2 of R&TTE Directive for antennas".

National transposition dates

Date of adoption of this EN:	8 February 2008
Date of latest announcement of this EN (doa):	31 May 2008
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	30 November 2008
Date of withdrawal of any conflicting National Standard (dow):	30 November 2009

Introduction

The EN 302 217 series has been produced in order to rationalize a large number of previous ETSI ENs dealing with equipment and antennas for Point-to-Point (P-P) Fixed Service applications. For more details, see foreword in the EN 302 217-1 [7].

The present document is part of a set of standards developed by ETSI and is designed to fit in a modular structure to cover all radio and telecommunications terminal equipment within the scope of the R&TTE Directive [1]. The modular structure is described in EG 201 399 and shown in figure 1.

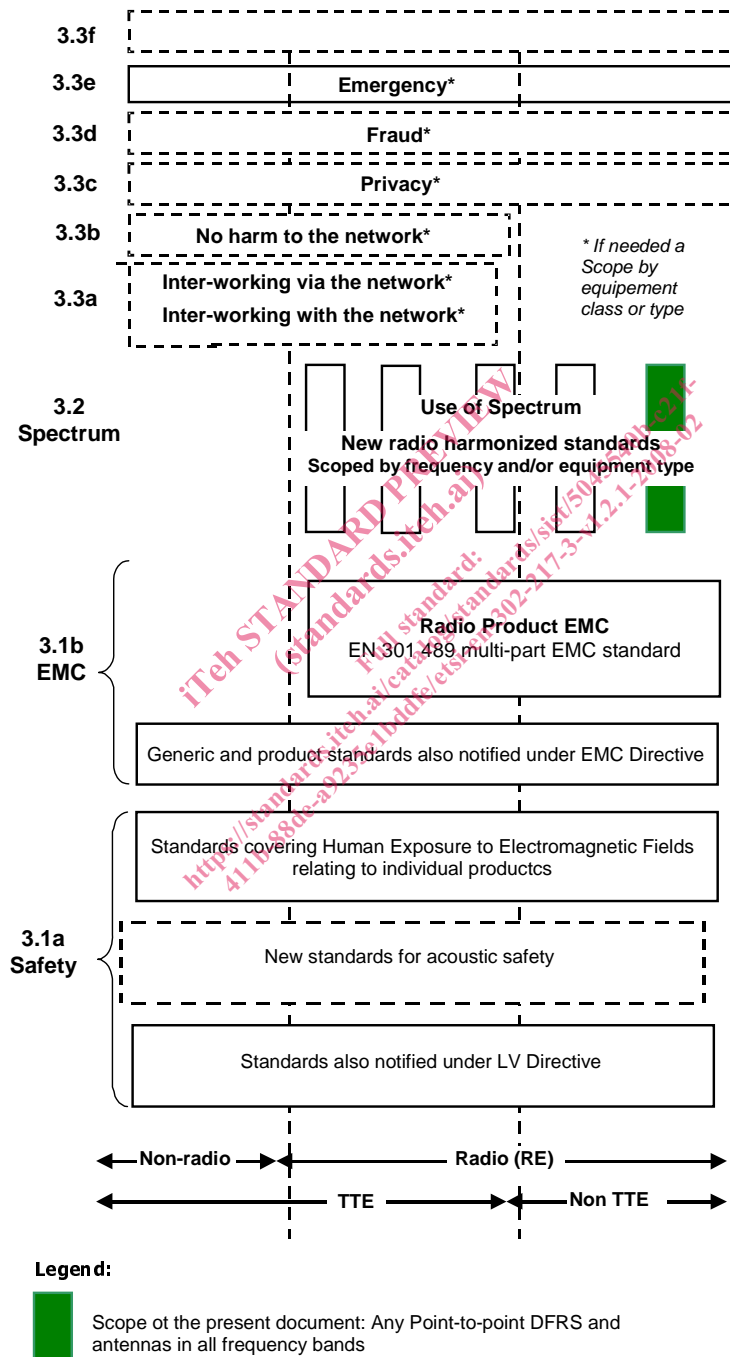


Figure 1: Modular structure for the various standards used under the R&TTE Directive

NOTE: For article 3.1b the diagram shows EN 301 489 [16], the multi-part product EMC standard for radio used under the EMC Directive 89/336/EEC [17]. For Fixed Radio Systems EN, EN 301 489-1 [18] and EN 301 489-4 [19] are relevant.

1 Scope

The present document specifies the essential requirements for point-to-point Digital Fixed Radio Systems (DFRS) operating in higher frequency bands, which might not require detailed link-by-link co-ordinated frequency planning; this imply either no co-ordination at all (i.e. the band usage is free and the user is responsible for detecting a suitable interference-free operating frequency) or simplified co-ordination procedures implying the knowledge of existing links (e.g. through a public national database) so that the impact of a possible new link could be evaluated on the basis of budgetary considerations of typical equipment receiver parameters (which will not be considered related to essential requirements of art 3.2 R&TTE Directive [1]). It is intended to cover the provisions of Directive 1999/5/EC [1] (R&TTE Directive) regarding article 3.2, which states that "... radio equipment shall be so constructed that it effectively uses the spectrum allocated to terrestrial/space radio communications and orbital resources so as to avoid harmful interference".

The EN 302 217 series introduces requirements for systems (equipment and antennas) that were formerly covered by EN 301 751 [20] and that are technically equivalent or less stringent requirements. Therefore, from a strictly technical point of view, it is expected that equipment already conforming to the previous EN 301 751 [20] or previous versions of the present harmonized standard, would not need a new test report for re-assessment of essential requirements according this new multi-part deliverable; however, legal implications with respect to the declaration of conformity and equipment labelling are not in the scope of the present document.

In addition to the present document, other ENs that specify technical requirements in respect of essential requirements under other parts of article 3 of the R&TTE Directive [1] will apply to equipment within the scope of the present document.

NOTE: A list of such ENs is included on the web site <http://www.newapproach.org/>.

In order to technically cover different market and network requirements, with an appropriate balance of performance to cost and effective and appropriate use of the radio spectrum, the present document, together with EN 302 217-4-2 [8], offers system types and antennas alternatives, for selection by administrations, operators and manufacturers dependent on the desired use of the radio spectrum and network/market requirements, those options include:

- channel separation alternatives (as provided by the relevant CEPT Recommendation);
- implemented procedure for free radio channel selection;
- antenna directivity class alternatives (for different network density requirement).

The present document is mainly intended to cover fixed radio equipment without integral antennas. However, it also applies to fixed radio systems products with integral antennas, for which all the technical requirements included in the present document and in EN 302 217-4-2 [8] apply. For more background information on the equipment and antenna parameters here identified as relevant to article 3.2 of R&TTE Directive see EG 201 399 [15] and TR 101 506 [21].

For example, the frequency band 58 GHz is proposed to be used by various technologies for uncoordinated use of the band. Besides the RF-channel selection procedure, specified in clause 4.2 to avoid unacceptable interference situations, this band also benefits from the high and stable atmospheric attenuation which suppresses efficiently distant interferers (about 10 dB/km to 15 dB/km at sea level, refer to ITU-R Recommendation P.676 [22]).

For the purposes of the present document two equipment Classes are specified depending on the network requirements:

- Class A: Digital equipment which apply the automatic RF-channel selection procedure (see clause 4.2) for interference avoidance and error performance enhancement.
- Class B: Equipment without automatic RF-channel selection procedure.

Typical applications for Class A equipment are interconnection between cellular networks where, in some cases, there is a need for short length connections (up to about 500 m). The RF channel selection procedure shall be used to protect existing systems from a new system being commissioned. However, the channel selection procedure may not guarantee interference free installation or operation in all cases, due to limitations in the procedure with respect to the variety of systems.

Typical applications for Class B equipment are:

- private connections, such as video surveillance systems in 58 GHz band;

- very high capacity (of Gigabit/s order or more) over relatively short links (up to around 2 km) in 65 GHz band (e.g. for connecting large data servers).

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
 - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
 - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

For online referenced documents, information sufficient to identify and locate the source shall be provided. Preferably, the primary source of the referenced document should be cited, in order to ensure traceability. Furthermore, the reference should, as far as possible, remain valid for the expected life of the document. The reference shall include the method of access to the referenced document and the full network address, with the same punctuation and use of upper case and lower case letters.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are indispensable for the application of the present document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

- [1] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).
- [2] CEPT/ERC/REC 74-01 (2005): "Unwanted emissions in the spurious domain".
- [3] CEPT/ERC/REC 12-09 (2004): "Radio frequency channel arrangement for Fixed Service systems operating in the band 57,0 - 59,0 GHz which do not require frequency planning".
- [4] CEPT/ECC/REC/(05)02 (2005): "Use of the 64,0 - 66,0 GHz frequency band for Fixed Service".
- [5] ETSI EN 301 126-1 (V1.1.2): "Fixed Radio Systems; Conformance testing; Part 1: Point-to-Point equipment - Definitions, general requirements and test procedures".
- [6] ETSI EN 301 126-3-1 (V1.1.1): "Fixed Radio Systems; Conformance testing; Part 3-1: Point-to-Point antennas; Definitions, general requirements and test procedures".
- [7] ETSI EN 302 217-1 (V1.2.1): "Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas; Part 1: Overview and system-independent common characteristics".
- [8] ETSI EN 302 217-4-2 (V1.3.1): "Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas; Part 4-2: Harmonized EN covering essential requirements of Article 3.2 of R&TTE Directive for antennas".

- [9] IEEE 1802.3 (2001): "IEEE Conformance Test Methodology for IEEE Standards for Local and Metropolitan Area Networks-Specific Requirements-Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications".
- [10] IEEE 802.3 (2002): "Information technology - Telecommunications and information exchange between systems - Local and metropolitan area networks - Specific requirements - Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) access method and physical layer specifications".
- [11] ITU-R Recommendation SM.1539 (2002): "Variation of the boundary between the out-of-band and spurious domains required for the application of Recommendations ITU-R SM.1541 and ITU-R SM.329".
- [12] ITU-T Recommendation O.151 and Corrigendum 1 (2002): "Error performance measuring equipment operating at the primary rate and above".
- [13] ITU-T Recommendation O.181 (2002): "Equipment to assess error performance on STM-N interfaces".
- [14] ITU-T Recommendation O.191 (2000): "Equipment to measure the cell transfer performance of ATM connections".

2.2 Informative references

- [15] ETSI EG 201 399: "Electromagnetic compatibility and Radio spectrum Matters (ERM); A guide to the production of candidate Harmonized Standards for application under the R&TTE Directive".
- [16] ETSI EN 301 489 (All parts): "Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services".
- [17] EMC Directive 89/336/EEC: "Council Directive of 3 May 1989 on the approximation of the laws of the Member States relating to electromagnetic compatibility".
- [18] ETSI EN 301 489-1: "Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements".
- [19] ETSI EN 301 489-4: "Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 4: Specific conditions for fixed radio links and ancillary equipment and services".
- [20] ETSI EN 301 751 (V1.2.1): "Fixed Radio Systems; Point-to-Point equipments and antennas; Generic harmonized standard for Point-to-Point digital fixed radio systems and antennas covering the essential requirements under article 3.2 of the 1999/5/EC Directive".
- [21] ETSI TR 101 506: "Fixed Radio Systems; Generic definitions, terminology and applicability of essential requirements under the article 3.2 of 99/05/EC Directive to Fixed Radio Systems".
- [22] ITU-R Recommendation P.676: "Attenuation by atmospheric gases".
- [23] ITU-R Recommendation F.1191: "Bandwidths and unwanted emissions of digital radio-relay systems".
- [24] ETSI EN 302 217-2-1: "Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas; Part 2-1: System-dependent requirements for digital systems operating in frequency bands where frequency co-ordination is applied".
- [25] ETSI EN 302 217-2-2: "Fixed Radio Systems; Characteristics and requirements for point-to-point equipment and antennas; Part 2-2: Harmonized EN covering essential requirements of Article 3.2 of R&TTE Directive for digital systems operating in frequency bands where frequency co-ordination is applied".
- [26] ITU-R Recommendation F.1497: "Radio-frequency channel arrangements for fixed wireless systems operating in the band 55.78-59 GHz".

- [27] ITU-R Recommendation F.1101: "Characteristics of digital fixed wireless systems below about 17 GHz".
- [28] ETSI EN 301 390 (V1.2.1): "Fixed Radio Systems; Point-to-point and Multipoint Systems; Spurious emissions and receiver immunity limits at equipment/antenna port of Digital Fixed Radio Systems".
- [29] ITU Radio Regulations (2004).

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in EN 302 217-1 [7] apply.

3.2 Symbols

For the purposes of the present document, the symbols given in EN 302 217-1 [7] apply.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in EN 302 217-1 [7] apply.

4 Technical requirements specifications

Guidance and description of the phenomena relevant to "essential requirements" under article 3.2 is given in EG 201 399 [15]; specific applications and descriptions for DFRS is given in TR 101 506 [21].

In the following clauses, limits are required to be met at specific reference points of the system block diagram. Reference points and the system block diagram are those set out in figure 1 of EN 302 217-1 [7].

In the case of wide radio-frequency bands covering units and multirate/multiformat equipment, these specifications shall be met at any frequency and at any rate/format. However the tests, required for generating a test report and/or declaration of conformity, in order to fulfil any conformity assessment procedure with respect to the R&TTE Directive [1], shall be carried-out in accordance with the principles set out in annex B.

Testing methods and conditions for assessing all requirements are specified in clause 5, where each clause directly refers to corresponding clause in this clause.

4.1 Environmental profile

The required environmental profile for operation of the equipment shall be declared by the supplier. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the required operational environmental profile.

For testing the compliance with technical requirements see also EN 301 126-1 [5] and clause 5 of the present document.

NOTE: With the generic term of environmental profile, it is here intended any variation of the "external" conditions (e.g. climatic and external primary/secondary power supply sources feeding the equipment to be assessed) that might affect the system parameter relevant to the "essential requirements" of article 3.2 of the R&TTE Directive [1].

4.2 RF-channel selection

RF-channel selection procedure is mandatory for Class A equipment only.

4.2.1 RF-channel selection procedure

The purpose of the RF-channel selection procedure is to detect and protect existing transmissions in order to avoid unacceptable interference situations.

At both transmission sites, radio-relay terminals shall measure during installation, the interference levels of both receive and transmit channels (see note). Only in the instance when an unoccupied channel is identified and selected as the transmission channel shall the transmit power be switched on. The interference avoidance requirements for the receiver to detect occupied channels are specified in clause 4.2.2.

The principle of protecting existing transmission shall be respected also during the antenna alignment procedure.

NOTE: If the national regulatory rules allow to change the frequency of the link during its operation, it may be considered, in order to decrease the possibility of undetected interference, to apply the RF channel selection procedure whenever appropriate (e.g. when restoring a link after a failure or by suitable automatic timed routine in conjunction with frequency agility as in clause 4.2.3).

4.2.2 Interference avoidance requirements

4.2.2.1 Interference avoidance limit

The radio relay terminal shall consider the radio channel occupied when the level of the interference is above the following limit:

- $P_i > C \text{ dBm} + 10 \log (BW/10 \text{ MHz})$.

Where:

- BW is the noise bandwidth of the receiver expressed in MHz.
- P_i is the interference power expressed in dBm measured within the receiver noise bandwidth (BW).

The value C is dependent on frequency band and is given in the relevant annexes UA to UC.

For the rationale of the interference limit formula see annex UD.

For test purpose this requirement shall be fulfilled at reference point C within the intended band of transmission:

- with a signal similar to the transmitted one;
- with a CW signal at any frequency within this band.

The value of the intended band of transmission shall be declared by the supplier.

4.2.3 Frequency agile automatic channel selection

Frequency agility is an optional feature.

If unacceptable interference which exceeds a predetermined duration is observed, an automatic change of RF-channel can be initiated using the RF-channel selection procedure described above. If an automatic RF-channel change facility is implemented a means shall be provided to disable it. Unacceptable interference criteria shall be declared by the supplier (see clause UD.3).