

---

---

**Test conditions for milling machines with  
table of variable height — Testing of  
accuracy —**

**Part 3:  
Machines with vertical spindle**

iTeh STANDARD PREVIEW

*Conditions d'essai des machines à fraiser à table de hauteur variable —  
Contrôle de la précision*

*Partie 3: Machines à broche verticale*

ISO 1701-3:1997

<https://standards.iteh.ai/catalog/standards/sist/bf8a417d-f53a-4807-abd3-315e1226bdd4/iso-1701-3-1997>



## Contents

	Page
1 Scope .....	1
2 Normative references .....	1
3 Terminology and designation of axes .....	1
4 Preliminary remarks .....	1
4.1 Measuring units .....	1
4.2 Reference to ISO 230-1 .....	2
4.3 Testing sequence .....	2
4.4 Tests to be performed .....	2
4.5 Measuring instruments .....	2
4.6 Machining tests .....	2
4.7 Minimum tolerance .....	2
5 Geometric tests .....	3
5.1 Axes of motion .....	3
5.2 Table .....	6
5.3 Spindle .....	12
6 Machining tests .....	15
<b>Annex</b>	
A Bibliography .....	16

© ISO 1997

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization  
 Case postale 56 • CH-1211 Genève 20 • Switzerland  
 Internet central@iso.ch  
 X.400 c=ch; a=400net; p=iso; o=isocs; s=central

Printed in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75% of the member bodies casting a vote.

iTeh STANDARD PREVIEW

International Standard ISO 1701-3 was prepared by Technical Committee ISO/TC 39, *Machine tools*, Subcommittee SC 2, *Test conditions for metal cutting machine tools*.

<https://standards.iteh.ai/catalog/standards/sist/1701-3-1997/iso-1701-3-1997>

This first edition of ISO 1701-3 as well as ISO 1701-2 cancels and replaces ISO 1701:1974, which has been technically revised.

ISO 1701 consists of the following parts, under the general title *Test conditions for milling machines with table of variable height — Testing of accuracy*.

- *Part 0: General introduction (to become part 1 on its next revision)*
- *Part 2: Machines with horizontal spindle*
- *Part 3: Machines with vertical spindle*

Annex A of this part of ISO 1701 is for information only.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 1701-3:1997

<https://standards.iteh.ai/catalog/standards/sist/bf8a417d-f53a-4807-abd3-315e1226bdd4/iso-1701-3-1997>

# Test conditions for milling machines with table of variable height — Testing of accuracy

## Part 3: Machines with vertical spindle

### 1 Scope

This part of ISO 1701 specifies, with reference to ISO 230-1, both geometric and machining tests on general purpose, normal accuracy, vertical spindle milling machines with table of variable height. It also specifies the applicable tolerances corresponding to the above-mentioned tests.

This part of ISO 1701 deals only with the verification of accuracy of the machine. It does not apply to the testing of the running of the machine (vibration, abnormal noise, stick-slip motion of components, etc.), nor to machine characteristics (such as speeds, feeds, etc.), which should generally be carried out before testing the accuracy.

### 2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 1701. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 1701 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 230-1:1996, *Test code for machine tools — Part 1: Geometric accuracy of machines operating under no-load or finishing conditions.*

ISO 1701-0:1984<sup>1)</sup>, *Test conditions for milling machines with table of variable height with horizontal or vertical spindle — Part 0: General introduction.*

### 3 Terminology and designation of axes

For axes of machines with vertical spindle, reference should be made to 4.2 and figure 5 of ISO 1701-0:1984

### 4 Preliminary remarks

#### 4.1 Measuring units

In this part of ISO 1701, all linear dimensions, deviations and corresponding tolerances are expressed in millimetres; angular dimensions are expressed in degrees, and angular deviations and the corresponding tolerances are expressed in ratios but in some cases microradians or arcseconds may be used for clarification purposes. The equivalence of the following expressions should always be kept in mind:

$$0,010/1\,000 = 10 \times 10^{-6} = 10 \mu\text{rad} \approx 2''$$

<sup>1)</sup> See "Foreword"

#### 4.2 Reference to ISO 230-1

To apply this part of ISO 1701, reference shall be made to ISO 230-1, especially for the installation of the machine before testing, warming up of the spindle and other moving components, description of measuring methods and recommended accuracy of testing equipment.

In the "Observations" block of the tests described in the following sections, the instructions are followed by a reference to the corresponding clause in ISO 230-1 in cases where the test concerned is in compliance with the specifications of that part of ISO 230.

#### 4.3 Testing sequence

The sequence in which the tests are presented in this part of ISO 1701 in no way defines the practical order of testing. In order to make the mounting of instruments or gauging easier, tests may be performed in any order.

#### 4.4 Tests to be performed

When testing a machine, it is not always necessary or possible to carry out all the tests described in this part of ISO 1701. When the tests are required for acceptance purposes, it is up to the user to choose, in agreement with the supplier/manufacturer, those tests relating to the components and/or the properties of the machine which are of interest. These tests are to be clearly stated when ordering a machine. Mere reference to this part of ISO 1701 for the acceptance tests, without specifying the tests to be carried out, and without agreement on the relevant expenses, cannot be considered as binding for any contracting party.

iTeh STANDARD PREVIEW

#### 4.5 Measuring instruments

(standards.iteh.ai)

The measuring instruments indicated in the tests described in the following sections are examples only. Other instruments measuring the same quantities and having at least the same accuracy may be used. Dial gauges shall have a resolution of 0,001 millimetres or better.

#### 4.6 Machining tests

Machining tests shall be made with finishing cuts only, not with roughing cuts which are liable to generate appreciable cutting forces.

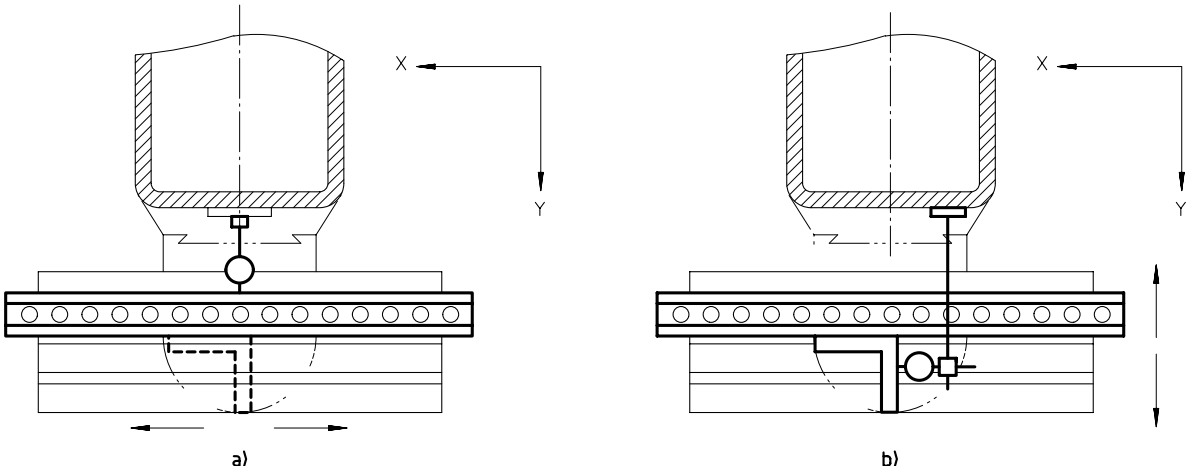
#### 4.7 Minimum tolerance

When the tolerance for a geometric test is established for a measuring length different from that given in this part of ISO 1701 (see 2.311 of ISO 230-1:1996), it shall be taken into consideration that the minimum value of tolerance is 0,005 mm.

**5 Geometric tests**

**5.1 Axes of motion**

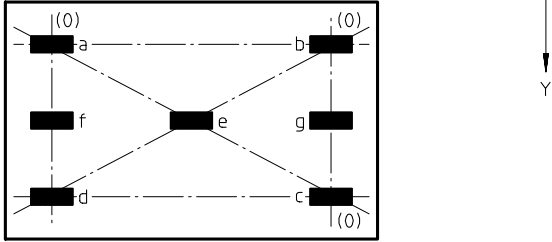
<p><b>Object</b></p>	<p><b>G1</b></p>
<p>Checking of straightness of the vertical movement of the knee (W-axis):</p> <p>a) in the vertical plane of symmetry of the machine (YZ plane);</p> <p>b) in the plane perpendicular to the vertical plane of symmetry of the machine (ZX plane).</p>	
<p><b>Diagram</b></p>	
<p><b>Tolerance</b></p> <p style="text-align: center;">a and b)</p> <p style="text-align: center;">0,020 for any measuring length of 300</p>	<p><b>(Measured deviation)</b></p> <p>a)</p> <p>b)</p>
<p><b>Measuring instruments</b></p> <p>Dial gauge and square.</p>	
<p><b>Observations and references to ISO 230-1</b> <span style="float: right;">5.232.11</span></p> <p>Instead of a straightedge, use the vertical arm of the square.</p> <p>Adjust the square to obtain similar readings at both ends of its measuring length, then the maximum difference of dial gauge readings gives straightness deviation.</p> <p>Table in central position:</p> <p>a) cross slide (Y-axis) locked;</p> <p>b) table (X-axis) locked.</p> <p>If the spindle can be locked, the dial gauge may be mounted on it. If the spindle cannot be locked, the dial gauge shall be placed on a fixed part of the machine.</p>	

<p><b>Object</b></p>	<p><b>G2</b></p>
<p>Checking of squareness between the transverse cross slide movement (Y-axis) and the longitudinal table movement (X-axis).</p>	
<p><b>Diagram</b></p> 	
<p><b>Tolerance</b></p> <p>0,02 for a measuring length of 300</p>	<p style="text-align: center;"><b>(Measured deviation)</b></p>
<p><b>Measuring instruments</b></p> <p>Straightedge, dial gauge and square.</p>	
<p><b>Observations and references to ISO 230-1</b></p> <p>5.522.4</p> <p>Knee (W-axis) locked.</p> <p>a) The straightedge shall be set parallel to the longitudinal table movement (X-axis); then the square shall be placed against the straightedge. The table shall then be locked in the central position. This test can also be performed without the straightedge, aligning the long arm of the square parallel to the X-axis.</p> <p>b) The transverse cross slide movement (Y-axis) shall then be checked.</p> <p>If the spindle can be locked, then the dial gauge may be mounted on it. If the spindle cannot be locked, the dial gauge shall be placed on a fixed part of the machine.</p>	



<p><b>Object</b></p>	<p><b>G3</b></p>									
<p>Checking of angular deviation of the table in its longitudinal movement (X-axis):</p> <p>a) in the vertical YZ plane perpendicular to the table movement (roll EAX);</p> <p>b) in the vertical ZX plane parallel to the table movement (pitch EBX).</p>										
<p><b>Diagram</b></p>										
<p style="text-align: center;">ISO 1701-3:1997</p> <p style="text-align: center;"><a href="https://standards.iteh.ai/catalog/standards/sist/b18a417d-b53a-4807-abd3-315e1226bdd4/iso-1701-3-1997">https://standards.iteh.ai/catalog/standards/sist/b18a417d-b53a-4807-abd3-315e1226bdd4/iso-1701-3-1997</a></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2" style="width: 60%;"></th> <th style="width: 40%; text-align: center;">(Measured deviation)</th> </tr> </thead> <tbody> <tr> <td style="width: 30%;">a) 0,04/1 000 (or 40 microrad or 8")</td> <td style="width: 30%;">b) <math>X \leq 1\ 000</math> 0,08/1 000 (or 80 microrad or 16")</td> <td style="width: 40%; text-align: center;">a)</td> </tr> <tr> <td></td> <td style="text-align: center;"><math>X \leq 1\ 000</math> 0,12/1 000 (or 120 microrad or 24")</td> <td style="text-align: center;">b)</td> </tr> </tbody> </table>				(Measured deviation)	a) 0,04/1 000 (or 40 microrad or 8")	b) $X \leq 1\ 000$ 0,08/1 000 (or 80 microrad or 16")	a)		$X \leq 1\ 000$ 0,12/1 000 (or 120 microrad or 24")	b)
		(Measured deviation)								
a) 0,04/1 000 (or 40 microrad or 8")	b) $X \leq 1\ 000$ 0,08/1 000 (or 80 microrad or 16")	a)								
	$X \leq 1\ 000$ 0,12/1 000 (or 120 microrad or 24")	b)								
<p><b>Measuring instruments</b></p> <p>Precision level</p>										
<p><b>Observations and references to ISO 230-1</b> <span style="float: right;">5.232.2</span></p> <p>These tests should only be performed when the knee (W-axis) is clamped on the column.</p> <p>The level shall be placed in centre of the table</p> <p>a) transversely;</p> <p>b) longitudinally.</p> <p>The reference level shall be located on the spindle head, and the spindle head shall be in the middle of the travel range.</p> <p>When X-axis motion causes an angular deviation of the table, differential measurements of the two angular movements shall be made and this shall be stated.</p> <p>Measurements shall be taken at several positions moving the table by 200 or 250 mm steps.</p> <p>The difference between the maximum and the minimum readings (excluding the above angular contribution) of both directions of movement shall not exceed the tolerance.</p>										

5.2 Table

<p><b>Object</b></p> <p>Checking of flatness of the table surface.</p>	<p><b>G4</b></p>
<p><b>Diagram</b></p> 	
<p><b>Tolerance</b></p> <p>0,04 for a measuring length up to 1 000 (concave only)</p> <p>For each 1 000 mm increase in table length, add 0,005</p> <p>Maximum tolerance: 0,05</p> <p>Local tolerance: 0,02 for any measuring length of 300</p>	<p><b>(Measured deviation)</b></p>
<p><b>Measuring instruments</b></p> <p>Precision level or straightedge and slip gauges.</p>	
<p><b>Observations and references to ISO 230-1</b> 5.322 and 5.323</p> <p>Table (X-axis) and cross slide (Y-axis) in the central position, table not locked, knee and cross slide locked.</p> <p>NOTE — The alphabetical references on the diagram correspond to those used in figure 41 of ISO 230-1:1996.</p>	

<p><b>Object</b></p>	<p><b>G5</b></p>
<p>Checking of parallelism between the table surface and:</p> <ul style="list-style-type: none"> <li>a) the transverse cross slide movement (Y-axis), in the vertical YZ plane;</li> <li>b) its longitudinal movement (X-axis), in the vertical ZX plane.</li> </ul>	
<p><b>Diagram</b></p> <p style="text-align: center;"> <a href="https://standards.iteh.ai/catalog/standards/sist/bf8a417d-f53a-4807-abd3-315e1226bdd4/iso-1701-3-1997">https://standards.iteh.ai/catalog/standards/sist/bf8a417d-f53a-4807-abd3-315e1226bdd4/iso-1701-3-1997</a> </p>	
<p><b>Tolerance</b></p> <p style="text-align: center;">a) and b)</p> <p style="text-align: center;">0,025 for any measuring length of 300</p> <p style="text-align: center;">Maximum tolerance: 0,05</p>	<p><b>(Measured deviation)</b></p> <p>a)</p> <p>b)</p>
<p><b>Measuring instruments</b></p> <p>Straightedge and dial gauge.</p>	
<p><b>Observations and references to ISO 230-1</b> <span style="float: right;">5.422.21</span></p> <p>The stylus of the dial gauge shall be placed approximately at the working</p> <p style="text-align: center;">y be made on a straightedge laid parallel to the table surface.</p> <p>If the table length is greater than 1600 mm, carry out the inspection by successive movements of the straightedge.</p> <p>Knee (W-axis) locked:</p> <ul style="list-style-type: none"> <li>a) table (X-axis) locked;</li> <li>b) cross slide (Y-axis) locked.</li> </ul> <p>If the spindle can be locked, the dial gauge may be mounted on it. If the spindle cannot be locked, the dial gauge shall be placed on a fixed part of the machine.</p>	