
Plovila za celinske vode - Električne povezave s kopnim, trifazni tok 400 V, do 63 A, 50 Hz - 3. del: Enota na krovu, varnostne zahteve

Inland navigation vessels - Electrical shore connection, three phase current 400 V, up to 63 A, 50 Hz - Part 3: On-board unit, safety requirements

Fahrzeuge der Binnenschifffahrt - Elektrischer Landanschluss, Drehstrom 400 V, bis 63 A, 50 Hz - Teil 3: Bordseitiger Teil, sicherheitstechnische Anforderungen

Bateaux de navigation intérieure - Connexion au réseau électrique terrestre, courant triphasé de 400 V, 63 A maximum, 50 Hz - Partie 3: Unité à bord, exigences de sécurité

<https://standards.iteh.ai/catalog/standards/sist/15a146e9-f537-4970-875e-3736bcef7999/sist-en-15869-3-2010>

Ta slovenski standard je istoveten z: EN 15869-3:2010

ICS:

47.020.60	Električna oprema ladij in konstrukcij na morju	Electrical equipment of ships and of marine structures
47.060	Jezerska in rečna plovila	Inland navigation vessels

SIST EN 15869-3:2010

en,fr,de

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 15869-3:2010

<https://standards.iteh.ai/catalog/standards/sist/15a146e9-f537-4970-875e-3736bcef7999/sist-en-15869-3-2010>

EUROPEAN STANDARD

EN 15869-3

NORME EUROPÉENNE

EUROPÄISCHE NORM

February 2010

ICS 47.020.60; 47.060

English Version

Inland navigation vessels - Electrical shore connection, three phase current 400 V, up to 63 A, 50 Hz - Part 3: On-board unit, safety requirements

Bateaux de navigation intérieure - Connexion au réseau électrique terrestre, courant triphasé 400 V, à 63 A, 50 Hz - Partie 3: Unité à bord, exigences de sécurité

Fahrzeuge der Binnenschifffahrt - Elektrischer Landanschluss, Drehstrom 400 V, bis 63 A, 50 Hz - Teil 3: Bordseitiger Teil, sicherheitstechnische Anforderungen

This European Standard was approved by CEN on 25 December 2009.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

<https://standards.iteh.ai/catalog/standards/sist/158140c9-9571-4970-875e-3736bcef7999/sist-en-15869-3-2010>



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	3
Introduction	4
1 Scope	5
2 Normative references	5
3 Terms and definitions	5
4 Safety requirements	7
4.1 Cable set	7
4.2 Feed unit	9
4.2.1 General.....	9
4.2.2 Mechanical safety	10
4.2.3 Electrical safety.....	10
5 Designation	10
5.1 Cable set	10
5.2 Feed unit	10
6 Marking	11
6.1 Cable set	11
6.2 Feed unit	11
7 Manufacturer's declaration of conformity.....	11

iTech STANDARD PREVIEW
(standards.itech.ai)
<https://standards.itech.ai/catalog/standards/sist/15a146e9-f537-4970-875e-3736bcef7999/sist-en-15869-3-2010>

Figures

Figure 1 — Example of a cable set with extension	7
Figure 2 — Block diagram of a feed unit.....	9

Tables

Table 1 — Maximum length of cable set and extension	8
---	---

Foreword

This document (EN 15869-3:2010) has been prepared by Technical Committee CEN/TC 15 “Inland navigation vessels”, the secretariat of which is held by DIN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by August 2010, and conflicting national standards shall be withdrawn at the latest by August 2010.

EN 15869, *Inland navigation vessels — Electrical shore connection — Three-phase current 400 V, up to 63 A, 50 Hz* comprises:

- *Part 1: General requirements*
- *Part 2: Onshore unit, safety requirements*
- *Part 3: On-board unit, safety requirements*

According to the CEN/GENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

SIST EN 15869-3:2010

<https://standards.iteh.ai/catalog/standards/sist/15a146e9-f537-4970-875e-3736bcef7999/sist-en-15869-3-2010>

Introduction

Inland navigation vessels are equipped with a variety of electrical loads operating at 230 V or 400 V. While underway, continuous electrical power supply is provided by the onboard system from generators driven by diesel engines. When the vessel is berthed, these generators have to remain in operation if there is no suitable onshore power supply available. In some cases, this leads to intense noise pollution both for the crew on the vessel itself and on other vessels lying alongside and also for residents ashore. The exhaust fumes are an additional pollution factor.

The electrical shore connections specified in this standard make it possible to provide the vessels with an electrical power supply while berthed and to eliminate noise and exhaust pollution. This calls for a uniform Europe-wide connection that can be activated and deactivated by the vessel's crew in all ports and berths, if possible, without requiring any assistance from shore-based personnel. This standard contains electrical safety requirements for the prevention of hazards in making, using and breaking the shore connection.

Furthermore, cashless settlement for the electricity used shall be possible, ideally a standard Europe-wide payment system.

Electrical shore connections with a permissible current of over 63 A as used for passenger ships with a hotelling function are not covered by this standard.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 15869-3:2010

<https://standards.iteh.ai/catalog/standards/sist/15a146e9-f537-4970-875e-3736bcef7999/sist-en-15869-3-2010>

1 Scope

This European Standard specifies requirements applicable to equipment for shore-to-vessel supply of three-phase 400 V electrical power up to 63 A and a frequency of 50 Hz to berthed inland navigation vessels.

This part of the European Standard specifies safety requirements for the connection cable and the on-board unit of the electrical shore connection.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 15869-1, *Inland navigation vessels — Electrical shore connection, three phase current 400 V, up to 63 A, 50 Hz — Part 1: General requirements*

EN 15869-2, *Inland navigation vessels — Electrical shore connection, three phase current 400 V, up to 63 A, 50 Hz — Part 2: Onshore unit, safety requirements*

EN 60076-1, *Power transformers — Part 1: General (IEC 60076-1:1993, modified)*

EN 60309-1, *Plugs, socket-outlets and couplers for industrial purposes — Part 1: General requirements (IEC 60309-1:1999)*

EN 60309-2, *Plugs, socket-outlets and couplers for industrial purposes — Part 2: Dimensional interchangeability requirements for pin and contact-tube accessories (IEC 60309-2:1999)*

EN 60309-4, *Plugs, socket-outlets and couplers for industrial purposes — Part 4: Switched socket-outlets and connectors with or without interlock (IEC 60309-4:2006, modified)*

EN 60529, *Degrees of protection provided by enclosures (IP code) (IEC 60529:1989)*

HD 22.16 S2, *Cables of rated voltages up to and including 450/750 V and having cross-linked insulation — Part 16: Water resistant polychloroprene or equivalent synthetic elastomer sheathed cables*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

electrical shore connection

equipment consisting of electrical power-supply station, cable set and feed unit for the supply of electrical power to inland navigation vessels in ports and at berths

[EN 15869-1:2010]

3.2

electrical power-supply station

shore-side part of the electrical shore connection with one or more connector units

[EN 15869-1:2010]

EN 15869-3:2010 (E)

- 3.3**
connector unit
<inland navigation> unit for connecting an inland navigation vessel

[EN 15869-1:2010]
- 3.4**
activation medium
<inland navigation> system for activating the supply of power and cashless settlement of the costs

[EN 15869-1:2010]
- 3.5**
feed unit
<inland navigation> all the onboard devices for receiving the electrical power on board


[EN 15869-1:2010]
- 3.6**
connection cable
insulated, protected (e.g. fire protection) electrical component
- 3.7**
cable set
connection cable fitted with plug and coupler (flexible cable) or plug and permanently installed on one end on the vessel

ITih STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 15869-3:2010
<https://standards.iteh.ai/catalog/standards/sist/15a146e9-f537-4970-875e-3736bcef7999/sist-en-15869-3-2010>

4 Safety requirements

4.1 Cable set

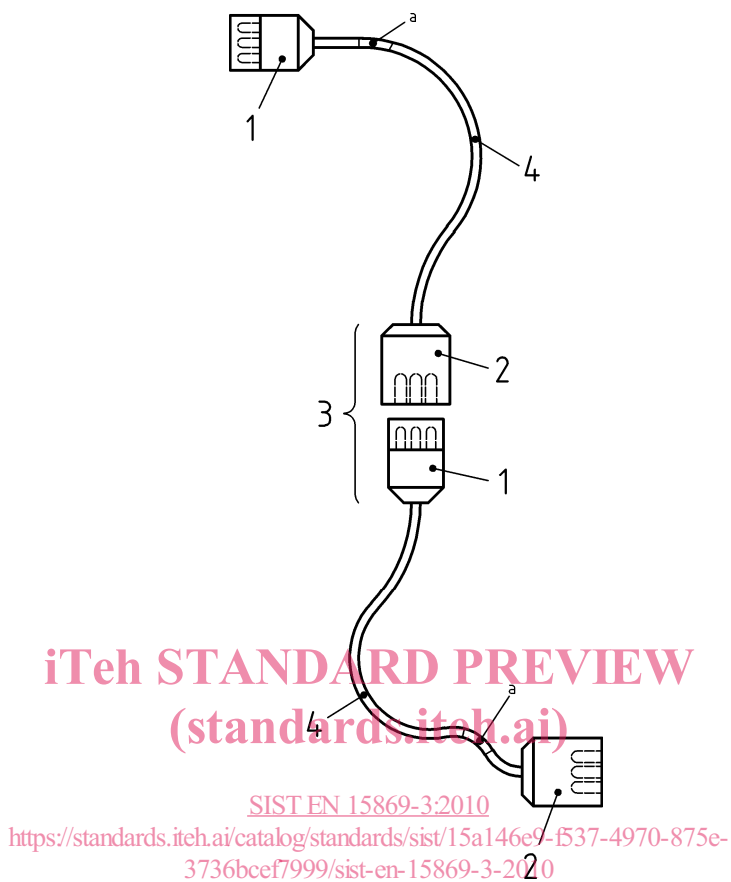

Key

- 1 plug
- 2 coupler
- 3 cable coupler
- 4 connection cable
- 1 + 4 + 2 flexible cable set

^a field for marking

Figure 1 — Example of a cable set with extension

An H07RNF cable according to HD 22.16 S2 shall be used as the cable set as shown in Figure 1. The cross-section shall be as indicated in Table 1.