

SLOVENSKI STANDARD

SIST EN 4622:2010

01-julij-2010

Aeronavtika - Vložki, navoj MJ, samozapiralni, s samozagozdnim ključem, iz topotnoodpornega jekla FE-PA2601 (A286), mazani z MoS₂

Aerospace series - Inserts, MJ threads, self-locking, with self-broaching keys, in heat resisting steel FE-PA2601 (A286), MoS₂ coated

Luft- und Raumfahrt - Gewindegarnituren, MJ-Gewinden, selbstsichernd, mit selbsträumenden Stiften, aus hochwarmfestem Stahl FE-PA2601 (A286), MoS₂ beschichtet

ITEH STANDARD PREVIEW
(standards.iteh.ai)

Série aérospatiale - Douilles filetées, à filetage MJ, à freinage interne, à clavettes auto-brochantes, en acier résistant à chaud FEPA2601 (A286), revêtues MoS₂

<https://standards.iteh.ai/catalog/standards/sist-en-4622-2010>

8275cede76d/sist-en-4622-2010

Ta slovenski standard je istoveten z: EN 4622:2010

ICS:

49.030.10 Navoji Screw threads

SIST EN 4622:2010 en

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 4622:2010](#)

<https://standards.iteh.ai/catalog/standards/sist/f118f248-be3e-4f60-b80f-827f5cede76d/sist-en-4622-2010>

EUROPEAN STANDARD
NORME EUROPÉENNE
EUROPÄISCHE NORM

EN 4622

April 2010

ICS 49.030.30

English Version

Aerospace series - Inserts, MJ threads, self-locking, with self-broaching keys, in heat resisting steel FE-PA2601 (A286), MoS₂ coated

Série aéronautique - Douilles filetées, à filetage MJ, à freinage interne, à clavettes auto-brochantes, en acier résistant à chaud FE-PA2601 (A286), revêtues MoS₂

Luft- und Raumfahrt - Gewindestifte, MJ-Gewinden, selbstsichernd, mit selbsträumenden Stiften, aus hochwarmfestem Stahl FE-PA2601 (A286), MoS₂ beschichtet

This European Standard was approved by CEN on 16 January 2010.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN Management Centre or to any CEN member.

**THE STANDARD PREVIEW
(standardpreview)**

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

http://standards.cen.eu/standardcatalog/sist_en_4622-06-06-4622-2010



EUROPEAN COMMITTEE FOR STANDARDIZATION
 COMITÉ EUROPÉEN DE NORMALISATION
 EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

	Page
Foreword.....	3
Introduction	4
1 Scope	5
2 Normative references	5
3 Required characteristics	5
3.1 Configuration – Dimensions – Tolerances – Masses.....	5
3.2 Material	6
3.3 Surface treatment	6
4 Insert definition	6
4.1 Normal size insert.....	7
4.2 First repair size insert	7
4.3 Second repair size insert	8
4.4 Special thread dimensions	8
5 Designation	9
6 Marking and identification.....	9
7 Technical specification	9

**THE STANDARD PREVIEW
(standards.iteh.ai)**

SIST EN 4622:2010

https://standards.iteh.ai/catalog/standards/sist/f118f248-be3e-4f60-b80f-
827f5cede76d/sist-en-4622-2010

Foreword

This document (EN 4622:2010) has been prepared by the Aerospace and Defence Industries Association of Europe - Standardization (ASD-STAN).

After enquiries and votes carried out in accordance with the rules of this Association, this Standard has received the approval of the National Associations and the Official Services of the member countries of ASD, prior to its presentation to CEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by October 2010, and conflicting national standards shall be withdrawn at the latest by October 2010.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and the United Kingdom.

The STANDARD PREVIEW (standards.iteh.ai)

SIST EN 4622:2010

<https://standards.iteh.ai/catalog/standards/sist/f118f248-be3e-4f60-b80f-827f5cede76d/sist-en-4622-2010>

Introduction

For design and installation procedures, see EN 4620 and EN 4619.

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 4622:2010

<https://standards.iteh.ai/catalog/standards/sist/f118f248-be3e-4f60-b80f-827f5cede76d/sist-en-4622-2010>

1 Scope

This standard specifies the characteristics of self-locking, MJ thread inserts, self-broaching keys, in FE-PA2601, MoS₂ coated, for aerospace applications.

Classification: 1 100 MPa ¹⁾ / 315 °C ²⁾

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 2399, Aerospace series — Heat resisting steel FE-PA2601 (X4NiCrTiMoV26-15) — $R_m \geq 900$ MPa — Bars for forged bolts — $D \leq 25$ mm ³⁾

EN 2424, Aerospace series — Marking of aerospace products

EN 2491, Aerospace series — Molybdenum disulphide dry lubricants — Coating methods

EN 3639, Aerospace series — Heat resisting alloy FE-PA2601 — Softened and cold worked — Wire for forged fasteners — $D \leq 15$ mm — 900 MPa $\leq R_m \leq 1\,100$ MPa ⁴⁾

EN 4619, Aerospace series — Inserts, MJ threads, self-locking, with self-broaching keys — Installation and removal procedure
iTeh STANDARD PREVIEW
(standards.iteh.ai)

EN 4620, Aerospace series — Inserts, MJ threads, self-locking, with self-broaching keys — Design standard

EN 4621, Aerospace series — Inserts, MJ threads, self-locking, self-broaching keys — Technical specification
<https://standards.iteh.ai/catalog/standards/sist/f118f248-be3e-4f60-b80f-82755ca07cd5>

ISO 5855-1, Aerospace — MJ threads — Part 1: General requirements

ISO 5855-2, Aerospace — MJ threads — Part 2: Limit dimensions for bolts and nuts

TR 3198, Aerospace series — Manufacturers' identification monograms and marks for EN aerospace products ⁵⁾

3 Required characteristics

3.1 Configuration – Dimensions – Tolerances – Masses

See Figure 1 and Tables 1, 2, 3 and 4.

Dimensions and tolerances are in millimetres. They apply before MoS₂ coating.

1) Corresponds to the minimum tensile stress which the insert is able to withstand at ambient temperature without breaking or cracking when tested with a bolt of a higher strength class.

2) Maximum temperature that the insert is able to withstand, without permanent alteration to its original characteristics, after ambient temperature has been restored. The maximum temperature is conditioned by the MoS₂ lubricant.

3) Published as ASD Standard at the date of publication of this standard.

4) Published as ASD Prestandard at the date of publication of this standard.

5) Published as ASD Technical Report at the date of publication of this standard.

EN 4622:2010 (E)

3.2 Material

Insert: EN 3639 or EN 2399 treated for 370 HV to 435 HV.

Keys: Stainless steel or Nickel alloy treated for HV > 600.

3.3 Surface treatment

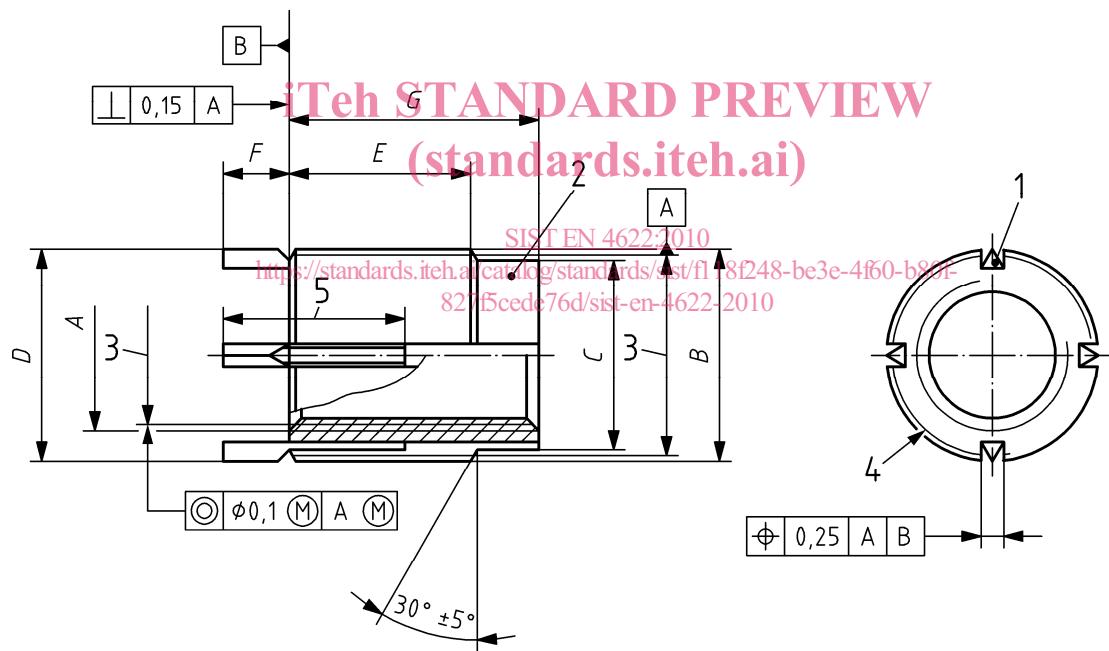
See EN 2491.

4 Insert definition

See Figure 1.

$\nabla \sqrt{Ra \ 3,2}$ [$\nabla \sqrt{Ra \ 1,6}$] [only for key grooves and keys] Values apply before MoS₂ coating.

Remove sharp edges 0,1 mm to 0,4 mm.

**Key**

- 1 N keys equally spaced
- 2 Form out-of-round in this area to achieve the self-locking requirement. Marking of tools is allowed.
- 3 Pitch diameters
- 4 Marking area or on keys left to producer's option
- 5 Total length of the key shall not exceed E min. Dimensions and location of keys shall meet EN 4622 requirements.

Details of form not stated are left to the producer's discretion.

Figure 1

4.1 Normal size insert

See Table 1.

Table 1

A Internal thread ^a Code Designation		B External thread ^b Designation	C^c max.	D 0 - 0,2	E max.	F 0 - 0,2	G max.	N	Mass kg/1 000 parts ≈
050-0	MJ5×0,8-4H6H	MJ9×1-4h6h	7,5	9	5	4,35	8	2	2,2
060-0	MJ6×1-4H5H	MJ10×1-4h6h	8,5	10	6,5		10	2	3,3
070-0	MJ7×1-4H5H	MJ11×1-4h6h	9,5	11	8		11,5	2	4,4
080-0	MJ8×1-4H5H	MJ12×1-4h6h	10,5	12	9,5		13,5	4	5,7
100-0	MJ10×1,25-4H5H	MJ14×1-4h6h	12,5	14	12		16,5	4	8,9

^a In accordance with ISO 5855-2.

^b In accordance with ISO 5855-1.

^c After deformation.

4.2 First repair size insert

iTeh STANDARD PREVIEW (standards.iteh.ai)

See Table 2.

Table 2
SIST EN 4622:2010

A Internal thread ^a Code Designation		B External thread ^b Designation	C^c max.	D 0 - 0,2	E max.	F 0 - 0,2	G max.	N	Mass kg/1 000 parts ≈
050-1	MJ5×0,8-4H6H	MJ10×1-4h6h	7,5	10	5	4,35	8	2	2,7
060-1	MJ6×1-4H5H	MJ11×1-4h6h	8,5	11	6,5		10	2	4,1
070-1	MJ7×1-4H5H	MJ12×1-4h6h	9,5	12	8		11,5	2	5,4
080-1	MJ8×1-4H5H	MJS13×1-4h6h	10,5	13	9,5		13,5	4	7,1
100-1	MJ10×1,25-4H5H	MJ15×1-4h6h	12,5	15	12		16,5	4	11,0

^a In accordance with ISO 5855-2.

^b In accordance with ISO 5855-1 except MJS13×1-4h6h thread which shall be in accordance with Table 4.

^c After deformation.