INTERNATIONAL STANDARD

ISO 20567-2

First edition 2005-02-15

Paints and varnishes — Determination of stone-chip resistance of coatings —

Part 2: Single-impact test with a guided impact body

Teh ST Peintures et vernis — Détermination de la résistance des revêtements aux impacts de cailloux —

Partie 2: Essai de choc simple par corps de choc à vol conduit

ISO 20567-2:2005 https://standards.iteh.ai/catalog/standards/sist/4c9f038d-9718-4c79-95b8-94409599ec17/iso-20567-2-2005



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 20567-2:2005 https://standards.iteh.ai/catalog/standards/sist/4c9f038d-9718-4c79-95b8-94409599ec17/iso-20567-2-2005

© ISO 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Cont	tents Pa	age
	ord	
Introdu	uction	
1	Scope	1
2	Normative references	1
3	Principle	1
4	Apparatus and materials	2
5	Sampling	
6	Test panels	2
7	Procedure	4
8	Evaluation	5
9	Precision	6
10	Test report	7
Annex	A (normative) Calibration of the test apparatus PREVIEW	8
	(standards.iteh.ai)	

ISO 20567-2:2005 https://standards.iteh.ai/catalog/standards/sist/4c9f038d-9718-4c79-95b8-94409599ec17/iso-20567-2-2005

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 20567-2 was prepared by Technical Committee ISO/TC 35, *Paints and varnishes*, Subcommittee SC 9, *General test methods for paints and varnishes*.

ISO 20567 consists of the following parts, under the general title Paints and varnishes — Determination of stone-chip resistance of coatings: (standards.iteh.ai)

— Part 1: Multi-impact testing

ISO 20567-2:2005

— Part 2: Single-impact test with a guided impact body.

Part 2: Single-impact test with a guided impact body.

4409599ec 17/iso-20567-2-2005

Introduction

In the automobile industry, multi-layer paint coatings are applied to car bodies for protection. Grit, road-metal and other materials can damage these coatings in such a way that individual layers come off or the whole coating delaminates from the substrate.

Stone chipping can be simulated by means of single- and/or multi-impact tests. Part 1 of this International Standard describes multi-impact testing, Part 2 describes a single-impact test.

This part of ISO 20567 is based on the German Standard DIN 55996-2:2001, Beschichtungsstoffe — Prüfung der Steinschlagfestigkeit von Beschichtungen — Teil 2: Einzelschlagprüfung (Paints and varnishes — Stone chip resistance test for coatings — Part 2: Single impact test).

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 20567-2:2005 https://standards.iteh.ai/catalog/standards/sist/4c9f038d-9718-4c79-95b8-94409599ec17/iso-20567-2-2005

© ISO 2005 – All rights reserved

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 20567-2:2005

https://standards.iteh.ai/catalog/standards/sist/4c9f038d-9718-4c79-95b8-94409599ec17/iso-20567-2-2005

Paints and varnishes — Determination of stone-chip resistance of coatings —

Part 2:

Single-impact test with a guided impact body

1 Scope

This part of ISO 20567 specifies a method for the evaluation of the resistance of automobile finishes and other coatings to the impact of a wedge-shaped body projected onto the surface under test to simulate the impact of stones.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1513, Paints and varnishes — Examination and preparation of samples for testing

https://standards.iteh.ai/catalog/standards/sist/4c9f038d-9718-4c79-95b8-

ISO 1514, Paints and varnishes — Standard panels for testing 005

ISO 2808, Paints and varnishes — Determination of film thickness

ISO 3270, Paints and varnishes and their raw materials — Temperatures and humidities for conditioning and testing

ISO 15528, Paints, varnishes and raw materials for paints and varnishes — Sampling

IEC 60454-2, Specification for pressure-sensitive adhesive tapes for electrical purposes — Part 2: Methods of test

3 Principle

The stone-chip resistance of the coating under test is checked by projecting a defined impact body onto it. The impact body used in the test has a wedge-shaped cutting edge to obtain a damage pattern equivalent to that produced in a multi-impact test. The wedge-shaped impact body is pushed onto the coating under test by the transmission of a pulse of energy from a steel ball accelerated using compressed air.

Loose fragments of coating material are removed using adhesive tape.

The stone-chip resistance is evaluated visually or by means of optical imaging.

© ISO 2005 – All rights reserved

4 Apparatus and materials

Ordinary laboratory apparatus, plus the following:

4.1 Single-impact tester

Figure 1 shows the test apparatus.

Figure 2 shows the shape of the impact body and its dimensions. The impact body shall be made of hardened steel (hardness 60 HRC to 62 HRC).

The impact body is inserted in the tester with the wedge-shaped end touching the coated test panel and the spring exerting a slight pressure on the body. A steel ball of mass inferior to that of the impact body is accelerated by a compressed-air blast ($p = 300 \text{ kPa}^{1}$) and transmits part of its energy to the impact body, which then strikes the test panel.

The impact body shall be checked, and replaced if necessary, after a maximum of 500 test runs (i.e. after 500 impacts) or at the end of the series of tests during which the impact body passes the point at which it has been used for a total of 500 test runs.

4.2 Adhesive tape

Unless otherwise agreed, adhesive tape with an adhesive strength between 6 N/25 mm width and 10 N/25 mm width (tested in accordance with IEC 60454-2) shall be used. The tape shall be at least 25 mm wide.

Teh STANDARD PREVIEW

(standards.iteh.ai)

5 Sampling

ISO 20567-2:2005

Take a representative sample of the coating material to be tested, as described in ISO 15528.

94409599ec17/iso-20567-2-2005

Examine and prepare each sample for testing, as described in ISO 1513.

6 Test panels

6.1 Substrate

Unless otherwise agreed, use 200 mm \times 100 mm steel test panels that are between 0,7 mm and 1,0 mm thick.

6.2 Preparation and coating


Unless otherwise agreed, prepare each test panel in accordance with ISO 1514 before coating and drying or stoving it. Use the application method specified by the paint manufacturer.

6.3 Thickness of the coating

Determine the thickness, in micrometres, of the dry coating by one of the procedures specified in ISO 2808.

_

^{1) 100} kPa = 1bar.

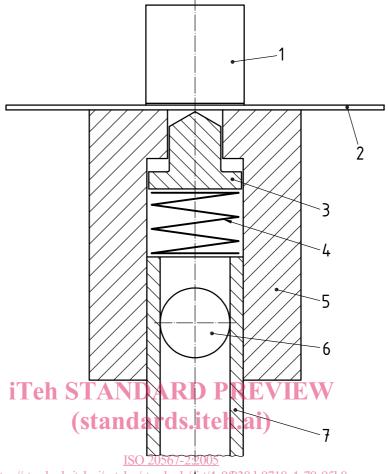

https://standards.iteh.ai/catalog/standards/sist/4c9f038d-9718-4c79-95b8-94409599ec17/iso-20587-2-2005

Key

- 1 counterweight (mass exceeding 1 kg)
- 2 test panel
- 3 impact body
- 4 steel spring, diameter of wire 0,8 mm, 2,5 windings
- 5 housing
- 6 steel ball, hardness 60 HRC to 66 HRC
- 7 pipe, bore 8,6^{0,015} mm
- 8 compressed air

Figure 1 — Test apparatus showing position of impact body