
**Road vehicles — Vehicle test methods for
electrical disturbances from narrowband
radiated electromagnetic energy —**

**Part 3:
On-board transmitter simulation**

iTeh STANDARD PREVIEW
*Véhicules routiers — Méthodes d'essai d'un véhicule soumis à des
perturbations électriques par rayonnement d'énergie électromagnétique
en bande étroite*
(standard.iteh.ai)

Partie 3: Simulation des émetteurs embarqués

ISO 11451-3:2007

<https://standards.iteh.ai/catalog/standards/sist/cfd417c-cae5-4808-8260-f63666a987d5/iso-11451-3-2007>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

ISO 11451-3:2007

<https://standards.iteh.ai/catalog/standards/sist/cfdd417c-cae5-4808-8260-f63666a987d5/iso-11451-3-2007>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions.....	1
4 Test conditions	1
5 Test location.....	2
5.1 General.....	2
5.2 Absorber lined shielded enclosure (ALSE).....	2
5.3 Outdoor test site	2
6 Test instrumentation	2
6.1 General.....	2
6.2 Signal sources	2
6.3 RF power and field monitoring equipment	3
6.4 Antennas.....	3
6.5 Stimulation and monitoring of the device under test	4
7 Test set-up.....	4
7.1 Transmitters with antenna outside the vehicle.....	4
7.2 Transmitters with antenna inside the vehicle.....	8
8 Test procedure	11
8.1 General.....	11
8.2 Test plan	11
8.3 Test method.....	12
8.4 Test report	14
Annex A (informative) Typical characteristics of on-board transmitters	15
Annex B (informative) Guidance on tuning antennas on the vehicle for minimum voltage standing wave ratio (VSWR)	18
Bibliography	21

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 11451-3 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electrical and electronic equipment*.

This second edition cancels and replaces the first edition (ISO 11451-3:1994), which has been technically revised.

ISO 11451 consists of the following parts, under the general title *Road vehicles — Vehicle test methods for electrical disturbances from narrowband radiated electromagnetic energy*:

- *Part 1: General principles and terminology*
- *Part 2: Off-vehicle radiation sources*
- *Part 3: On-board transmitter simulation*
- *Part 4: Bulk current injection (BCI)*

Road vehicles — Vehicle test methods for electrical disturbances from narrowband radiated electromagnetic energy —

Part 3: On-board transmitter simulation

1 Scope

This part of ISO 11451 specifies methods for testing the immunity of passenger cars and commercial vehicles to electromagnetic disturbances from on-board transmitters connected to an external antenna and portable transmitters with integral antennas, regardless of the vehicle propulsion system (e.g. spark ignition engine, diesel engine, electric motor).

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 11451-1, *Road vehicles — Vehicle test methods for electrical disturbances from narrowband radiated electromagnetic energy — Part 1: General principles and terminology*

ISO 11451-2, *Road vehicles — Vehicle test methods for electrical disturbances from narrowband radiated electromagnetic energy — Part 2: Off-vehicle radiation sources*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 11451-1 and the following apply.

3.1

integral antenna

permanent fixed antenna which may be built-in, designed as an indispensable part of the portable transmitting device

4 Test conditions

The applicable frequency range of the test method is 1,8 MHz to 18 GHz.

The user of this part of ISO 11451 shall specify the test severity level or levels over the frequency bands. Typical on-board transmitter characteristics (frequency bands, power level and modulation) are given in Annex A.

NOTE Users of this part of ISO 11451 should be aware that Annex A is for information only and cannot be considered as an exhaustive description of various on-board transmitters available in all countries.

Standard test conditions are given in ISO 11451-1 for the following:

- test temperature;
- supply voltage;
- dwell time;
- test signal quality.

5 Test location

5.1 General

This test would typically be performed in an absorber lined shielded enclosure (ALSE). Where national regulations permit, the test can also be performed at an outdoor test site.

5.2 Absorber lined shielded enclosure (ALSE)

An absorber lined shielded enclosure with the characteristics specified in ISO 11451-2 is adequate for this test.

NOTE At frequencies where absorbers are not effective, the reflections in the chamber can affect the exposure of the vehicle.

5.3 Outdoor test site

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Where national regulations permit the use of an outdoor test site, the outdoor test site should have an area with a radius of 20 m free from large metal structures or objects. When performing outdoor test-site tests, care shall be taken to ensure that harmonic suppression regulations are met.

<https://standards.iteh.ai/catalog/standards/sist/cfdd417c-cae5-4808-8260-f63666a987d5/iso-11451-3-2007>

6 Test instrumentation

6.1 General

The following test instrumentation is used:

- signal sources with internal or external modulation capability;
- power amplifier(s);
- power meter (or equivalent measuring instrument) to measure the forward and reverse power;
- field generating devices: antennas;
- field probes (for environmental monitoring).

6.2 Signal sources

6.2.1 Transmitters with antenna outside the vehicle

Signal sources for transmitters with antenna outside the vehicle can be:

- simulated on-board transmitters: use of a signal generator and broadband power amplifier;
- commercial on-board transmitters installed in vehicle capable of generating radio frequency (RF) power in their operational frequency ranges with specific output power.

NOTE When using simulated on-board transmitters, it is advisable to place an RF choke (ferrite or powdered iron toroid, depending on frequency) around the coaxial cable to the antenna, in order to reduce skin currents and more closely simulate a transmitter installed in the vehicle.

6.2.2 Transmitters with antenna inside the vehicle

Signal sources for transmitters with antenna inside the vehicle can be:

- simulated portable transmitters: use of a metallic box with similar dimension to the portable transmitter and amplifier (if needed);
- commercial portable transmitters with integral antennas.

6.3 RF power and field monitoring equipment

An in-line power meter is required when using simulated on-board transmitters for measuring power to the antenna. Both forward power and reverse power shall be measured and recorded.

The appropriate guidelines (national regulation, ICNIRP^[1], etc.) shall be followed for the protection of the test personnel.

6.4 Antennas

6.4.1 Transmitters with antenna outside the vehicle

6.4.1.1 Simulated on-board transmitters

When an original equipment manufacturer (OEM) antenna is not installed on the vehicle, the antenna(s) described below shall be used.

- For frequency ranges lower than 30 MHz, loaded antennas shall be used. Loaded antennas employ lumped or distributed reactive components with a radiating element physically shorter than quarter wave at resonance.
- For frequency ranges higher than 30 MHz, e.g. for the very high frequency (VHF) and ultra high frequency (UHF) bands, quarter wave antennas should be given preference over 5/8 wave antennas, since there are higher skin currents created by quarter wave antennas.

All antennas shall be tuned on the vehicle for minimum voltage standing wave ratio (VSWR, typically less than 2:1), unless otherwise specified in the test plan. As a minimum, the VSWR value shall be recorded with the antenna on the vehicle at the lower and upper band edge and at a middle frequency (see Annex B for guidance).

NOTE The resulting VSWR is compatible with the design of the RF source.

When an OEM antenna is actually installed on the vehicle, this antenna shall be used for the test in the appropriate frequency range. In this case, the VSWR shall not be adjusted, but shall be recorded.

6.4.1.2 Commercial on-board transmitters

The vehicle OEM antenna shall be used for the test in the appropriate frequency range. In this case, the VSWR shall not be adjusted.

6.4.2 Transmitters with antenna inside the vehicle

6.4.2.1 Simulated portable transmitter

A passive antenna (e.g. quarter wave antenna with counterpoise, sleeve antenna, patch antenna) shall be used.

All antennas shall be tuned on the vehicle for minimum VSWR (typically less than 2:1), unless otherwise specified in the test plan. The antenna shall be tuned in the laboratory to obtain minimum required VSWR with the counterpoise that is intended to be used with the antenna while testing in the vehicle.

As a minimum, the VSWR value shall be recorded with the antenna in the vehicle at the lower and upper band edge and at a middle frequency (see Annex B for guidance).

NOTE The resulting VSWR is compatible with the design of the RF source.

6.4.2.2 Commercial portable transmitters

When a commercial portable transmitter with integral antenna is used, its antenna shall be used for the test in the appropriate frequency range. In this case, the VSWR shall not be adjusted.

6.5 Stimulation and monitoring of the device under test

If remote stimulation and monitoring are required in the test plan, the vehicle shall be operated by actuators which have a minimum effect on the electromagnetic characteristics, e.g. plastic blocks on the push-buttons, pneumatic actuators with plastic tubes.

Connections to monitoring equipment may be accomplished by using fibre-optics or high resistance leads. Other types of leads may be used, but they require extreme care to minimize interactions. The orientation, length and location of such leads shall be carefully documented to ensure repeatability of test results.

Any electrical connection of monitoring equipment to the vehicle may cause malfunctions of the vehicle. Extreme care shall be taken to avoid such an effect.

7 Test set-up


7.1 Transmitters with antenna outside the vehicle

7.1.1 Simulated on-board transmitters

The test can be performed with test antenna(s) or with the vehicle's OEM antenna, as defined in 6.4.1.1.

When a test antenna is used, the location(s) of the transmitting antenna on the vehicle shall be defined in the test plan. If no specific location(s) are agreed between the users of this part of ISO 11451, the following location (s) are recommended, as illustrated in Figure 1:

- locations 1 (vehicle roof, front) and 2 (vehicle roof, rear) are the default locations for frequencies ≥ 30 MHz;
- location 9 (bumper) is the default location for frequencies < 30 MHz.

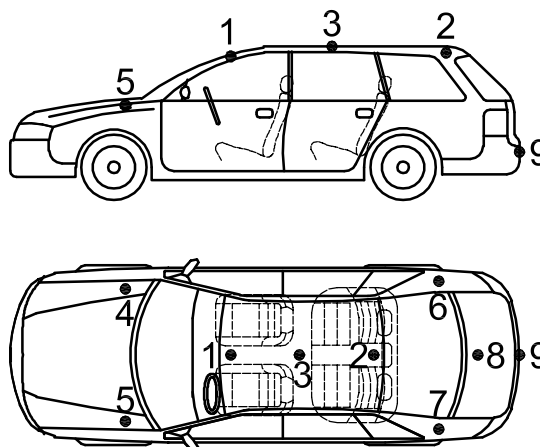

Key

- 1 vehicle roof (front)
- 2 vehicle roof (rear)
- 3 vehicle roof (middle)
- 4 fender (front, right)
- 5 fender (front, left)
- 6 fender (rear, right)
- 7 fender (rear, left)
- 8 trunk lid (middle)
- 9 bumper (middle)

iTeh STANDARD PREVIEW (standards.iteh.ai)

Figure 1 — Recommended locations for antennas outside the vehicle

[ISO 11451-3:2007](https://standards.iteh.ai/catalog/standards/sist/cfdd417c-cae5-4808-8260-f63666a987d5/iso-11451-3-2007)


[https://standards.iteh.ai/catalog/standards/sist/cfdd417c-cae5-4808-8260-](https://standards.iteh.ai/catalog/standards/sist/cfdd417c-cae5-4808-8260-f63666a987d5/iso-11451-3-2007)

[f63666a987d5/iso-11451-3-2007](https://standards.iteh.ai/catalog/standards/sist/cfdd417c-cae5-4808-8260-f63666a987d5/iso-11451-3-2007)

When the vehicle OEM antenna is used, it should be used as it is installed in the vehicle without any change of antenna characteristics (location, VSWR, etc.).

Examples of test set-up for simulated on-board transmitters are shown in Figure 2 (use of test antenna) and Figure 3 (use of vehicle OEM antenna).

NOTE When the vehicle OEM antenna is used for multiple transmitters/receivers frequency, it is advisable not to use a simulated on-board transmitter (with “broadband” amplifier). The amplifier noise level can be sufficient to degrade some vehicle functions, like GPS satellite reception. The validation of such functions (relative to vehicle on-board-transmitter immunity) can only be performed with the vehicle OEM on-board transmitter. In this case, it may be necessary to operate the on-board vehicle transmitter in real conditions. This can be performed by using specific equipments, like a GSM base station simulator (see 7.1.2 and Figure 4)

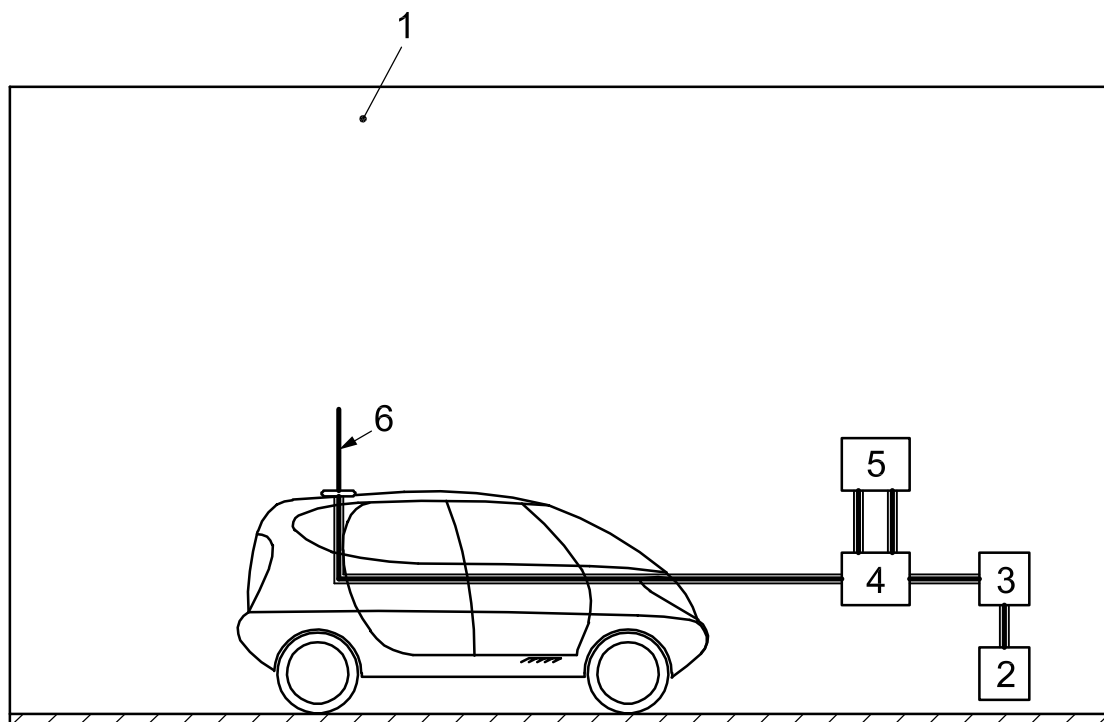

Key

- 1 ALSE
- 2 RF signal generator (can be outside test facility)
- 3 power amplifier (can be outside test facility)
- 4 dual directional coupler (can be outside test facility)
- 5 power meter (can be outside test facility)
- 6 test antenna (positions defined in test plan)

iTeh STANDARD PREVIEW


(standards.iteh.ai)

ISO 11451-3:2007

[https://standards.iteh.ai/catalog/standards/sist/cfd417c-cae5-4808-8260-](https://standards.iteh.ai/catalog/standards/sist/cfd417c-cae5-4808-8260-f63666a987d5/iso-11451-3-2007)

[f63666a987d5/iso-11451-3-2007](https://standards.iteh.ai/catalog/standards/sist/cfd417c-cae5-4808-8260-f63666a987d5/iso-11451-3-2007)

Figure 2 — Example of test set-up for simulated on-board transmitter and test antenna

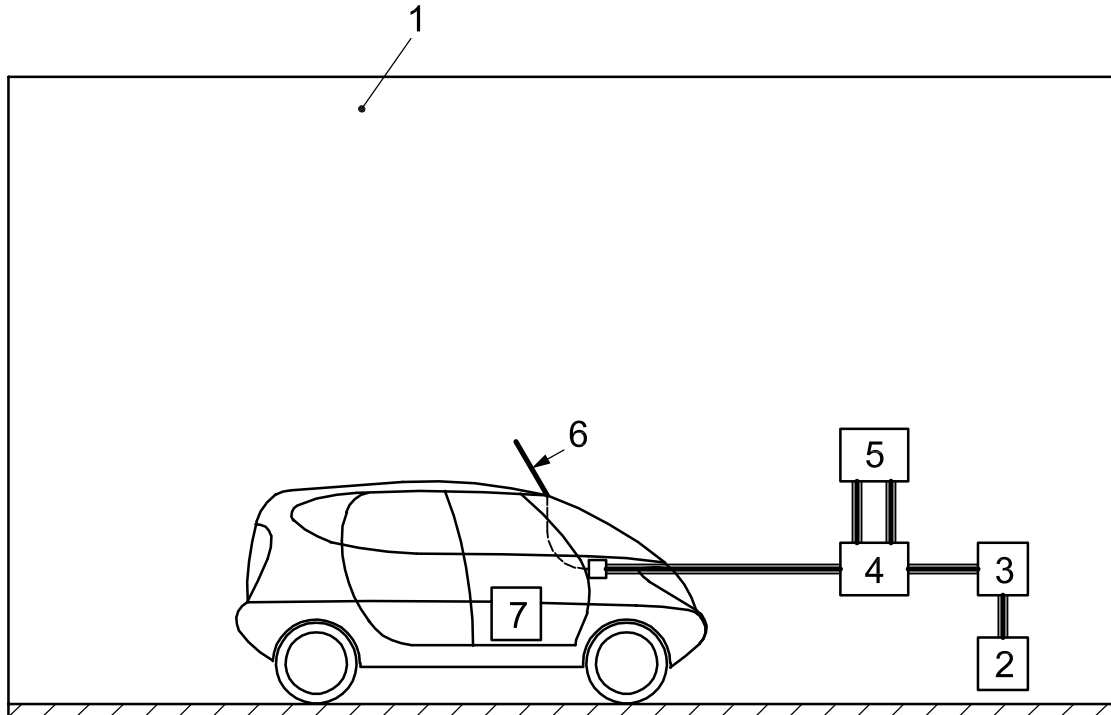**Key**

- 1 ALSE
- 2 RF signal generator (can be outside test facility)
- 3 power amplifier (can be outside test facility)
- 4 dual directional coupler (can be outside test facility)
- 5 power meter (can be outside test facility)
- 6 vehicle OEM antenna
- 7 on-board transmitter (disconnected from vehicle antenna)

Figure 3 — Example of test set-up for simulated on-board transmitter and vehicle OEM antenna

7.1.2 Commercial on-board transmitters

The vehicle commercial on-board transmitter and OEM antenna should be used as it is installed in the vehicle, without any change of transmitter and antenna characteristics (location, VSWR, etc.).

The modulation signal of the on-board transmitter may be performed with a signal generator connected at the on-board transmitter microphone input (the OEM microphone shall be disconnected).

An example of test set-up for commercial on-board transmitters is shown in Figure 4.