



# SLOVENSKI STANDARD

## SIST EN 15195:2015

01-januar-2015

Nadomešča:  
SIST EN 15195:2007

---

**Tekoči naftni proizvodi - Ugotavljanje zakasnitve vžiga in izpeljanega cetanskega števila (DCN) srednjih destilatov s sežigom v komori s stalno prostornino**

Liquid petroleum products - Determination of ignition delay and derived cetane number (DCN) of middle distillate fuels by combustion in a constant volume chamber

Flüssige Mineralölerzeugnisse - Bestimmung des Zündverzugs und der abgeleiteten Cetanzahl (ACZ) von Kraftstoffen aus Mitteldestillaten in einer Verbrennungskammer mit konstantem Volumen

Produits pétroliers liquides - Détermination de délai d'inflammation et de l'indice de cétane dérivé (ICD) des distillats moyens par combustion dans une chambre à volume constant

**Ta slovenski standard je istoveten z: EN 15195:2014**

---

**ICS:**

75.160.20      Tekoča goriva      Liquid fuels

**SIST EN 15195:2015**      en,de

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 15195:2015

<https://standards.iteh.ai/catalog/standards/sist/54e16972-5324-40ce-830a-ee73e7815a89/sist-en-15195-2015>

EUROPEAN STANDARD

EN 15195

NORME EUROPÉENNE

EUROPÄISCHE NORM

November 2014

ICS 75.160.20

Supersedes EN 15195:2007

English Version

## Liquid petroleum products - Determination of ignition delay and derived cetane number (DCN) of middle distillate fuels by combustion in a constant volume chamber

Produits pétroliers liquides - Détermination de délai d'inflammation et de l'indice de cétane dérivé (ICD) des distillats moyens par combustion dans une enceinte à volume constant

Flüssige Mineralölzeugnisse - Bestimmung des Zündverzugs und der abgeleiteten Cetanzahl (ACZ) von Kraftstoffen aus Mitteldestillaten in einer Verbrennungskammer mit konstantem Volumen

This European Standard was approved by CEN on 20 September 2014.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION  
COMITÉ EUROPÉEN DE NORMALISATION  
EUROPÄISCHES KOMITEE FÜR NORMUNG

**CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels**

<b>Contents</b>		<b>Page</b>
Foreword.....		4
Introduction .....		5
1 Scope .....		6
2 Normative references .....		6
3 Terms and definitions .....		7
4 Principle .....		8
5 Reagents and materials .....		8
6 Apparatus .....		9
6.1.1 General.....		9
7 Sampling.....		11
8 Apparatus assembly and installation .....		11
9 Preparation of apparatus .....		11
9.1 System start-up and warm-up .....		11
9.2 Standard operating and test conditions.....		12
10 Calibration, verification and quality control .....		13
10.1 General.....		13
10.2 Calibration .....		13
10.3 Apparatus verification.....		14
10.4 Quality control (QC).....		14
11 Test procedure .....		14
12 Calculation.....		15
13 Expression of results .....		15
14 Precision .....		15
14.1 General.....		15
14.2 Repeatability.....		15
14.3 Reproducibility.....		15
15 Test report .....		16
<b>Annex A (normative) Test apparatus description .....</b>		<b>17</b>
A.1 General.....		17
A.2 Apparatus description and assembly.....		17
A.3 Utilities .....		19
A.4 Control and data acquisition .....		19
A.5 Auxiliary apparatus.....		19
<b>Annex B (normative) Operational details in support to the standard test procedure .....</b>		<b>20</b>
B.1 Fuel injection system flushing .....		20
B.2 Fuel injection system filling and purging.....		20
B.3 Test sequence .....		21
B.3.1 General.....		21

<b>B.3.2</b>	<b>Test sequence</b> .....	<b>21</b>
<b>B.3.3</b>	<b>Data record</b> .....	<b>22</b>
<b>B.4</b>	<b>Fuel injection system cleaning</b> .....	<b>23</b>
<b>B.5</b>	<b>Alternative fuel injection system cleaning</b> .....	<b>23</b>
<b>Annex C</b>	<b>(informative) Apparatus maintenance</b> .....	<b>25</b>
<b>C.1</b>	<b>General</b> .....	<b>25</b>
<b>C.2</b>	<b>Daily maintenance</b> .....	<b>25</b>
<b>C.3</b>	<b>Weekly maintenance</b> .....	<b>25</b>
<b>C.4</b>	<b>Yearly maintenance</b> .....	<b>25</b>
<b>Annex D</b>	<b>(informative) Equation outside scope of method</b> .....	<b>26</b>
<b>Bibliography</b>	.....	<b>27</b>

## **iTeh STANDARD PREVIEW** **(standards.iteh.ai)**

[SIST EN 15195:2015](https://standards.iteh.ai/catalog/standards/sist/54e16972-5324-40ce-830a-ee73e7815a89/sist-en-15195-2015)

<https://standards.iteh.ai/catalog/standards/sist/54e16972-5324-40ce-830a-ee73e7815a89/sist-en-15195-2015>

**EN 15195:2014 (E)****Foreword**

This document (EN 15195:2014) has been prepared by Technical Committee CEN/TC 19 "Gaseous and liquid fuels, lubricants and related products of petroleum, synthetic and biological origin", the secretariat of which is held by NEN.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by May 2015 and conflicting national standards shall be withdrawn at the latest by May 2015.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes EN 15195:2007.

Based on new data sets used and experience in the field, the major updates towards the former version are:

- based on recent data from EI and ASTM correlation schemes precision of the method has been improved (by around 25 %) and a common global precision statement for EN 15195 has been incorporated (see also the Introduction) [9];
- the ignition delay range has been expanded to 2,8 ms to 6,3 ms (71 DCN to 34 DCN), where it used to be 3,3 ms to 6,4 ms (61 DCN to 34 DCN);
- the scope has been expanded to from diesel blends with 7 % (V/V) up to 30 % (V/V) of FAME;
- the test procedure has been updated following experience in the market;
- the standard operating and test conditions have been more precisely defined;
- the calibration information has been improved;
- an alternative system cleaning procedure has been introduced in Annex B.

According to the CEN-CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.

## Introduction

This document is derived from joint standardization work in the Energy Institute and ASTM International. It has originally been based on IP 498/06 [1] published by the Energy Institute and harmonized with equivalent ASTM [2] Standards.

The described method is an alternative quantitative determination of the cetane number of middle distillate fuels intended for use in compression ignition engines. Correlation studies between this method and EN ISO 5165 have been done and the results of this are incorporated in this European Standard.

The basis of this method is the derived cetane number correlation equation as given in Clause 13. The on-going validation of the equation is monitored and evaluated through the existing monthly American and European fuel exchange programs. The validation data will be reviewed by CEN/TC 19 with a frequency of at least every two years. As a result of the review, CEN/TC 19 may make the decision to, if necessary, modify the existing equation/correlation or develop a new one. As part of this review, the sample types will be examined, and if certain types are underrepresented, further steps may be taken to evaluate how they perform.

For the moment the basics of one type of apparatus are described<sup>1</sup>. Once more correlation data on different types of derived cetane number testing equipment is available, CEN/TC 19 will consider revising this European Standard.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 15195:2015](#)

<https://standards.iteh.ai/catalog/standards/sist/54e16972-5324-40ce-830a-ee73e7815a89/sist-en-15195-2015>

---

<sup>1</sup> The injection pump in the currently described apparatus is covered by a patent.

## EN 15195:2014 (E)

## 1 Scope

This European Standard specifies a test method for the quantitative determination of ignition delay of middle distillate fuels intended for use in compression ignition engines. The method utilizes a constant volume combustion chamber designed for operation by compression ignition, and employing direct injection of fuel into compressed air that is controlled to a specified pressure and temperature. An equation is given to calculate the derived cetane number (DCN) from the ignition delay measurement.

This European Standard is applicable to diesel fuels, including those containing fatty acid methyl esters (FAME) up to 30 % (V/V). The method is also applicable to middle distillate fuels of non-petroleum origin, oil-sands based fuels, blends of fuel containing biodiesel material, diesel fuel oils containing cetane number improver additives and low-sulfur diesel fuel oils. However, users applying this standard especially to unconventional distillate fuels are warned that the relationship between derived cetane number and combustion behaviour in real engines is not yet fully understood.

The test method is also applicable to the quantitative determination of the ignition characteristics of FAME, especially the ignition delay. However the correlation data available were inconclusive about the precision of the equation. So the determination of derived cetane number for FAME fuel, also known as B100, has not been included in the precision determination as in Clause 12<sup>2)</sup>.

This European Standard covers the ignition delay range from 2,8 ms to 6,3 ms (71 DCN to 34 DCN). The combustion analyser can measure shorter or longer ignition delays, but precision is not known. For these shorter or longer ignition delays the correlation equation for DCN is given in Annex D.

NOTE 1 There is no information about how DCNs outside the 34 to 71 range compares to EN ISO 5165.

NOTE 2 For the purpose of this European Standard the expression “% (V/V)” is used to represent the volume fraction and “% (m/m)” the mass fraction.

**WARNING — The use of this standard may involve hazardous materials, operations and equipment. This standard does not purport to address all of the safety problems associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.**

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN ISO 3170, *Petroleum liquids — Manual sampling (ISO 3170)*

EN ISO 3171, *Petroleum liquids — Automatic pipeline sampling (ISO 3171)*

EN ISO 3696, *Water for analytical laboratory use — Specification and test methods (ISO 3696)*

EN ISO 5165:1998, *Petroleum products — Determination of the ignition quality of diesel fuels — Cetane engine method (ISO 5165:1998)*

ISO 1998-2:1998, *Petroleum industry — Terminology — Part 2: Properties and tests*

ISO 4010, *Diesel engines — Calibrating nozzle, delay pintle type*

<sup>2)</sup> A further Round Robin study for B100 samples is being considered by CEN.



IP 537, Determination of the purity of Derived Cetane Number reference materials — Gas chromatography method

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 1998-2:1998 and the following apply.

#### 3.1

##### **cetane number**

##### **CN**

measure of the ignition performance of a diesel fuel in a standardized engine test on a scale defined by reference fuels

Note 1 to entry: It is expressed as the percentage by volume of hexadecane (cetane) in a reference blend having the same ignition delay as the fuel for analysis. The higher the cetane number, the shorter the ignition delay.

Note 2 to entry: ISO 1998-2 expresses it as “number on a conventional scale, indicating the ignition quality of a diesel fuel under standardized conditions”, but for this document the definition as given is chosen as with new equipment on the market since 1998 the reference to an engine has become essential.

#### 3.2

##### **ignition delay**

##### **ID**

period of time, in milliseconds, between the start of fuel injection and the start of combustion

Note 1 to entry: In the context of this standard, this period is determined by movement and pressure sensors in the instrument.

#### 3.3

##### **derived cetane number**

##### **DCN**

number calculated by using an equation that correlates a combustion analyser's ignition delay to the cetane number

#### 3.4

##### **accepted reference value**

##### **ARV**

value agreed upon as a reference for comparison

Note 1 to entry: The value is derived as (1) a theoretical or established value, based in scientific principles, (2) an assigned value, based on experimental work of some national or international organization, or (3) a consensus value based on collaborative experimental work under the auspices of a scientific or engineering group.

#### 3.5

##### **quality control sample**

##### **QC**

stable and homogenous material(s) similar in nature to the materials under test, properly stored to ensure integrity, and available in sufficient quantity for repeated long-term testing

#### 3.6

##### **calibration reference fluid**

stable and homogenous fluid used to calibrate the performance of the combustion analyzer

#### 3.7

##### **verification reference fluid**

stable and homogenous fluid used to verify the performance of the combustion analyzer

## EN 15195:2014 (E)

## 4 Principle

A test portion of the material under test is injected into a heated temperature- and pressure-controlled constant volume combustion chamber which has previously been charged with compressed air. Sensors detect the start of injection and the start of combustion for each single-shot cycle. A complete test sequence consists of 15 preliminary combustion cycles to ensure apparatus equilibrium and 32 subsequent test cycles to obtain ignition delay values. The average ignition delay (ID) of these 32 cycles is inserted into an equation to obtain the derived cetane number (DCN). The DCN obtained by this procedure is an estimate of the cetane number (CN) obtained from the conventional large-scale engine test EN ISO 5165.

## 5 Reagents and materials

**5.1 Water**, unless otherwise specified, meeting the requirements for grade 3 of EN ISO 3696.

**5.2 Coolant system fluid**, 50:50 (V/V) mixture of commercial grade radiator antifreeze (aluminium-compatible, ethylene glycol-type) with water (5.1).

NOTE This mixture meets the boiling point requirements and gives adequate protection of the coolant system against corrosion and mineral scale that can alter heat transfer and rating results. See the manufacturer's manual for the correct ethylene glycol-type antifreeze quality.

**5.3 Calibration reference fluid**, heptane of a purity of minimum 99,5 % (m/m) to be used as the designated 3,78 ms ignition delay accepted reference value material.

If the initial purity is not known the purity shall be checked in accordance with IP 537.

**5.4 Verification reference fluid**, methylcyclohexane of a purity of minimum 99,0 % (m/m) to be used as the designated 10,4 ms ignition delay accepted reference value material.

If the initial purity is not known the purity shall be checked in accordance with IP 537.

Even if the verification reference fluid meets the purity specification, it may not meet the Ignition Delay requirements (see Table 2). It is recommended to either pass the suspect MCH through a filter column to remove peroxide based impurities or to test a bottle of MCH that has been shown to meet the ID requirements. It is recommended that each bottle of MCH is tested prior to its use as a verification reference fluid to confirm it is of acceptable quality.

**5.5 Quality control sample**, stable and homogeneous material(s), similar in nature to the materials under test (see 3.5)

**5.6 Combustion charge air**, of oxygen content  $20,9 \% (V/V) \pm 1,0 \% (V/V)$ , and containing less than 0,003 % (V/V) hydro-carbons and less than 0,025 % (V/V) water.

NOTE 1 Oxygen content of combustion charge compressed air can vary between batches (cylinders). Significant variation will lead to changes in ignition delay (higher oxygen content leads to a shorter ignition delay).

NOTE 2 The effects of oxygen concentration have been investigated [3].

**5.7 Actuating air**, oil-free compressed air containing less than 0,1 % (V/V) water supplied at a minimum sustained pressure of 1,5 MPa.

**5.8 Compressed nitrogen**, of minimum purity 99,9 % (V/V).

## 6 Apparatus

### 6.1 Combustion analyser

#### 6.1.1 General

The apparatus is described in more detail in Annex A. For the installation and set-up procedures, and for detailed system description, refer to the manufacturer's manual.

The system described in this standard comprises: an insulated heated, constant volume combustion chamber (see 6.1.2) with fluid cooling of designated areas; external, pneumatically actuated, chamber inlet and exhaust valves, and associated piping; a heated, pneumatically-actuated, fuel injection pump; a constant pressure fuel delivery system; a re-circulating coolant system; solenoids; sensors; controls; connection fittings for the compressed gas utilities; and a computer to control test sequencing. Figure 1 gives a schematic outline of the analyser.

**6.1.2 Combustion chamber**, steel combustion chamber of capacity  $0,213 \text{ l} \pm 0,002 \text{ l}$ , further detailed in Annex A.

**6.2 Filter medium**, with a nominal pore size  $3 \mu\text{m}$  to  $5 \mu\text{m}$ , made of glass fibre, polytetrafluorethylene (PTFE) or nylon, of a size appropriate to the apparatus being used for sample filtration (see 7.5).

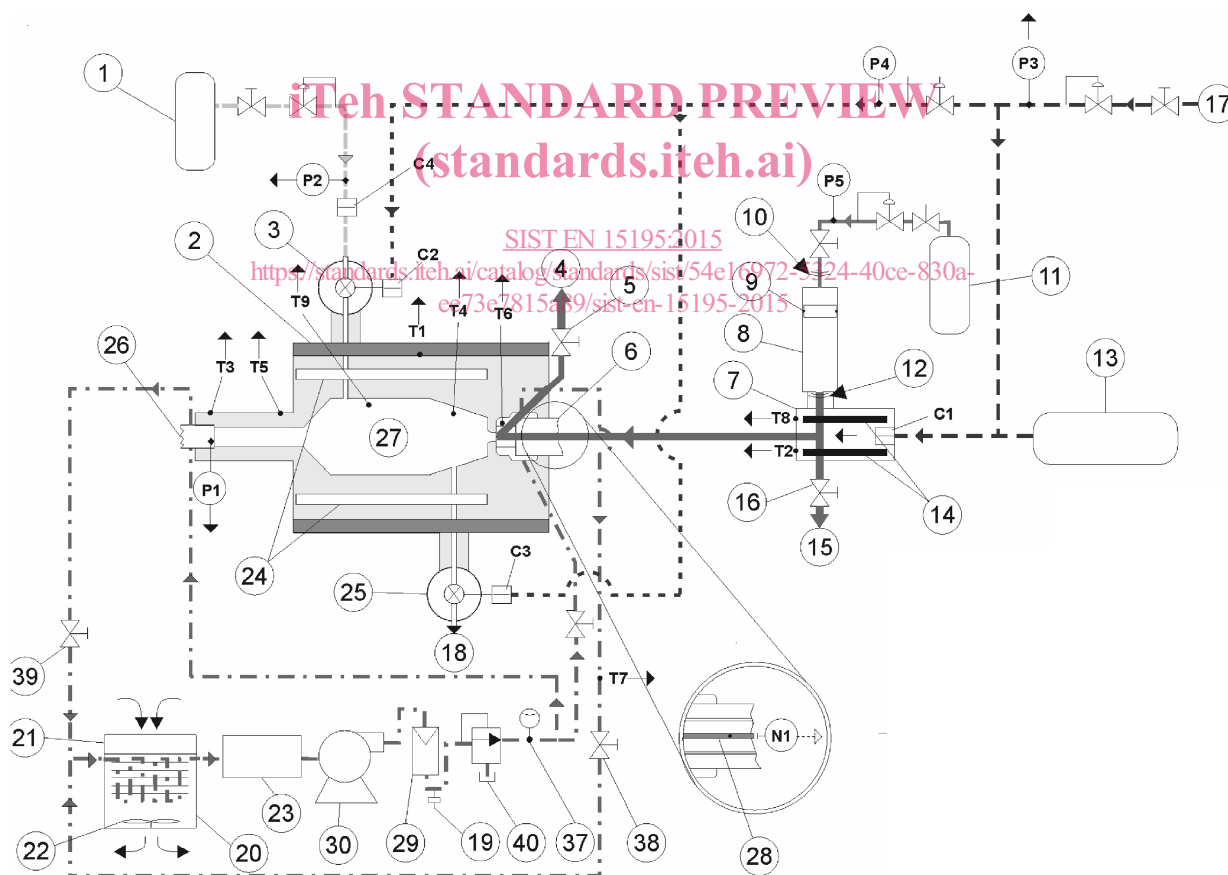


Figure 1 — Schematic overview of combustion analyser