
**Information technology — Data
interchange on 120 mm and 80 mm
optical disk using +R format — Capacity:
4,7 Gbytes and 1,46 Gbytes per side
(recording speed up to 4X)**

iTeh STANDARD PREVIEW
*Technologies de l'information — Échange de données sur disque
optique de 120 mm et 80 mm en utilisant le format +R — Capacité:
4,7 Go et 1,46 Go par face (vitesse d'enregistrement inférieure ou égale
à 4X)*
(standards.iteh.ai)

[ISO/IEC 17344:2005](https://standards.iteh.ai/catalog/standards/sist/1c16448d-b830-4e5e-a5fe-4bba444fe61e/iso-iec-17344-2005)

<https://standards.iteh.ai/catalog/standards/sist/1c16448d-b830-4e5e-a5fe-4bba444fe61e/iso-iec-17344-2005>

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 17344:2005](#)

<https://standards.iteh.ai/catalog/standards/sist/1c16448d-b830-4e5e-a5fe-4bba444fe61e/iso-iec-17344-2005>

© ISO/IEC 2005

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	viii
Section 1 — General	1
1 Scope.....	1
2 Conformance	1
2.1 Optical Disk	1
2.2 Generating system.....	1
2.3 Receiving system	2
2.4 Compatibility statement	2
3 Normative references	2
4 Terms and definitions.....	2
5 Conventions and notations.....	4
5.1 Representation of numbers	4
5.2 Names.....	4
6 List of acronyms	4
7 General description of the optical disk.....	5
8 General Requirements.....	6
8.1 Environments	6
8.1.1 Test environment	6
8.1.2 Operating environment.....	7
8.1.3 Storage environment.....	7
8.1.4 Transportation.....	7
8.2 Safety requirements.....	7
8.3 Flammability	7
9 Reference Drive.....	7
9.1 Optical system.....	7
9.2 Optical beam.....	8
9.3 Read channel 1	9
9.4 Disk clamping.....	9
9.5 Rotation of the disk.....	9
9.6 Wobble channel (Read channel 2).....	10
9.7 Tracking channel (Read channel 2).....	10
9.7.1 Normalized servo transfer function	10
9.7.2 Reference Servo for Axial Tracking	10
9.7.3 Reference Servo for Radial Tracking	11
Section 2 — Dimensional, mechanical and physical characteristics of the disk.....	13
10 Dimensional characteristics	13
10.1 Reference Planes	13
10.2 Overall dimensions	13
10.3 First transition area.....	14
10.4 Second transition area	14
10.5 Clamping Zone	14
10.6 Third transition area	14
10.7 Information Zone.....	14
10.8 Rim Area.....	15
10.9 Remark on tolerances.....	15
11 Mechanical characteristics	17

11.1	Mass.....	17
11.2	Moment of inertia.....	17
11.3	Dynamic imbalance.....	17
11.4	Axial runout.....	17
11.5	Radial runout.....	17
12	Optical characteristics in the Information Zone.....	18
12.1	Index of refraction.....	18
12.2	Thickness of the substrate.....	18
12.3	Reflectivity.....	18
12.4	Birefringence.....	18
12.5	Angular deviation.....	19
Section 3 — Format of information.....		20
13	Data format.....	20
13.1	Data Frames.....	20
13.1.1	Identification Data (ID).....	21
13.1.2	ID Error Detection Code (IED).....	21
13.1.3	RSV.....	22
13.1.4	Error Detection Code (EDC).....	22
13.2	Scrambled Frames.....	22
13.3	ECC Blocks.....	23
13.4	Recording Frames.....	24
13.5	Modulation and NRZI conversion.....	25
13.6	Physical Sectors.....	26
13.7	Layout of a Recording UNit (RUN).....	27
13.7.1	Recording Unit position.....	28
13.8	d.c. component suppression control.....	28
14	Track format.....	29
14.1	Track shape.....	29
14.2	Track path.....	29
14.3	Track pitch.....	30
14.4	Track layout.....	30
14.4.1	ADIP information.....	30
14.4.2	Physical format information in ADIP.....	35
Section 4 — Format of the Information Zone.....		46
15	General description of the Information Zone.....	46
16	Layout of the Information Zone of a Single-session disk.....	46
16.1	Physical Sector Numbers (PSNs).....	46
17	Inner Drive Area.....	47
17.1	Initial Zone.....	48
17.2	Inner Disk Test Zone.....	48
17.3	Count Zone Run-in.....	48
17.4	Inner Disk Count Zone.....	48
17.5	Inner Disk Administration Zone.....	48
17.6	Table of Contents (TOC) Zone.....	49
17.6.1	Table of Contents Blocks.....	49
17.6.2	Recorded Area Indicators.....	52
18	Lead-in Zone.....	52
18.1	Guard Zone 1.....	52
18.2	Reserved Zone 1.....	52
18.3	Reserved Zone 2.....	53
18.4	Inner Disk Identification Zone.....	53
18.5	Reserved Zone 3.....	53
18.6	Reference Code Zone.....	53
18.7	Buffer Zone 1.....	54
18.8	Control Data Zone.....	54

ITeH STANDARD PREVIEW
 (standards.iteh.ai)
 ISO/IEC 17344:2005
<https://standards.iteh.ai/catalog/standards/sist/1c16448d-b830-4e5e-a5fe-4bba444fe61e/iso-iec-17344-2005>

18.8.1	Physical format information.....	54
18.8.2	Disk manufacturing information.....	56
18.8.3	Content provider information	56
18.9	Buffer Zone 2	56
19	Data Zone	56
20	Lead-out Zone	56
20.1	Buffer Zone 3	57
20.2	Outer Disk Identification Zone	57
20.3	Guard Zone 2	57
21	Outer Drive Area.....	57
21.1	Outer Disk Administration Zone	58
21.2	Outer Disk Count Zone	58
21.3	Outer Disk Test Zone	58
21.4	Guard Zone 3	58
22	Multi-session Layout	58
22.1	Intro	59
22.1.1	Buffer Zone A	60
22.1.2	Inner Session Identification Zone	60
22.1.3	Session Control Data Zone	60
22.1.4	Buffer Zone B	60
22.2	Data Zone	60
22.3	Closure	60
22.3.1	Buffer Zone C	60
22.3.2	Outer Session Identification Zone.....	60
23	Sequential recording in Fragments.....	60
23.1	Opening a Session	60
23.1.1	Incomplete Fragment.....	61
23.1.2	Reserved Fragments.....	61
23.1.3	Recording User Data in Fragments.....	62
23.1.4	Closing a Fragment.....	62
23.2	Closing a Session	62
23.2.1	Lead-in/Intro Zone.....	63
23.2.2	Closure Zone	63
23.3	Finalizing the disk	63
24	Assignment of Logical Sector Numbers (LSNs).....	63
25	Disk Control Blocks	63
25.1	General format of Disk Control Blocks.....	63
25.2	Format of the Session DCB (SDCB).....	65
25.2.1	Session Items	67
Section 5 — Characteristics of the groove.....		69
26	General	69
27	Method of testing	69
27.1	Environment	69
27.2	Reference Drive	69
27.2.1	Optics and mechanics	69
27.2.2	Read power.....	69
27.2.3	Read channels.....	69
27.2.4	Tracking	69
27.3	Definition of signals.....	70
28	Characteristics of the groove signals.....	71
28.1	Phase depth.....	71
28.2	Push-pull signal	71
28.3	Track Cross signal	71
28.4	Normalized wobble signal.....	71

28.5	Characteristics of the wobble	71
Section 6 — Characteristics of the recording layer		72
29	Method of testing.....	72
29.1	Environment.....	72
29.2	Reference Drive	72
29.2.1	Optics and mechanics	72
29.2.2	Read power	72
29.2.3	Read channels	72
29.2.4	Tracking.....	72
29.2.5	Scanning velocity.....	73
29.3	Write conditions	73
29.3.1	Write pulse waveform	73
29.3.2	Write power.....	73
29.3.3	Write power dependency on wavelength.....	73
29.3.4	Write power window.....	74
29.4	Measurement conditions	74
30	Characteristics of the recorded signals.....	75
30.1	Channel bit length	75
30.2	Definition of signals	75
30.2.1	High frequency signals (HF).....	75
30.2.2	Modulated amplitude.....	75
30.2.3	Signal asymmetry.....	76
30.2.4	Normalized Slicing Level jump	76
30.2.5	Jitter.....	76
30.2.6	Track Cross signal	76
30.3	Read stability	76
31	Additional testing conditions.....	76
31.1	Test environment.....	77
31.1.1	Optics	77
31.2	Definition of signals	77
31.2.1	Modulated amplitude.....	77
31.2.2	Signal asymmetry.....	77
31.2.3	Jitter.....	77
31.2.4	Track Cross signal	78
31.2.5	Differential phase tracking error signal	78
31.2.6	Tangential push-pull signal.....	79
32	Quality of the recording layer	79
32.1	Defects.....	79
32.2	Data errors	79
Section 7 — Characteristics of user data		80
33	Method of testing.....	80
33.1	Environment.....	80
33.2	Reference Drive	80
33.2.1	Optics and mechanics	80
33.2.2	Read power	80
33.2.3	Read channels	80
33.2.4	Error correction	80
33.2.5	Tracking.....	81
34	Minimum quality of a Recording Unit.....	81
34.1	Tracking.....	81
34.2	User-written data	81
Annex A (normative) 80 mm +R disk		82
Annex B (normative) Measurement of light reflectivity		85
Annex C (normative) Measurement of birefringence		87

iTeh STANDARD PREVIEW
 (standards.iteh.ai)
 ISO/IEC 17344:2005
<https://standards.iteh.ai/catalog/standards/sist/1c16448d-b830-4e5e-a5fe-4bba444fe61e/iso-iec-17344-2005>

Annex D (normative) Measuring conditions for operation signals	89
Annex E (normative) Measurement of the differential phase tracking error	92
Annex F (normative) The write pulse wave form for testing	96
Annex G (normative) 8-to-16 Modulation	101
Annex H (normative) Optimum Power Control and Recording Conditions	110
Annex I (informative) Light fastness of the disk	113
Annex J (informative) Wavelength dependency	114
Annex K (informative) Running OPC	118
Annex L (informative) Transportation	119
Annex M (informative) Measurement of the groove wobble amplitude	120
Annex N (informative) How to use the Physical format information in ADIP	122
Annex O (informative) Values to be Implemented in Existing and Future Specifications	124

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/IEC 17344:2005](https://standards.iteh.ai/catalog/standards/sist/1c16448d-b830-4e5e-a5fe-4bba444fe61e/iso-iec-17344-2005)

<https://standards.iteh.ai/catalog/standards/sist/1c16448d-b830-4e5e-a5fe-4bba444fe61e/iso-iec-17344-2005>

Foreword

ISO (the International Organization for Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work. In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of the joint technical committee is to prepare International Standards. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

ISO/IEC 17344 was prepared by Ecma International (as ECMA-349) and was adopted, under a special "fast-track procedure", by Joint Technical Committee ISO/IEC JTC 1, *Information technology*, in parallel with its approval by national bodies of ISO and IEC.

(standards.iteh.ai)

[ISO/IEC 17344:2005](https://standards.iteh.ai/catalog/standards/sist/1c16448d-b830-4e5e-a5fe-4bba444fe61e/iso-iec-17344-2005)

<https://standards.iteh.ai/catalog/standards/sist/1c16448d-b830-4e5e-a5fe-4bba444fe61e/iso-iec-17344-2005>

Information technology — Data interchange on 120 mm and 80 mm optical disk using +R format — Capacity: 4,7 Gbytes and 1,46 Gbytes per side (recording speed up to 4X)

Section 1 — General

1 Scope

This International Standard specifies the mechanical, physical and optical characteristics of 120 mm recordable optical disks with capacities of 4,7 GB and 9,4 GB. It specifies the quality of the recorded and unrecorded signals, the format of the data and the recording method, thereby allowing for information interchange by means of such disks. The data can be written once and read many times using a non-reversible method. These disks are identified as +R.

The +R system also allows 80 mm disks with capacities of 1,46 GB and 2,92 GB. These disks shall have the same characteristics as the 120 mm disks, except for some parameters related to the smaller dimensions. All parameters unique for the 80 mm disks are specified in Annex A.

This International Standard specifies:

- two related but different Types of this disk (see Clause 7);
- the conditions for conformance;
- the environments in which the disk is to be tested, operated and stored;
- the mechanical, physical and dimensional characteristics of the disk, so as to provide mechanical interchange between data processing systems;
- the format of the information on the disk, including the physical disposition of the tracks and sectors, the error correcting codes and the coding method; and
- the characteristics of the signals recorded on the disk, thus enabling data processing systems to read the data from the disk.

This International Standard provides for the interchange of disks between optical disk drives. Together with a standard for volume and file structure, it provides for full data interchange between data processing systems.

2 Conformance

2.1 Optical Disk

A claim of conformance with this International Standard shall specify the Type implemented. An optical disk shall be in conformance with this International Standard if it meets all mandatory requirements specified for its Type.

2.2 Generating system

A generating system shall be in conformance with this International Standard if the optical disk it generates is in accordance with 2.1.

2.3 Receiving system

A receiving system shall be in conformance with this International Standard if it is able to handle both Types of optical disk according to 2.1.

2.4 Compatibility statement

A claim of conformance by a Generating or Receiving system with this International Standard shall include a statement listing any other standards supported. This statement shall specify the numbers of the standards, the optical disk types supported (where appropriate) and whether support includes reading only or both reading and writing.

3 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 4873:1991, *Information technology — ISO 8-bit code for information interchange — Structure and rules for implementation*

ISO/IEC 16448:2002, *Information technology — 120 mm DVD — Read-only disk*

ISO/IEC 16449:2002, *Information technology — 80 mm DVD — Read-only disk*

ISO/IEC 17341:2004, *Information technology — Data interchange on 120 mm and 80 mm optical disk using +RW format — Capacity: 4,7 Gbytes and 1,46 Gbytes per side*

ECMA-287, *Safety of electronic equipment (1999)*

[ISO/IEC 17344:2005](https://standards.iteh.ai/catalog/standards/sist/1c16448d-b830-4e5e-a5fe-4bba444fe61e/iso-iec-17344-2005)

<https://standards.iteh.ai/catalog/standards/sist/1c16448d-b830-4e5e-a5fe-4bba444fe61e/iso-iec-17344-2005>

4 Terms and definitions

For the purposes of this document, the following terms and definitions apply:

4.1

Channel bit

The elements by which the binary values ZERO and ONE are represented by marks and spaces on the disk.

4.2

Clamping Zone

The annular part of the disk within which the clamping force is applied by the clamping device.

4.3

Digital Sum Value (DSV)

The arithmetic sum obtained from a bit stream by allocating the decimal value +1 to bits set to ONE and the decimal value -1 to bits set to ZERO.

4.4

Disk Reference Plane

A plane defined by the perfectly flat annular surface of an ideal spindle onto which the Clamping Zone of the disk is clamped, and which is normal to the axis of rotation.

4.5

dummy substrate

A layer which may be transparent or not, provided for the mechanical support of the disk and, in some cases, of the recording layer as well.

4.6**entrance surface**

The surface of the disk onto which the optical beam first impinges.

4.7**field**

A subdivision of a sector.

4.8**groove**

A trench-like feature of the disk, applied before the recording of any information, and used to define the track location. The groove is located nearer to the entrance surface than the so-called land in between the grooves. The recording is made on the groove.

4.9**interleaving**

The process of reallocating the physical sequence of units of data so as to render the data more immune to burst errors.

4.10**mark**

A feature of the recording layer which may take the form of an amorphous domain, a pit, or any other type or form that can be sensed by the optical system. The pattern of marks and spaces represents the data on the disk.

4.11**multi-session disk**

A disk containing more than one set of Lead-in/Intro, Data, and Lead-out/Closure Zones.

4.12**Physical Sector**

The smallest addressable part of a track in the Information Zone of a disk that can be accessed independently of other addressable parts of the Zone.

4.13**recording layer**

A layer of the disk on which data is written during manufacture and/or use.

4.14**Reed-Solomon code (RS)**

An error detection and/or correction code.

4.15**Single-session disk**

A disk containing a Lead-in Zone, one Data Zone, and a Lead-out Zone.

4.16**session**

A continuous part of the Information Zone of the disk consisting of a Lead-in or Intro Zone, a Data Zone and a Lead-out or Closure Zone.

4.17**space**

A feature of the recording layer represented by any area between two marks which can be sensed by the optical system. The pattern of marks and spaces represents the data on the disk.

4.18

substrate

A transparent layer of the disk, provided for mechanical support of the recording layer, through which the optical beam accesses the recording layer.

4.19

track

A 360° turn of a continuous spiral.

4.20

track pitch

The distance between adjacent track centrelines, measured in a radial direction.

4.21

wobble

A continuous sinusoidal deviation of the track from the average centreline. Location information is included as phase modulated data in the wobble.

4.22

zone

An annular area of the disk.

5 Conventions and notations

5.1 Representation of numbers

iTeh STANDARD PREVIEW
(standards.iteh.ai)

A measured value is rounded off to the least significant digit of the corresponding specified value. For instance, it implies that a specified value of 1,26 with a positive tolerance of +0,01 and a negative tolerance of -0,02 allows a range of measured values from 1,235 to 1,274.

Numbers in decimal notations are represented by the digits 0 to 9.

Numbers in hexadecimal notation are represented by the hexadecimal digits 0 to 9 and A to F in parentheses.

The setting of bits is denoted by ZERO and ONE.

Numbers in binary notations and bit patterns are represented by strings of digits 0 and 1, with the most significant bit shown to the left. In a pattern of n bits, bit $b_{(n-1)}$ shall be the most significant bit (msb) and bit b_0 shall be the least significant bit (lsb). Bit $b_{(n-1)}$ shall be recorded first.

Negative values of numbers in binary notation are given as Two's complement.

In each data field, the data is recorded so that the most significant byte (MSB), identified as Byte 0, shall be recorded first and the least significant byte (LSB) last.

In a field of $8n$ bits, bit $b_{(8n-1)}$ shall be the most significant bit (msb) and bit b_0 the least significant bit (lsb). Bit $b_{(8n-1)}$ shall be recorded first.

5.2 Names

The names of entities, e.g. specific tracks, fields, etc., are given with an initial capital.

6 List of acronyms

a.c.	alternating current
ADIP	Address in Pre-groove
ASM	Asymmetry
BP	Byte Position
BPF	Band Pass Filter

CAV	Constant Angular Velocity
CLD	Constant Linear Density
CLV	Constant Linear Velocity
cm	current mark
d.c.	direct current
DCB	Disk Control Block
DCC	d.c. Component suppression Control
DSV	Digital Sum Value
ECC	Error Correction Code
EDC	Error Detection Code
EI	Extended Information
HF	High Frequency
ID	Identification Data
IED	ID Error Detection code
LPF	Low Pass filter
LSN	Logical Sector Number
lsb	Least Significant Bit
LSB	Least Significant Byte
msb	Most Significant Bit
MSB	Most Significant Byte
NA	Numerical Aperture
NRZ	Non Return to Zero
NRZI	Non Return to Zero Inverted
NSL	Normalized Slicing Level
NWPW	Normalized Write Power Window
OPC	Optimum Power Control
PAA	Physical Address in ADIP
PBS	Polarizing Beam Splitter
PI	Parity of Inner-code
PLL	Phase Locked Loop
PP	Push-Pull
pp	peak-to-peak
ps	previous space
PSN	Physical Sector Number
PO	Parity of Outer-code
RIN	Relative Intensity Noise
RS	Reed-Solomon code
RSV	Reserved (in use by specific applications)
RUN	Recording UNit
SDCB	Session DCB
SNR	Signal to Noise Ratio
SYNC	Synchronization code
TOC	Table of Contents

7 General description of the optical disk

The optical disk that is the subject of this International Standard consists of two substrates bonded together by an adhesive layer, so that the recording layer(s) is (are) on the inside. The centring of the disk is performed on the edge of the centre hole of the assembled disk on the side currently accessed. Clamping is performed in the Clamping Zone. This International Standard provides for two Types of such disks.

Type S consists of a substrate, a single recording layer and a dummy substrate. The recording layer can be accessed from one side only. The capacity is 4,7 GB for the 120 mm sized disk and 1,46 GB for the 80 mm sized disk.

Type D consists of two substrates and two recording layers. From each side of the disk only one of the recording layers can be accessed. The capacity is 9,4 GB for the 120 mm sized disk and 2,92 GB for the 80 mm sized disk.

Data can be written onto the disk as marks in the form of low-reflective spots in the recording layer with a focused optical beam. The data can be read with a focused optical beam, using the difference in the reflectivity between recorded marks and unrecorded spaces. The beam accesses the recording layer through a transparent substrate of the disk.

Figure 1 shows schematically the two Types.

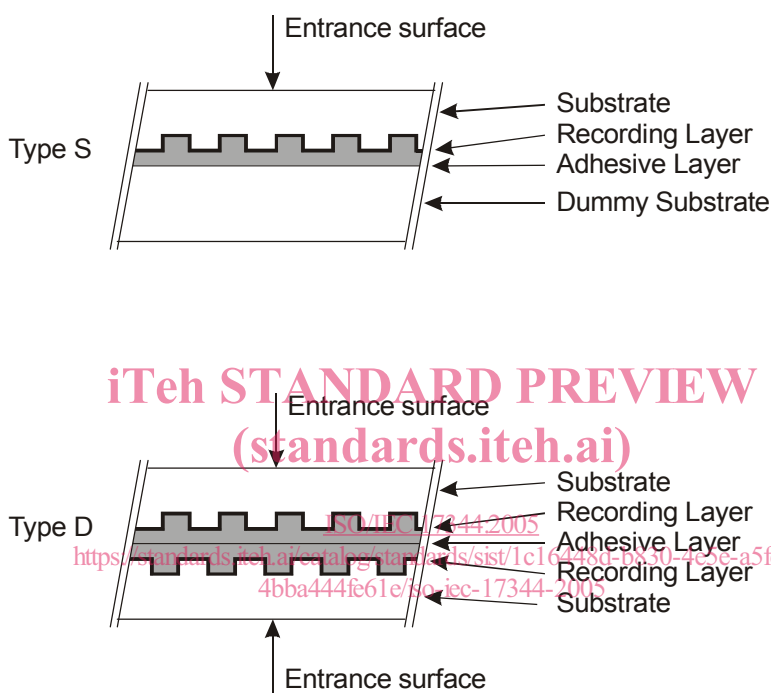


Figure 1 — Types of +R disk

8 General Requirements

8.1 Environments

8.1.1 Test environment

In the test environment, the air immediately surrounding the disk shall have the following properties:

temperature	: 23 °C ± 2 °C
relative humidity	: 45 % to 55 %
atmospheric pressure	: 60 kPa to 106 kPa

No condensation on the disk shall occur. Before testing, the disk shall be conditioned in this environment for 48 h minimum. It is recommended that, before testing, the entrance surface of the disk shall be cleaned according to the instructions of the manufacturer of the disk.

Unless otherwise stated, all tests and measurements shall be made in this test environment.

8.1.2 Operating environment

This International Standard requires that a disk which meets all requirements of this International Standard in the specified test environment shall provide data interchange over the specified ranges of environmental parameters in the operating environment.

The operating environment is the environment where the air immediately surrounding the disk shall have the following properties:

temperature	: 5 °C to 55 °C
relative humidity	: 3 % to 85 %
absolute humidity	: 1 g/m ³ to 30 g/m ³
atmospheric pressure	: 60 kPa to 106 kPa
temperature gradient	: 10 °C/h max.
relative humidity gradient	: 10 %/h max.

No condensation on the disk shall occur. If the disk has been exposed to conditions outside those specified in this Clause, it shall be acclimatized in an allowed operating environment for at least 2 h before use.

8.1.3 Storage environment

The storage environment is defined as the environment where the air immediately surrounding the disk shall have the following properties:

temperature	: -10 °C to 55 °C
relative humidity	: 3 % to 90 %
absolute humidity	: 1 g/m ³ to 30 g/m ³
atmospheric pressure	: 60 kPa to 106 kPa
temperature gradient	: 15 °C/h max.
relative humidity gradient	: 10 %/h max.

No condensation on the disk shall occur.

[ISO/IEC 17344:2005](https://standards.iteh.ai/catalog/standards/sist/1c16448d-b830-4e5e-a5fe-4bba444fe61e/iso-iec-17344-2005)

8.1.4 Transportation

This International Standard does not specify requirements for transportation; guidance is given in Annex L.

8.2 Safety requirements

The disk shall satisfy the safety requirements of Standard ECMA-287, when used in the intended manner or in any foreseeable use in an information processing system.

8.3 Flammability

The disk and its components shall be made from materials that comply with the flammability class for HB materials, or better, as specified in Standard ECMA-287.

9 Reference Drive

The Reference Drive shall be used for the measurement of optical parameters for conformance with the requirements of this International Standard. The critical components of this device have the characteristics specified in this Clause.

9.1 Optical system

The basic set-up of the optical system of the Reference Drive used for measuring the write and read parameters is shown in Figure 2. Different components and locations of components are permitted, provided that the performance remains the same as that of the set-up in Figure 2. The optical system shall be such that the detected light reflected from the entrance surface of the disk is minimized so as not to influence the accuracy of the measurements.