



SLOVENSKI STANDARD
SIST ISO 3547-5:2008

01-julij-2008

BUXca Yý U
SIST ISO 12307-1:2002

Drсни ležaji - Zvite puše - 5. del: Merjenje zunanjega premera

Plain bearings - Wrapped bushes - Part 5: Checking the outside diameter

Gleitlager - Gerollte Buchsen - Teil 5: Prüfung des Außendurchmessers

Paliers lisses - Bagues roulées - Partie 5: Contrôle du diamètre extérieur
iTeh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: ISO 3547-5:2007

<https://standards.iteh.ai/catalog/standards/sist/9d92677b-41ca-41f3-aa9c-d6ad5643b9e1/sist-iso-3547-5-2008>

ICS:

21.100.10 Drsni ležaji Plain bearings

SIST ISO 3547-5:2008 **en**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 3547-5:2008

<https://standards.iteh.ai/catalog/standards/sist/9d92677b-41ca-41f3-aa9c-d6ad5643b9e1/sist-iso-3547-5-2008>

**Plain bearings — Wrapped bushes —
Part 5:
Checking the outside diameter**

Paliers lisses — Bagues roulées —

Partie 5: Contrôle du diamètre extérieur

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ISO 3547-5:2008](https://standards.iteh.ai/catalog/standards/sist/9d92677b-41ca-41f3-aa9c-d6ad5643b9e1/sist-iso-3547-5-2008)

<https://standards.iteh.ai/catalog/standards/sist/9d92677b-41ca-41f3-aa9c-d6ad5643b9e1/sist-iso-3547-5-2008>



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST ISO 3547-5:2008

<https://standards.iteh.ai/catalog/standards/sist/9d92677b-41ca-41f3-aa9c-d6ad5643b9e1/sist-iso-3547-5-2008>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword.....	iv
1 Scope	1
2 Normative references	1
3 Symbols and units	2
4 Outside diameter, D_o	2
5 Purpose of checking.....	3
6 Methods of checking	3
7 Selection of checking method for outside diameter	3
8 ISO 3547-2, test A — Outside diameter, D_o	3
9 ISO 3547-2:2006, test B — Outside diameter, D_o.....	11
10 ISO 3547-2:2006, test D — Outside diameter, $D_o > 120$ mm.....	13
11 Specifications on drawings of bushes	14
12 Specifications for control of the checking equipment.....	14
Bibliography	15

SIST ISO 3547-5:2008

<https://standards.iteh.ai/catalog/standards/sist/9d92677b-41ca-41f3-aa9c-d6ad5643b9e1/sist-iso-3547-5-2008>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted according to the rules given in the ISO/IEC Directives, Part 2.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 3547-5 was prepared by Technical Committee ISO/TC 123, *Plain bearings, Subcommittee SC 5, Quality analysis and assurance*.

This part of ISO 3547 cancels and replaces ISO 12307-1:1994, which has been technically revised.

ISO 3547 consists of the following parts, under the general title *Plain bearings — Wrapped bushes*:

- *Part 1: Dimensions* [SIST ISO 3547-5:2008
https://standards.iteh.ai/catalog/standards/sist/9d92677b-41ca-41f3-aa9c-d6ad5643b9e1/sist-iso-3547-5-2008](https://standards.iteh.ai/catalog/standards/sist/9d92677b-41ca-41f3-aa9c-d6ad5643b9e1/sist-iso-3547-5-2008)
- *Part 2: Test data for outside and inside diameters*
- *Part 3: Lubrication holes, grooves and indentations*
- *Part 4: Materials*
- *Part 5: Checking the outside diameter*
- *Part 6: Checking the inside diameter*
- *Part 7: Measurement of wall thickness of thin-walled bushes*

Plain bearings — Wrapped bushes —

Part 5: Checking the outside diameter

1 Scope

This part of ISO 3547 specifies, following ISO 12301, the checking of the outside diameter of wrapped bushes (ISO 3547-2:2006, methods A, B and D) and describes the necessary checking methods and measuring equipment.

Wrapped bushes in the free condition are flexible, but after insertion they adapt largely to the shape of the housing bore due to the oversize between the outside diameter of the bush and the housing bore. For this reason, checking of the outside diameter of wrapped bushes can only be carried out under a constraining load by use of specialized measuring equipment.

NOTE 1 The dimensions and tolerances of wrapped bushes are given in ISO 3547-1. Checking the wall thickness is the subject of ISO 3547-7.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

2 Normative references

SIST ISO 3547-5:2008

<https://standards.iteh.ai/catalog/standards/sist/9d92677b-41ca-41f3-aa9c-d6ad5643b9e1/sist-iso-3547-5-2008>

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 286-2:1988, *ISO system of limits and fits — Part 2: Tables of standard tolerance grades and limit deviations for holes and shafts*

ISO/R 1938-1:1971, *ISO system of limits and fits — Part 1: Inspection of plain workpieces*

ISO 3547-2:2006, *Plain bearings — Wrapped bushes — Part 2: Test data for outside and inside diameters*


3 Symbols and units

Table 1 — Symbols and units

Symbol	Parameter	SI unit
B	Width of the bush	millimetres
$b_{ch, 1}$	Width of the checking block	millimetres
$b_{ch, 2}$	Width of the setting plug	millimetres
d_o	Outside diameter of the ring gauge	millimetres
D_o	Outside diameter of the bush	millimetres
$d_{ch, 1}$	Diameter of the checking block bore (see ISO 3547-2)	millimetres
$d_{ch, 2}$	Diameter of the setting plug (see ISO 3547-2)	millimetres
$d_{ch, a, 1}$	Actual diameter of the checking block	millimetres
$d_{ch, a, 2}$	Actual diameter of the setting plug	millimetres
F_{ch}	Checking load	newtons
C	Correction factor	millimetres
n	Number of test pieces	—
R_a	Surface roughness	micrometres
$t_1 \dots t_6$	Tolerances of form and position	millimetres
x	Length of checking block	millimetres
y	Width of checking block	millimetres
z	Distance between checking block halves	millimetres
ΔD_o	Tolerance of D_o	millimetres
Δz	Indicator reading	millimetres
Δz_D	Circumference indicator reading	millimetres

4 Outside diameter, D_o

For the outside diameter of a wrapped bush, see Figure 1.



Key

1 split line

NOTE The free diameter of a wrapped bush is not measured directly because of the flexible nature of the component.

Figure 1 — Outside diameter of a wrapped bush

5 Purpose of checking

The outside diameter shall be checked to ensure the designated mounting compression (interference fit) for the wrapped bush in the housing bore.

6 Methods of checking

NOTE Checking method C is for measuring the inside diameter and is covered by ISO 3547-6.

6.1 Checking method A — Measurement of outside diameter, D_o

NOTE See ISO 3547-2.

Check the outside diameter of a wrapped bush using measuring equipment as shown in Figure 2, with a checking block consisting of upper and lower halves (see Figures 3 and 4) and setting plugs (see Figures 5 and 6), at a determined checking load, F_{ch} .

Measure the outside diameter indirectly as the difference in the value of z , Δz .

The checking load is calculated so that the bush outside diameter is reduced only elastically during checking and that there is no permanent deformation.

6.2 Checking method B — Gauging of outside diameter, D_o

NOTE See ISO 3547-2.

Check the outside diameter of a wrapped bush in “GO” and “NO GO” ring gauges.

6.3 Checking method D — Measurement of outside diameter, $D_o > 120$ mm

NOTE See ISO 3547-2.

Check the outside diameter of a wrapped bush above 120 mm diameter using a precision measuring tape.

7 Selection of checking method for outside diameter

Method A is a precise method involving complex tooling. Method B is an attributive method using simpler tooling. Method D is used only for wrapped bushes with an outside diameter > 120 mm. All three methods are in general use. Method A is generally unsuitable for small bushes up to 10 mm outside diameter but is preferred for bushes over 10 mm outside diameter.

8 ISO 3547-2, test A — Outside diameter, D_o


8.1 Measuring equipment

See Tables 2 and 3.

Typical equipment for measuring the bush consists essentially of the following components:

- base plate used as fixture and guiding device for the split checking block;
- means to generate the checking load;
- means to calibrate the load;

- upper plate;
- system for transmitting the distance, z , of both checking block halves to the measuring pin (see Figure 2);
- measuring pin with indicating instrument;
- checking block (see Figures 3 and 4) with setting plug (see Figures 5 and 6).

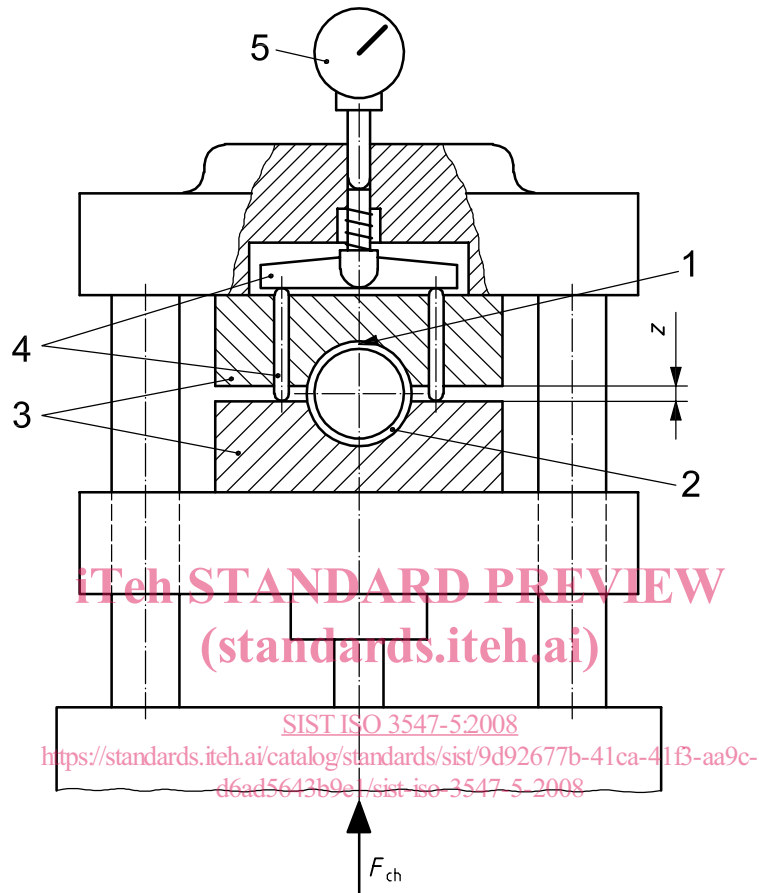

- Key**
- 1 split line
 - 2 bush
 - 3 checking block
 - 4 measuring pins
 - 5 indicating instrument

Figure 2 — Typical outside diameter measuring system

Figure 2 shows a typical outside diameter measuring system. This may be operated hydraulically, pneumatically or mechanically.

The force, F_{ch} , may be smoothly applied from the top or from below.

The bush split shall be in the vertical direction and pointing towards the upper checking block.

Table 2 — Checking loads, limiting deviations, speed of approach and temperature

Checking load F_{ch} N		Permissible limiting deviations %	Maximum speed of approach to apply the checking load, F_{ch} mm/s	Test temperature ^a °C
—	≤ 2 000	± 1,25	12	20 to 25
> 2 000	≤ 5 000	± 1		
> 5 000	≤ 10 000	± 0,75		
> 10 000	≤ 50 000	± 0,5		

^a The difference in temperature between the checking block and the bush to be measured shall not exceed 1 °C.

Table 3 — Deviations for dial gauge and electronic gauge

Dimensions in millimetres

Outside diameter Tolerance ΔD_o		Resolution		Total deviation ^a	
		dial gauge	electronic gauge	dial gauge	electronic gauge
—	≤ 0,1	0,001	0,001	0,001 2	0,5 % of measuring range
> 0,1		0,005	0,005	0,006	

^a Maximum measuring value indication (for a full-scale range of ± 500 µm).

SIST ISO 3547-5:2008

8.2 Requirements for checking the block and the setting plug

The requirements for the checking block and the setting plug for measuring the bush outside diameter, D_o , shall be as shown in Figures 3 to 6 and as given in Table 4. Manufacturing tolerances and wear limits are given in Table 5.

Table 4 — Maximum difference between the diameters of the checking block, $d_{ch, 1}$, and setting plug, $d_{ch, 2}$, for a usable combination

Dimensions in millimetres

D_o nominal		$d_{ch, 1} - d_{ch, 2}$ max.
	≤ 18	0,006
> 18	≤ 50	0,008
> 50	≤ 80	0,01
> 80	≤ 120	0,012
> 120	≤ 180	0,016