

ETSI TR 103 100 V2.1.1 (2019-03)



Operation of RFID in the UHF Band; Proposed improvements to be incorporated into future versions of ETSI EN 302 208

Standard Preview
Full standard/catalog/standards/etsi-tr-103-100-v2.1.1-2019-03
<https://standards.iteh.ai/catalog/standards/etsi-tr-103-100-v2.1.1-2019-03>

Reference

RTR/ERM-TG34-266

Keywords

radio, RFID, SRD

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:
<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:
<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2019.
All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M™ logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	4
Foreword.....	4
Modal verbs terminology.....	4
1 Scope	5
2 References	5
2.1 Normative references	5
2.2 Informative references.....	5
3 Definition of terms, symbols and abbreviations.....	5
3.1 Terms.....	5
3.2 Symbols.....	5
3.3 Abbreviations	5
4 Planned improvements to ETSI EN 302 208	6
4.1 Update of scope.....	6
4.2 Update of informative references clause	6
4.2.1 Add reference.....	6
4.2.2 Remove unnecessary references	6
4.3 Update of measurement uncertainties.....	6
4.4 Add missing trace mode	6
4.5 Testing of tags with metal backplanes.....	7
4.6 Align with ITU definitions	7
4.7 Align with EC decision	8
History	9

ITEH STANDARD PREVIEW
 (standards.iteh.ai)
 Full standard:
<https://standards.iteh.ai/catalog/standards/sist/d482651e-ack-4232-bad5-f8d6806172f5/etsi-tr-103-100-v2.1.1-2019-03>

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Technical Report (TR) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

Modal verbs terminology

In the present document "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document has been produced to provide details of proposed improvements that will be incorporated into future versions of ETSI EN 302 208 [i.1]. It is believed that this information will provide helpful guidance to test houses and other similar bodies on interpretation of the clauses in version 3.1.1 of ETSI EN 302 208 [i.1].

2 References

2.1 Normative references

Normative references are not applicable in the present document.

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long-term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI EN 302 208 (V3.1.1): "Radio Frequency Identification Equipment operating in the band 865 MHz to 868 MHz with power levels up to 2 W and in the band 915 MHz to 921 MHz with power levels up to 4 W; Harmonised Standard covering the essential requirements of article 3.2 of the Directive 2014/53/EU".
 - [i.2] EC RSCOM17-60rev3 – Radio Spectrum Committee Working Document: "Opinion of the RSC pursuant to the Examination Procedure under Article 5 of Regulation 182/2011/EU and Article 4.3 or Radio Spectrum Decision 676/2002/EC".
 - [i.3] CEPT ERC/REC 70-03: "Relating to the use of Short Range Devices (SRD)".
-

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in ETSI EN 302 208 [i.1] apply.

3.2 Symbols

For the purposes of the present document, the symbols given in ETSI EN 302 208 [i.1] apply.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in ETSI EN 302 208 [i.1] apply.

4 Planned improvements to ETSI EN 302 208

4.1 Update of scope

In clause 1 "Scope" change the following text:

"The frequency usage conditions for RFIDs in the band 865 MHz to 868 MHz are EU wide harmonised according to 2006/804/EC [i.12]."

To the new text:

"The frequency usage conditions for RFID in the band 865 MHz to 868 MHz are EU wide harmonised according to 2006/804/EC [i.12] and the amendment 2017/1483 [i.13]."

4.2 Update of informative references clause

4.2.1 Add reference

In clause 2.2 "Informative references" add the following reference:

- [i.13] Commission implementing Decision (EU) 2017/1483 of 8 August 2017 amending Decision 2006/771/EC on harmonisation of the radio spectrum for use by short-range devices and repealing Decision 2006/804/EC.

4.2.2 Remove unnecessary references

Remove the following references as it is covered by table 4.

[i.5], [i.6] measurement uncertainty.

4.3 Update of measurement uncertainties

Replace table 4 in ETSI EN 302 208 [i.1] with table 1 according the input to the future update of ETSI EN 302 208.

Table 1: Measurement uncertainty

Radio frequency	$\pm 1 \times 10^{-7}$
RF power, conducted	$\pm 1,5$ dB
Conducted spurious emission of transmitter, valid up to 6 GHz	± 3 dB
Conducted emission of receivers	± 3 dB
Radiated emission of transmitter, valid up to 6 GHz	± 6 dB
Radiated emission of receiver, valid up to 6 GHz	± 6 dB
RF level uncertainty for a given BER	$\pm 1,5$ dB
Two-signal measurements	± 4 dB
Time	± 5 %
Temperature	± 1 °C
Humidity	± 10 %

4.4 Add missing trace mode

The trace mode is missing in clauses 5.7.1.2 und 5.7.1.3. Change the following text in both clauses 5.7.1.2 and 5.7.1.3:

f) Detection mode: Average."

To the new text:

e) Trace mode: Max. hold sufficient to capture all emissions.

f) Detection mode: Average."

4.5 Testing of tags with metal backplanes

The method of test in ETSI EN 302 208 [i.1] should be amended to permit emissions from tags fitted with metal backplanes to be measured. The configuration should be changed from that shown in figure 16 in ETSI EN 302 208 [i.1] to that specified in the diagram in figure 1 with an interrogator angle of 0° to 60° between the tag-interrogator to tag-receiver line, whereas the receiver antenna should be placed in the direction of maximum gain of the tag.

Metal backplanes used for testing should be at least 40 cm in diameter, whereas any edge should be at least 20 cm away from the tag.

NOTE: 40 cm has been selected as it is greater than the longest wavelength of the frequencies from 865 MHz to 921 MHz.

Changes should be added to the appropriate clause in ETSI EN 302 208 [i.1].

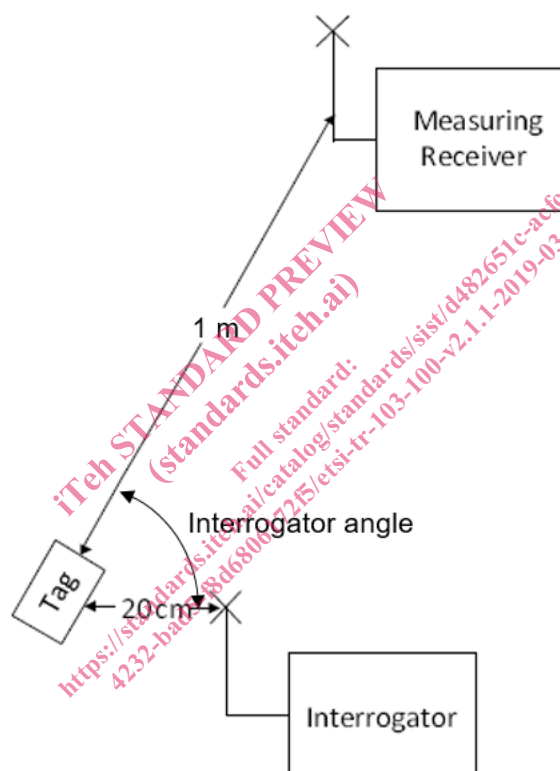


Figure 1: Measurement of tag emissions

The remainder of the test method remains unchanged.

4.6 Align with ITU definitions

Change as follows:

Clause 4.3.6.3 *Limits* of ETSI EN 302 208 [i.1] CURRENT:

"The level of any spurious emission, conducted or radiated, outside the relevant necessary bands shall not exceed the values given in table 2."

Clause 4.3.6.3 *Limits* of a future revision of ETSI EN 302 208 NEW:

"The level of any spurious emission, conducted or radiated, outside the frequency ranges covered in clause 4.3.5.3 shall not exceed the values given in table 2."

4.7 Align with EC decision

The next version of ETSI EN 302 208 should be aligned with EC document RSCOM17-60rev3 [i.2] in accordance with the planned respective EC decision.

Furthermore, it should address the related updates of CEPT ERC/REC 70-03 [i.3] as well.

ITeH STANDARD PREVIEW
(standards.iteh.ai)

Full standard:
<https://standards.iteh.ai/catalog/standards/sist/d482651c-acfc-4232-bad5-f8d6806172f5/etsi-tr-103-100-v2.1.1-2019-03>