# INTERNATIONAL ISO/IEEE STANDARD 11073-10415

First edition 2010-05-01

# Health informatics — Personal health device communication —

Part 10415: **Device specialization — Weighing scale** 

Informatique de santé — Communication entre dispositifs de santé **iTeh ST**personnels **RD PREVIEW** Partie 10415: Spécialisation des dispositifs — Plateau de balance (standards.tten.al)

ISO/IEEE 11073-10415:2010 https://standards.iteh.ai/catalog/standards/sist/c850e95f-7923-4ee5-8682a5d272662942/iso-ieee-11073-10415-2010



Reference number ISO/IEEE 11073-10415:2010(E)

#### PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. Neither the ISO Central Secretariat nor IEEE accepts any liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies and IEEE members. In the unlikely event that a problem relating to it is found, please inform the ISO Central Secretariat or IEEE at the address given below.

# iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>ISO/IEEE 11073-10415:2010</u> https://standards.iteh.ai/catalog/standards/sist/c850e95f-7923-4ee5-8682a5d272662942/iso-ieee-11073-10415-2010



### COPYRIGHT PROTECTED DOCUMENT

#### © ISO 2010 © IEEE 2010

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO or IEEE at the respective address below.

ISO copyright office Case postale 56 • CH-1211 Geneva 20 Tel. + 41 22 749 01 11 Fax + 41 22 749 09 47 E-mail copyright@iso.org Web www.iso.org Published in Switzerland Institute of Electrical and Electronics Engineers, Inc. 3 Park Avenue, New York • NY 10016-5997, USA E-mail stds.ipr@ieee.org Web www.ieee.org

## Contents

#### Page

Foreword	. v
Introduction	vii
1. Overview	1
1. Overview	. 1
1.1 Scope	
1.2 Purpose 1.3 Context	
2. Normative references	2
3. Definitions, acronyms, and abbreviations	2
3.1 Definitions	2
3.2 Acronyms and abbreviations	
4. Introduction to ISO/IEEE 11073 personal health devices the hard	
<ul> <li>4.1 General</li> <li>4.2 Introduction to IEEE 11073-2060 modeling constructs 2010 https://standards.iteh.ai/catalog/standards/sist/c850e95f-7923-4ee5-8682-</li> </ul>	4
5. Weighing scale device concepts and modalifies -ieee -11073 - 10415 - 2010	1
5.1 General	
5.2 Body weight	
5.4 Body mass index	
6. Weighing scale domain information model	. 5
6.1 Overview	. 5
6.2 Class extensions	5
6.3 Object instance diagram	
<ul><li>6.4 Types of configuration</li><li>6.5 Medical device system object</li></ul>	
6.6 Numeric objects	11
6.7 Real-time sample array objects	
6.8 Enumeration objects 6.9 PM-store objects	
6.10 Scanner objects	
6.11 Class extension objects	
6.12 Weighing scale information model extensibility rules	
7. Weighing scale service model	15
7.1 General	15
7.2 Object access services	15
7.3 Object access event report services	17

8. Weighing scale communication model	17
8.1 Overview	
8.2 Communications characteristics	
8.3 Association procedure	
8.4 Configuring procedure	19
8.5 Operating procedure	
8.6 Time synchronization	
9. Test associations	21
9.1 Behavior with standard configuration	
9.2 Behavior with extended configurations	
10. Conformance	
10.1 Applicability	
10.2 Conformance specification	
10.3 Levels of conformance	
10.4 Implementation conformance statements	23
Annex A (informative) Bibliography	
Annex B (normative) Any additional ASN 1 definitions	
Annex C (normative) Allocation of identifiers arcs.iteh.ai)	
Annex D (informative) Message sequence(examples)073-10415:2010	
https://standards.iteh.ai/catalog/standards/sist/c850e95f-7923-4ee5-8682-	
Annex E (informative) Protocol data unit examples ieee-11073-10415-2010	

### Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

IEEE Standards documents are developed within the IEEE Societies and the Standards Coordinating Committees of the IEEE Standards Association (IEEE-SA) Standards Board. The IEEE develops its standards through a consensus development process, approved by the American National Standards Institute, which brings together volunteers representing varied viewpoints and interests to achieve the final product. Volunteers are not necessarily members of the Institute and serve without compensation. While the IEEE administers the process and establishes rules to promote fairness in the consensus development process, the IEEE does not independently evaluate, test, or verify the accuracy of any of the information contained in its standards.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

#### <u>ISO/IEEE 11073-10415:2010</u>

Attention is called to the possibility that implementation of this standard may require the use of subject matter covered by patent rights. By publication of this standard, no position is taken with respect to the existence or validity of any patent rights in connection therewith. ISO/IEEE is not responsible for identifying essential patents or patent claims for which a license may be required, for conducting inquiries into the legal validity or scope of patents or patent claims or determining whether any licensing terms or conditions provided in connection with submission of a Letter of Assurance or a Patent Statement and Licensing Declaration Form, if any, or in any licensing agreements are reasonable or non-discriminatory. Users of this standard are expressly advised that determination of the validity of any patent rights, and the risk of infringement of such rights, is entirely their own responsibility. Further information may be obtained from ISO or the IEEE Standards Association.

ISO/IEEE 11073-10415 was prepared by the 11073 Committee of the Engineering in Medicine and Biology Society of the IEEE (as IEEE Std 11073-10415-2008). It was adopted by Technical Committee ISO/TC 215, *Health informatics*, in parallel with its approval by the ISO member bodies, under the "fast-track procedure" defined in the Partner Standards Development Organization cooperation agreement between ISO and IEEE. Both parties are responsible for the maintenance of this document.

ISO/IEEE 11073 consists of the following parts, under the general title *Health informatics* — *Personal health device communication (text in parentheses gives a variant of subtitle)*:

- Part 10101: (Point-of-care medical device communication) Nomenclature
- Part 10201: Domain information model
- Part 10404: Device specialization Pulse oximeter

- Part 10407: Device specialization Blood pressure monitor
- Part 10408: (Point-of-care medical device communication) Device specialization Thermometer
- Part 10415: (Point-of-care medical device communication) Device specialization Weighing scale
- Part 10417: Device specialization Glucose meter
- Part 10471: (Point-of-care medical device communication) Device specialization Independent living activity hub
- Part 20101: (Point-of-care medical device communication) Application profiles Base standard
- Part 20601: (Point-of-care medical device communication) Application profile Optimized exchange protocol
- Part 30200: (Point-of-care medical device communication) Transport profile Cable connected
- Part 30300: (Point-of-care medical device communication) Transport profile Infrared wireless

## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO/IEEE 11073-10415:2010 https://standards.iteh.ai/catalog/standards/sist/c850e95f-7923-4ee5-8682a5d272662942/iso-ieee-11073-10415-2010

### Introduction

ISO/IEEE 11073 standards enable communication between medical devices and external computer systems. This document uses the optimized framework created in IEEE Std 11073-20601<sup>a</sup> and describes a specific, interoperable communication approach for weighing scales. These standards align with, and draw upon, the existing clinically focused standards to provide support for communication of data from clinical or personal health devices.

# iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>ISO/IEEE 11073-10415:2010</u> https://standards.iteh.ai/catalog/standards/sist/c850e95f-7923-4ee5-8682a5d272662942/iso-ieee-11073-10415-2010

<sup>&</sup>lt;sup>a</sup> For information on references, see Clause 2.

# iTeh STANDARD PREVIEW (standards.iteh.ai)

<u>ISO/IEEE 11073-10415:2010</u> https://standards.iteh.ai/catalog/standards/sist/c850e95f-7923-4ee5-8682a5d272662942/iso-ieee-11073-10415-2010

# Health informatics — Personal health device communication —

# Part 10415: **Device specialization — Weighing scale**

IMPORTANT NOTICE: This standard is not intended to assure safety, security, health, or environmental protection in all circumstances. Implementers of the standard are responsible for determining appropriate safety, security, environmental, and health practices or regulatory requirements.

This IEEE document is made available for use subject to important notices and legal disclaimers. These notices and disclaimers appear in all publications containing this document and may be found under the heading "Important Notice" or "Important Notices and Disclaimers Concerning IEEE Documents." They can also be obtained on request from IEEE or viewed at http://standards.ieee.org/IPR/disclaimers.html.

#### 1. Overview

## (standards.iteh.ai)

 
 ISO/IEEE 11073-10415:2010

 1.1 Scope
 https://standards.iteh.ai/catalog/standards/sist/c850e95f-7923-4ee5-8682a5d272662942/iso-ieee-11073-10415-2010

Within the context of the ISO/IEEE 11073 family of standards for device communication, this standard establishes a normative definition of communication between personal telehealth weighing scale devices and compute engines (e.g., cell phones, personal computers, personal health appliances, and set top boxes) in a manner that enables plug-and-play interoperability. It leverages appropriate portions of existing standards, including ISO/IEEE 11073 terminology, information models, application profile standards, and transport standards. It specifies the use of specific term codes, formats, and behaviors in telehealth environments restricting optionality in base frameworks in favor of interoperability. This standard defines a common core of communication functionality for personal telehealth weighing scales.

#### 1.2 Purpose

This standard addresses a need for an openly defined, independent standard for controlling information exchange to and from personal health devices and compute engines (e.g., cell phones, personal computers, personal health appliances, and set top boxes). Interoperability is the key to growing the potential market for these devices and to enabling people to be better informed participants in the management of their health.

#### 1.3 Context

See IEEE Std 11073-20601<sup>™</sup> for an overview of the environment within which this standard is written.

This document, IEEE Std 11073-10415, defines the device specialization for the weighing scale, being a specific agent type, and it provides a description of the device concepts, its capabilities, and its implementation according to this standard.

This standard is based on IEEE Std 11073-20601, which in turn draws information from both ISO/IEEE 11073-10201:2004  $[B4]^1$  and ISO/IEEE 11073-20101:2004 [B5]. The medical device encoding rules (MDER) used within this standard are fully described in IEEE Std 11073-20601.

This standard reproduces relevant portions of the nomenclature found in ISO/IEEE 11073-10101:2004 [B3] and adds new nomenclature codes for the purposes of this standard. Between this standard and IEEE Std 11073-20601, all required nomenclature codes for implementation are documented.

NOTE— In this standard, IEEE Std 11073-104zz is used to refer to the collection of device specialization standards that utilize IEEE Std 11073-20601, where zz can be any number from 01 to 99, inclusive.<sup>2</sup>

#### 2. Normative references

The following referenced documents are indispensable for the application of this document (i.e., they must be understood and used, so that each referenced document is cited in text and its relationship to this document is explained). For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments or corrigenda) applies.

IEEE Std 11073-20601<sup>™</sup>-2008, Health informatics—Personal health device communication—Part 20601: Application profile—Optimized Exchange Protocol.<sup>3,4</sup>

<u>ISO/IEEE 11073-10415:2010</u>

See Annex A for all http://mattiverinaterial/referenced/by/th/is/standard\_f-7923-4ee5-8682a5d272662942/iso-ieee-11073-10415-2010

#### 3. Definitions, acronyms, and abbreviations

#### 3.1 Definitions

For the purposes of this standard, the following terms and definitions apply. *The Authoritative Dictionary of IEEE Standards* [B2] should be referenced for terms not defined in this clause.

3.1.1. agent: A node that collects and transmits personal health data to an associated manager.

**3.1.2. class:** In object-oriented modeling, it describes the attributes, methods, and events that objects instantiated from the class utilize.

#### 3.1.3. compute engine: See: manager.

**3.1.4. device:** A term used to refer to a physical apparatus implementing either an agent or a manager role.

**3.1.5. handle:** An unsigned 16-bit number that is locally unique and identifies one of the object instances within an agent.

<sup>&</sup>lt;sup>1</sup>The numbers in brackets correspond to those of the bibliography in Annex A.

<sup>&</sup>lt;sup>2</sup> Notes in text, tables, and figures are given for information only and do not contain requirements needed to implement the standard. <sup>3</sup>The IEEE standards or products referred to in this clause are trademarks of the Institute of Electrical and Electronics Engineers, Inc.

<sup>&</sup>lt;sup>4</sup>IEEE publications are available from the Institute of Electrical and Electronics Engineers, 445 Hoes Lane, Piscataway, NJ 08854, USA (http://standards.ieee.org/).

**3.1.6. manager:** A node receiving data from one or more agent systems. Some examples of managers include a cellular phone, health appliance, set top box, or a computer system.

**3.1.7. mass:** An intrinsic property of matter that can be measured using the effect of the gravitational field on an object.

#### 3.1.8. obj-handle: See: handle.

**3.1.9. object:** In object-oriented modeling, a particular instantiation of a class. The instantiation realizes attributes, methods, and events from the class.

3.1.10. personal health device: A device used in personal health applications.

#### 3.1.11. personal telehealth device: See: personal health device.

**3.1.12. weight:** The force that results from the exertion of gravity on an object. The weight is directly proportional to the mass of the object. However, in the health care domain the term body weight is typically used to denote the body mass of a person. This notation applies also to this standard.

#### 3.2 Acronyms and abbreviations

APDU	application protocol data unit
ASN.1	Abstract Syntax Notation One
BMI	body mass index ANDARD PREVIEW
DIM	domain information model
EUI-64	extended unique identifier (64 bits) it eh.ai)
ICS	implementation conformance statement
MDC	medical device communication
MDER	medical device encoding rules
MDS	https://stanlards.teh.av/catalog/standards/sist/c850e95f-7923-4ee5-8682-
MOC	managed object class <sup>942/iso-ieee-11073-10415-2010</sup>
PHD	personal health device
RT-SA	real-time sample array
VMO	virtual medical object
VMS	virtual medical system

#### 4. Introduction to ISO/IEEE 11073 personal health devices

#### 4.1 General

This standard and the remainder of the series of ISO/IEEE 11073 personal health device (PHD) standards fit in the larger context of the ISO/IEEE 11073 series of standards. The full suite of standards enables agents to interconnect and interoperate with managers and with computerized health-care information systems. See IEEE Std 11073-20601 for a description of the guiding principles for this series of ISO/IEEE 11073 personal health device standards.

IEEE Std 11073-20601 supports the modeling and implementation of an extensive set of personal health devices. This standard defines aspects of the weighing scale device. It describes all aspects necessary to implement the application layer services and data exchange protocol between an ISO/IEEE 11073 PHD weighing scale agent and a manager. This standard defines a subset of the objects and functionality contained in IEEE Std 11073-20601 and extends and adds definitions where appropriate. All new definitions are given in Annex B in Abstract Syntax Notation One (ASN.1) [B6]. Nomenclature codes referenced in this standard, which are not defined in ISO/IEEE 11073-20601, are normatively defined in Annex C.

#### 4.2 Introduction to IEEE 11073-20601 modeling constructs

#### 4.2.1 General

The ISO/IEEE 11073 series of standards, and in particular IEEE Std 11073-20601, is based on an objectoriented systems management paradigm. The overall system model is divided into three principal components: the domain information model (DIM), the service model, and the communication model. See IEEE Std 11073-20601 for a detailed description of the modeling constructs.

#### 4.2.2 Domain information model

The DIM is a hierarchical model that describes an agent as a set of objects. These objects and their attributes represent the elements that control behavior and report on the status of the agent and data that an agent can communicate to a manager. Communication between the agent and the manager is defined by the application protocol in IEEE Std 11073-20601.

#### 4.2.3 Service model

The service model defines the conceptual mechanisms for the data exchange services. Such services are mapped to messages that are exchanged between the agent and the manager. Protocol messages within the ISO/IEEE 11073 series of standards are defined in ASN.1. The messages defined in IEEE Std 11073-20601 can coexist with messages defined in other standard application profiles defined in the ISO/IEEE 11073 series of standards.

## 4.2.4 Communication model (standards.iteh.ai)

In general, the communication model <u>supports-the(topology) of one</u> or more agents communicating over logical point-to-point connections ito ai/single/manager/sFor8each5logical4point-to-point connection, the dynamic system behavior is defined by a connection state machine as specified in IEEE Std 11073-20601.

#### 4.2.5 Implementing the models

An agent implementing this standard shall implement all mandatory elements of the information, service, and communication models as well as all conditional elements where the condition is met. The agent should implement the recommended elements, and it may implement any combination of the optional elements. A manager implementing this standard shall utilize at least one of the mandatory, conditional, recommended, or optional elements. In this context, "utilize" means to use the element as part of the primary function of the manager device. For example, a manager whose primary function is to display data would need to display a piece of data in the element in order to utilize it.

#### 5. Weighing scale device concepts and modalities

#### 5.1 General

This clause presents the general concepts of weighing scale devices. In the context of personal health devices in this family of standards, a weighing scale is a device that measures the body weight of a person and, optionally, determines other physiological quantities (e.g., the body mass index or the height of a person). Weighing scale devices considered in this standard are typically placed on the floor with a person stepping on the device to perform a weight measurement, with the result being converted into mass internally of the device.

In the personal health context, the body weight of a person is typically not measured more frequently than twice a day.

Weighing scale devices may use a variety of techniques for measuring body weight. One typical method is to place several strain-gauge load cells under the measurement plane to convert deformation into weight.

#### 5.2 Body weight

The primary data type of a weighing scale device is body weight. It has measurement units of kilograms (kg) or pounds (lb).

#### 5.3 Body height

If body mass index reporting is supported, then body height is required. Body height denotes the actual height of the person using a weighing scale device. It has measurement units of centimeters (cm) or inches (in). This observation is typically entered manually.

#### 5.4 Body mass index

The body mass index (BMI) is a measure for indicating an overweight or underweight condition of a person and is defined as the individual's body weight, in kilograms, divided by the square of height, in meters (see Garrow and Webster [B1]):

$$BMI = \frac{body weight [kg]}{body height squared (m2) and ards.iteh.ai)}$$

BMI is not measured directly but is derived from body weight and body height. In the case where pounds and inches are used as measurement units instead of kilograms and meters the BME may be calculated as follows: a5d272662942/iso-ieee-11073-10415-2010

BMI =  $703 \times \frac{\text{body weight [lb]}}{\text{body height squared [in^2]}}$ 

Using the value 703 as a conversion factor gives a relative error with respect to using kilograms and meters of less than 0.01%.

#### 6. Weighing scale domain information model

#### 6.1 Overview

This clause describes the domain information model of the weighing scale.

#### 6.2 Class extensions

In this standard, no class extensions are defined with respect to IEEE Std 11073-20601.

#### 6.3 Object instance diagram

The object instance diagram of the weighing scale domain information model, defined for the purposes of this standard, is shown in Figure 1.

The objects of the DIM, as shown in Figure 1, are described in 6.4 to 6.12. This includes the medical device system (MDS) object (see 6.5), the numeric objects (see 6.6), the real-time sample array (RT-SA) objects (see 6.7), the enumeration objects (see 6.8), the PM-store objects (see 6.9), and the scanner objects (see 6.10). See 6.11 for rules for extending the weighing scale information model beyond elements as described in this standard. Each clause that describes an object of the weighing scale contains the following information:

- The nomenclature code used to identify the class of the object. One example of where this code is used is the configuration event, where the object class is reported for each object. This allows the manager to determine whether the class of the object being specified is a numeric, real-time sample array, enumeration, scanner, or PM-store class.
- The attributes of the object. Each object has attributes that represent and convey information on the physical device and its data sources. Each object has a Handle attribute that identifies the object instance within an agent. Attribute values are accessed and modified using methods such as GET and SET. Attributes types are defined using ASN.1. The ASN.1 definitions for new attribute types specific to this standard are in Annex B, and the ASN.1 definitions for existing attribute types referenced in this standard are in IEEE Std 11073-20601.
- The methods available on the object DARD PREVIEW
- The potential events generated by the object. Data are sent to the manager using events.
- The available services such as getting or setting attributes.

#### ISO/IEEE 11073-10415:2010

#### https://standards.iteh.ai/catalog/standards/sist/c850e95f-7923-4ee5-8682-

The attributes for each class are defined in tables that specify the name of the attribute, its value, and its qualifier. The qualifiers mean M — Attribute is Mandatory, C — Attribute is Conditional and depends on the condition stated in the Remark or Value column (if IEEE Std 11073-20601 is referenced, then it contains the conditions), R — Attribute is Recommended, NR — Attribute is Not Recommended, and O — Attribute is Optional. Mandatory attributes shall be implemented by the agent. Conditional attributes shall be implemented otherwise. Recommended attributes should be implemented by the agent. Not recommended attributes should not be implemented by the agent. Optional attributes may be implemented by the agent.

The attributes can be either static, meaning that they shall remain unchanged after the configuration is agreed upon, or dynamic, meaning that the attribute may change at some point after configuration.

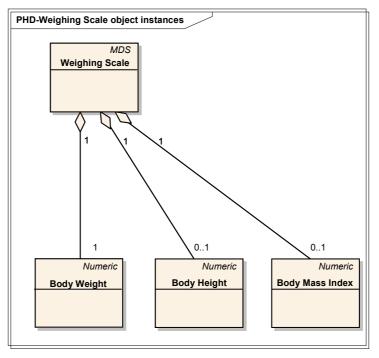


Figure 1—Weighing scale—domain information model iTeh STANDARD PREVIEW

## 6.4 Types of configuration (standards.iteh.ai)

#### ISO/IEEE 11073-10415:2010

6.4.1 General https://standards.iteh.ai/catalog/standards/sist/c850e95f-7923-4ee5-8682-

As specified in IEEE Std 11073-20601, there are two styles of configuration available. Subclauses 6.4.2 and 6.4.3 briefly introduce standard and extended configurations.

#### 6.4.2 Standard configuration

Standard configurations are defined in the IEEE 11073-104zz specializations (such as this standard) and are assigned a well-known identifier (Dev-Configuration-Id). The usage of a standard configuration is negotiated at association time between the agent and the manager. If the manager acknowledges that it recognizes and wants to operate using the configuration, then the agent can send measurements immediately. If the manager does not understand the configuration, the agent provides the configuration prior to transmitting measurement information.

#### 6.4.3 Extended configuration

In extended configurations, the agent's configuration is not predefined in a standard. The agent determines the objects, attributes, and values that are used in a configuration and assigns a configuration identifier. When the agent associates with a manager, it negotiates an acceptable configuration. Typically, the manager does not recognize the agent's configuration on the first connection, so the manager responds that the agent must send its configuration information as a configuration event report. If, however, the manager already recognizes the configuration, either because it was preloaded in some way or the agent had previously associated with the manager, then the manager responds that the configuration is known and no further configuration information needs to be sent.