

---

---

**Hexagon head screws — Product grades  
A and B**

*Vis à tête hexagonale entièrement filetées — Grades A et B*

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 4017:2011](https://standards.iteh.ai/catalog/standards/sist/44cd40f2-de7c-412a-a6f1-32007dc0cf8e/iso-4017-2011)

<https://standards.iteh.ai/catalog/standards/sist/44cd40f2-de7c-412a-a6f1-32007dc0cf8e/iso-4017-2011>



## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 4017:2011

<https://standards.iteh.ai/catalog/standards/sist/44cd40f2-de7c-412a-a6f1-32007dc0cfae/iso-4017-2011>



### **COPYRIGHT PROTECTED DOCUMENT**

© ISO 2011

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 4017 was prepared by Technical Committee ISO/TC 2, *Fasteners*, Subcommittee SC 10, *Product standards for fasteners*.

This fourth edition cancels and replaces the third edition (ISO 4017:1999), of which it constitutes a minor revision.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 4017:2011](https://standards.iteh.ai/catalog/standards/sist/44cd40f2-de7c-412a-a6f1-32007dc0cfac/iso-4017-2011)

<https://standards.iteh.ai/catalog/standards/sist/44cd40f2-de7c-412a-a6f1-32007dc0cfac/iso-4017-2011>

## Introduction

This International Standard belongs to a complete family of product standards developed by ISO on external hexagon drive fasteners. It comprises the following:

- a) hexagon head bolts (ISO 4014, ISO 4015, ISO 4016 and ISO 8765);
- b) hexagon head screws (ISO 4017, ISO 4018 and ISO 8676);
- c) hexagon nuts (ISO 4032, ISO 4033, ISO 4034, ISO 4035, ISO 4036, ISO 7040, ISO 7041, ISO 7042, ISO 7719, ISO 7720, ISO 8673, ISO 8674, ISO 8675, ISO 10511, ISO 10512 and ISO 10513);
- d) hexagon bolts with flange (ISO 4162, ISO 15071 and ISO 15072);
- e) hexagon nuts with flange (ISO 4161, ISO 7043, ISO 7044, ISO 10663, ISO 12125, ISO 12126 and ISO 21670).

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 4017:2011](https://standards.iteh.ai/catalog/standards/sist/44cd40f2-de7c-412a-a6f1-32007dc0cfae/iso-4017-2011)

<https://standards.iteh.ai/catalog/standards/sist/44cd40f2-de7c-412a-a6f1-32007dc0cfae/iso-4017-2011>

# Hexagon head screws — Product grades A and B

## 1 Scope

This International Standard specifies the characteristics of hexagon head screws with threads from M1,6 up to and including M64, of product grade A for threads M1,6 to M24 and nominal lengths up to and including  $10d$  or 150 mm, whichever is the shorter, and product grade B for threads over M24 or nominal lengths over  $10d$  or 150 mm, whichever is the shorter.

NOTE This type of product is the same as that covered by ISO 4014 with the exception of threading up to head and nominal lengths up to and including 200 mm as preferred lengths.

If, in special cases, specifications other than those listed in this International Standard are required, they can be selected from existing International Standards, for example ISO 724, ISO 888, ISO 898-1, ISO 965-1, ISO 3506-1, ISO 4753 and ISO 4759-1.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 225, *Fasteners — Bolts, screws, studs and nuts — Symbols and descriptions of dimensions*

ISO 724, *ISO general-purpose metric screw threads — Basic dimensions*

ISO 898-1, *Mechanical properties of fasteners made of carbon steel and alloy steel — Part 1: Bolts, screws and studs with specified property classes — Coarse thread and fine pitch thread*

ISO 965-1, *ISO general-purpose metric screw threads — Tolerances — Part 1: Principles and basic data*

ISO 3269, *Fasteners — Acceptance inspection*

ISO 3506-1, *Mechanical properties of corrosion-resistant stainless steel fasteners — Part 1: Bolts, screws and studs*

ISO 3508, *Thread run-outs for fasteners with thread in accordance with ISO 261 and ISO 262*

ISO 4042, *Fasteners — Electroplated coatings*

ISO 4753, *Fasteners — Ends of parts with external ISO metric thread*

ISO 4759-1, *Tolerances for fasteners — Part 1: Bolts, screws, studs and nuts — Product grades A, B and C*

ISO 6157-1, *Fasteners — Surface discontinuities — Part 1: Bolts, screws and studs for general requirements*

ISO 8839, *Mechanical properties of fasteners — Bolts, screws, studs and nuts made of non-ferrous metals*

ISO 8992, *Fasteners — General requirements for bolts, screws, studs and nuts*


ISO 10683, *Fasteners — Non-electrolytically applied zinc flake coatings*

3 Dimensions

See Figure 1 and Tables 1 and 2.

Symbols and descriptions of dimensions are specified in ISO 225.

Dimensions in millimetres

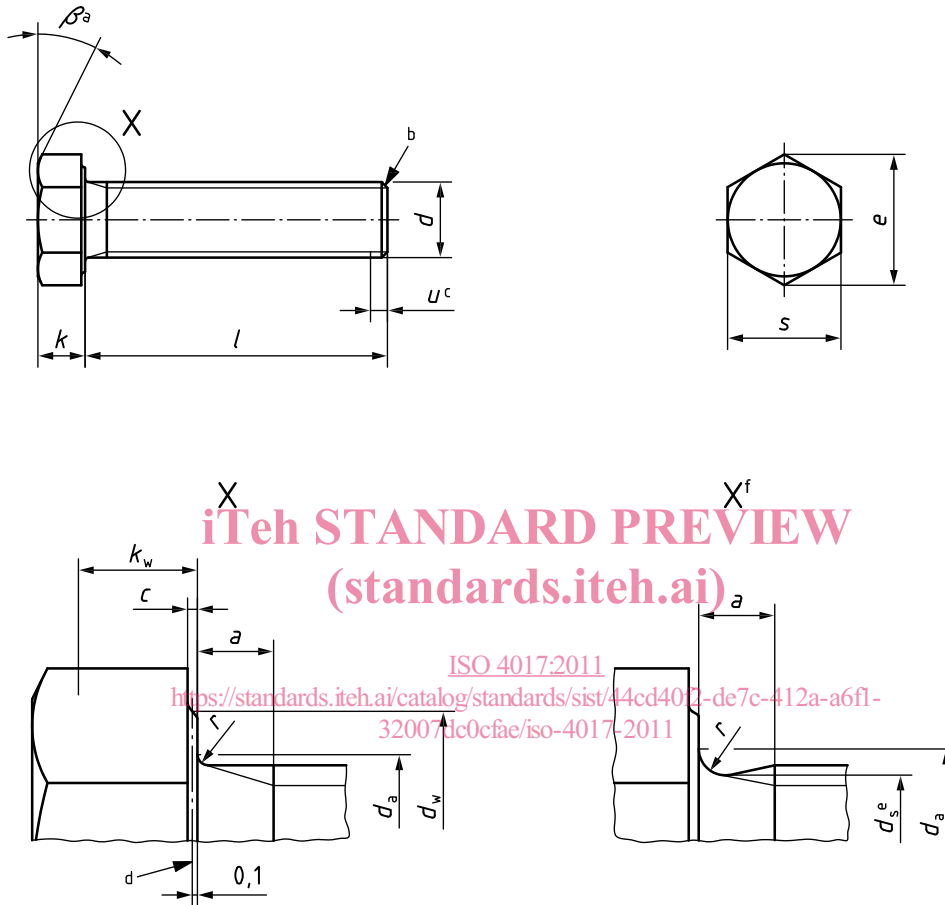

- a  $\beta = 15^\circ$  to  $30^\circ$ .
- b Point shall be chamfered or for threads  $\leq M4$  may be as-rolled (sheared end) in accordance with ISO 4753.
- c Incomplete thread  $u \leq 2P$ .
- d Reference datum for  $d_w$ .
- e  $d_s \approx$  pitch diameter.
- f Permissible shape.

Figure 1

Table 1 — Preferred threads

Dimensions in millimetres

Thread, <i>d</i>				M1,6	M2	M2,5	M3	M4	M5	M6	
<i>p</i> <sup>a</sup>				0,35	0,4	0,45	0,5	0,7	0,8	1	
<i>a</i>			max. <sup>b</sup>	1,05	1,2	1,35	1,5	2,1	2,4	3	
			min.	0,35	0,4	0,45	0,5	0,7	0,8	1	
<i>c</i>			max.	0,25	0,25	0,25	0,40	0,40	0,50	0,50	
			min.	0,10	0,10	0,10	0,15	0,15	0,15	0,15	
<i>d</i> <sub>a</sub>			max.	2	2,6	3,1	3,6	4,7	5,7	6,8	
<i>d</i> <sub>w</sub>	Product grade	A	min.	2,27	3,07	4,07	4,57	5,88	6,88	8,88	
		B		2,30	2,95	3,95	4,45	5,74	6,74	8,74	
<i>e</i>	Product grade	A	min.	3,41	4,32	5,45	6,01	7,66	8,79	11,05	
		B		3,28	4,18	5,31	5,88	7,50	8,63	10,89	
<i>k</i>	Product grade	A	nom.	1,1	1,4	1,7	2	2,8	3,5	4	
			max.	1,225	1,525	1,825	2,125	2,925	3,65	4,15	
		B	min.	0,975	1,275	1,575	1,875	2,675	3,35	3,85	
			max.	1,3	1,6	1,9	2,2	3,0	3,74	4,24	
<i>k</i> <sub>w</sub> <sup>c</sup>	Product grade	A	min.	0,68	0,89	1,10	1,31	1,87	2,35	2,70	
		B		0,63	0,84	1,05	1,26	1,82	2,28	2,63	
<i>r</i>			min.	0,1	0,1	0,1	0,1	0,2	0,2	0,25	
<i>s</i>	Product grade	A	nom. = max.	3,20	4,00	5,00	5,50	7,00	8,00	10,00	
			B	min.	3,02	3,82	4,82	5,32	6,78	7,78	9,78
				min.	2,90	3,70	4,70	5,20	6,64	7,64	9,64
Product grade											
A											
B											
nom.	min.	max.	min.	max.							
2	1,8	2,2	—	—							
3	2,8	3,2	—	—							
4	3,76	4,24	—	—							
5	4,76	5,24	—	—							
6	5,76	6,24	—	—							
8	7,71	8,29	—	—							
10	9,71	10,29	—	—							
12	11,65	12,35	—	—							
16	15,65	16,35	—	—							
20	19,58	20,42	18,95	21,05							
25	24,58	25,42	23,95	26,05							
30	29,58	30,42	28,95	31,05							
35	34,5	35,5	33,75	36,25							
40	39,5	40,5	38,75	41,25							
45	44,5	45,5	43,75	46,25							
50	49,5	50,5	48,75	51,25							
55	54,4	55,6	53,5	56,5							
60	59,4	60,6	58,5	61,5							
65	64,4	65,6	63,5	66,5							
70	69,4	70,6	68,5	71,5							
80	79,4	80,6	78,5	81,5							
90	89,3	90,7	88,25	91,75							
100	99,3	100,7	98,25	101,75							
110	109,3	110,7	108,25	111,75							
120	119,3	120,7	118,25	121,75							
130	129,2	130,8	128	132							
140	139,2	140,8	138	142							
150	149,2	150,8	148	152							
160	—	—	158	162							
180	—	—	178	182							
200	—	—	197,7	202,3							

Table 1 (continued)

Dimensions in millimetres

Thread, <i>d</i>				M8	M10	M12	M16	M20	M24	
<i>p</i> <sup>a</sup>				1,25	1,5	1,75	2	2,5	3	
<i>a</i>			max. <sup>b</sup>	4	4,5	5,3	6	7,5	9	
			min.	1,25	1,5	1,75	2	2,5	3	
<i>c</i>			max.	0,15	0,15	0,15	0,2	0,2	0,2	
			min.	0,6	0,6	0,6	0,8	0,8	0,8	
<i>d</i> <sub>a</sub>				max.	9,2	11,2	13,7	17,7	22,4	26,4
<i>d</i> <sub>w</sub>	Product grade	A	min.	11,63	14,63	16,63	22,49	28,19	33,61	
				B	11,47	14,47	16,47	22	27,7	33,25
<i>e</i>	Product grade	A	min.	14,38	17,77	20,03	26,75	33,53	39,98	
				B	14,20	17,59	19,85	26,17	32,95	39,55
<i>k</i>	Product grade	A	nom.	5,3	6,4	7,5	10	12,5	15	
			max.	5,45	6,58	7,68	10,18	12,715	15,215	
			min.	5,15	6,22	7,32	9,82	12,285	14,785	
			B	max.	5,54	6,69	7,79	10,29	12,85	15,35
<i>k</i> <sub>w</sub> <sup>c</sup>	Product grade	A	min.	3,61	4,35	5,12	6,87	8,6	10,35	
				B	3,54	4,28	5,05	6,8	8,51	10,26
				nom. = max.	13,00	16,00	18,00	24,00	30,00	36,00
				A	12,73	15,73	17,73	23,67	29,67	35,38
<i>s</i>	Product grade	B	min.	12,57	15,57	17,57	23,16	29,16	35	
Product grade				iTeH STANDARD PREVIEW (standards.iteh.ai)						
A										
Product grade				iTeH STANDARD PREVIEW (standards.iteh.ai)						
B										
/				iTeH STANDARD PREVIEW (standards.iteh.ai)						
nom.	min.	max.	min.							max.
2	1,8	2,2	—	—	ISO 4017:2011 <a href="https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011">https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011</a>					
3	2,8	3,2	—	—						
4	3,76	4,24	—	—	ISO 4017:2011 <a href="https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011">https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011</a>					
5	4,76	5,24	—	—						
6	5,76	6,24	—	—	ISO 4017:2011 <a href="https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011">https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011</a>					
8	7,71	8,29	—	—						
10	9,71	10,29	—	—	ISO 4017:2011 <a href="https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011">https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011</a>					
12	11,65	12,35	—	—						
16	15,65	16,35	—	—	ISO 4017:2011 <a href="https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011">https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011</a>					
20	19,58	20,42	18,95	21,05						
25	24,58	25,42	23,95	26,05	ISO 4017:2011 <a href="https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011">https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011</a>					
30	29,58	30,42	28,95	31,05						
35	34,5	35,5	33,75	36,25	ISO 4017:2011 <a href="https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011">https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011</a>					
40	39,5	40,5	38,75	41,25						
45	44,5	45,5	43,75	46,25	ISO 4017:2011 <a href="https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011">https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011</a>					
50	49,5	50,5	48,75	51,25						
55	54,4	55,6	53,5	56,5	ISO 4017:2011 <a href="https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011">https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011</a>					
60	59,4	60,6	58,5	61,5						
65	64,4	65,6	63,5	66,5	ISO 4017:2011 <a href="https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011">https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011</a>					
70	69,4	70,6	68,5	71,5						
80	79,4	80,6	78,5	81,5	ISO 4017:2011 <a href="https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011">https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011</a>					
90	89,4	90,7	88,25	91,75						
100	99,3	100,7	98,25	101,75	ISO 4017:2011 <a href="https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011">https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011</a>					
110	109,3	110,7	108,25	111,75						
120	119,3	120,7	118,25	121,75	ISO 4017:2011 <a href="https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011">https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011</a>					
130	129,2	130,8	128	132						
140	139,2	140,8	138	142	ISO 4017:2011 <a href="https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011">https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011</a>					
150	149,2	150,8	148	152						
160	—	—	158	162	ISO 4017:2011 <a href="https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011">https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011</a>					
180	—	—	178	182						
200	—	—	197,7	202,3	ISO 4017:2011 <a href="https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011">https://standards.iteh.ai/catalog/standards/sist/44c14012-de7c-412a-a011-32007dc0cfae/iso-4017-2011</a>					



Table 1 (continued)

Dimensions in millimetres

Thread, <i>d</i>			M30	M36	M42	M48	M56	M64
<i>P</i> <sup>a</sup>			3,5	4	4,5	5	5,5	6
<i>a</i>		max. <sup>b</sup>	10,5	12	13,5	15	16,5	18
		min.	3,5	4	4,5	5	5,5	6
<i>c</i>		max.	0,2	0,2	0,3	0,3	0,3	0,3
		min.	0,8	0,8	1	1	1	1
<i>d<sub>a</sub></i>		max.	33,4	39,4	45,6	52,6	63	71
<i>d<sub>w</sub></i>	Product grade	A	—	—	—	—	—	—
		B	min.	42,75	51,11	59,95	69,45	78,66
<i>e</i>	Product grade	A	—	—	—	—	—	—
		B	min.	50,85	60,79	71,3	82,6	93,56
<i>k</i>	Product grade	nom.	18,7	22,5	26	30	35	40
		max.	—	—	—	—	—	—
	A	min.	—	—	—	—	—	—
		max.	19,12	22,92	26,42	30,42	35,5	40,5
B	min.	18,28	22,08	25,58	29,58	34,5	39,5	
	max.	—	—	—	—	—	—	
<i>k<sub>w</sub></i> <sup>c</sup>	Product grade	A	—	—	—	—	—	—
		B	min.	12,8	15,46	17,91	20,71	24,15
<i>r</i>		min.	1	1	1,2	1,6	2	2
		nom. = max.	46	55,0	65,0	75,0	85,0	95,0
<i>s</i>	Product grade	A	—	—	—	—	—	—
		B	min.	45	53,8	63,1	73,1	82,8
Product grade								
A								
B								
<i>l</i>								
nom.	min.	max.	min.	max.				
2	1,8	2,2	—	—				
3	2,8	3,2	—	—				
4	3,76	4,24	—	—				
5	4,76	5,24	—	—				
6	5,76	6,24	—	—				
8	7,71	8,29	—	—				
10	9,71	10,29	—	—				
12	11,65	12,35	—	—				
16	15,65	16,35	—	—				
20	19,58	20,42	18,95	21,05				
25	24,58	25,42	23,95	26,05				
30	29,58	30,42	28,95	31,05				
35	34,5	35,5	33,75	36,25				
40	39,5	40,5	38,75	41,25				
45	44,5	45,5	43,75	46,25				
50	49,5	50,5	48,75	51,25				
55	54,4	55,6	53,5	56,5				
60	59,4	60,6	58,5	61,5				
65	64,4	65,6	63,5	66,5				
70	69,4	70,6	68,5	71,5				
80	79,4	80,6	78,5	81,5				
90	89,3	90,7	88,25	91,75				
100	99,3	100,7	98,25	101,75				
110	109,3	110,7	108,25	111,75				
120	119,3	120,7	118,25	121,75				
130	129,2	130,8	128	132				
140	139,2	140,8	138	142				
150	149,2	150,8	148	152				
160	—	—	158	162				
180	—	—	178	182				
200	—	—	197,7	202,3				
<p>NOTE The range of preferred lengths is between the solid, bold, stepped line:                      — for product grade A, above the discontinuous, stepped line;                      — for product grade B, below this line.</p>								
<p><sup>a</sup> <i>P</i> is the pitch of the thread.  <sup>b</sup> Values in accordance with <i>a<sub>max</sub></i>, normal series, in ISO 3508.  <sup>c</sup> <i>k<sub>w,min</sub></i> = 0,7 <i>k<sub>min</sub></i></p>								