



Designation: A 987 – 07

Standard Practice for Measuring Shape Characteristics of Tin Mill Products¹

This standard is issued under the fixed designation A 987; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope*

1.1 Shape is a significant quality characteristic for tin mill products. Plate-shape is affected by mill process factors plus the temper, thickness and width of the material supplied. It is the purpose of this practice to define accurately the different plate shape characteristics and to describe the practice(s) most commonly used to measure particular characteristics.

1.2 Quantitative limits are not addressed and should be established on an individual producer and user basis, where appropriate.

1.3 *This standard does not purport to address the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and to determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:²

A 599/A 599M Specification for Tin Mill Products, Electrolytic Tin-Coated, Cold-Rolled Sheet

A 623 Specification for Tin Mill Products, General Requirements

A 623M Specification for Tin Mill Products, General Requirements [Metric]

A 624/A 624M Specification for Tin Mill Products, Electrolytic Tin Plate, Single Reduced

A 625/A 625M Specification for Tin Mill Products, Black Plate, Single-Reduced

A 626/A 626M Specification for Tin Mill Products, Electrolytic Tin Plate, Double Reduced

A 650/A 650M Specification for Tin Mill Products, Black Plate, Double Reduced

A 657/A 657M Specification for Tin Mill Products, Black Plate Electrolytic Chromium-Coated, Single and Double Reduced

3. Classification

3.1 The substrate shall conform to all the requirements of the appropriate specifications as follows: Specifications **A 623**, **A 623M**, **A 599/A 599M**, **A 624/A 624M**, **A 625/A 625M**, **A 626/A 626M**, **A 650/A 650M**, and **A 657**.

4. Significance and Use

4.1 The definitions and procedures for measuring shape characteristics of tin mill products are provided so that purchasers and suppliers have common measuring procedures and definitions of shape characteristics. These procedures provide definitions and measuring techniques of shape characteristics. The intention of these definitions and measuring practices is not to provide a dimensional specification for shape characteristics, but rather common procedure(s) for quantifying shape anomalies.

5. Interferences

5.1 Measurement of shape often has been subjective, at best. Successful measurement of various shape anomalies on quantitative terms requires recognition of several factors that can interfere with accurate measurements.

5.1.1 Flat surfaces are required. Measurement of several anomalies require laying of the sample on a flat surface. A machined flat surface is recommended. Laying a sample on a floor may introduce error due to areas on a floor that are not flat.

5.1.2 Several anomalies are measured by hanging the sheet. Hanging by holding the sample with a hand can introduce error from pressures exerted by fingers. A mechanical single device clamp to help hold these samples is recommended.

5.1.3 Stepblock gauges or tapered gauges should be checked regularly with a calibrated hand micrometer. Wear or dirt build up could affect accuracy.

¹ This practice is under the jurisdiction of ASTM Committee A01 on Steel, Stainless Steel and Related Alloys and is the direct responsibility of Subcommittee A01.20 on Tin Mill Products.

Current edition approved Nov. 1, 2007. Published December 2007. Originally approved in 1998. Last previous edition approved in 2005 as A 987 - 05.

² For referenced ASTM standards, visit the ASTM website, www.astm.org, or contact ASTM Customer Service at service@astm.org. For *Annual Book of ASTM Standards* volume information, refer to the standard's Document Summary page on the ASTM website.

*A Summary of Changes section appears at the end of this standard.

5.1.4 Computer-based shape measuring instruments must be clean and the sensors must be in good condition. The sheet sample must be damage free.

6. Apparatus

6.1 Appropriate tools to measure shape anomalies are described along with drawings (attached) as required.

6.1.1 *Flat Surfaces*— Accurate measurements of shape anomalies require a flat surface, machined flat preferred.

6.1.2 *Machined Stepblock Gauge*—See Fig. 1, typically, steps are in 1/16-in. increments.

6.1.3 *Tapered Gauge*— See Fig. 2.

6.1.4 *Standard Ruler or Tape Measure*.

6.1.5 *Hand Micrometer*.

6.1.6 *Shape Test Jig*—Fig. 3, or other shape test jigs of appropriate design.

6.1.7 *Light-Weight Straight-Edge*.

6.1.8 *Computer-based Shape Measuring Instruments* are designed for flatness measurements on samples of cold rolled sheet products or tin mill products.

7. Procedure

Definitions and Measuring Practices of Shape Anomalies

7.1 *Wavy Edge* (See Fig. 4):

7.1.1 *Definition*—A series of rolling direction edge deviations from a recognized flat surface. When a sample is placed on a recognized flat table, wavy edges will appear as undulations along the edge, having the height (A) and a measurable cycle (B). This defect can be quantified using the “T” unit (see Section 8) or steepness calculations.

7.1.2 *Measuring Practices*:

7.1.2.1 A sample of approximately 3 ft [0.9 m] in length by coil width is placed on a flat table. Measure the height (A) at the peak point of each wave from the recognized flat surface with a tapered gauge or a stepblock gauge. Also measure the cycle length (B) from peak to peak of each wave with a ruler or tape measure.

7.1.2.2 Measure using a computer-based shape measuring instrument or other instrument of appropriate design.

7.2 *Ridge Buckle, Quarter Buckle, Center Buckle* (see Fig. 5):

7.2.1 *Definition*—These buckles are continuous deviations from a recognized flat surface occurring usually in narrow width areas parallel to the rolling direction other than at the sheet edges.

7.2.2 *Measuring Practices*:

7.2.2.1 A sheet sample of approximately 3 ft [0.9 m] by coil width is placed on a flat table. Push material diagonally along the sample to within 4 in. [10 cm] of the selected corner and measure the vertical uplift using a tapered gauge or a stepblock gauge.

7.2.2.2 Shear through the center line of the shape anomaly and measure as an edge wave using a tapered gauge or a stepblock gauge.

7.2.2.3 Measure using a computer-based shape measuring instrument or other instrument of appropriate design.

7.3 *Full Center* (see Fig. 6):

7.3.1 *Definition*—Any overall deviation of a sheet from a recognized flat surface occurring over a major portion of the sheet width parallel to the rolling direction other than at the sheet edges.

7.3.2 *Measuring Practices*:

7.3.2.1 A sheet sample of approximately 3 ft [0.9 m] by coil width is placed on a flat table. Push material diagonally along the sample to within 4 in. [10 cm] of the selected corner and measure the vertical uplift using a tapered gauge or a stepblock gauge.

7.3.2.2 Shear through the center line of the shape anomaly and measure as an edge wave using a tapered gauge or a stepblock gauge.


7.3.2.3 Measure using a computer-based shape measuring instrument or other instrument of appropriate design.

7.4 *Edge Lift* (see Fig. 7):

7.4.1 *Definition*—Any deviation of one sheet edge other than a wavy edge. This edge lift is parallel to the rolling direction and rises when placed on a recognized flat surface.

7.4.2 *Measuring Practice*— A sheet sample of approximately 3 ft [0.9 m] by coil width is placed on a flat table. Push material diagonally along the sheet to within 4 in. [10 cm] of the selected edge and measure the vertical distance (A) with a tapered gauge, a stepblock gauge, or a standard ruler.


7.5 *Coil Set and Reverse Coil Set* (see Fig. 8):

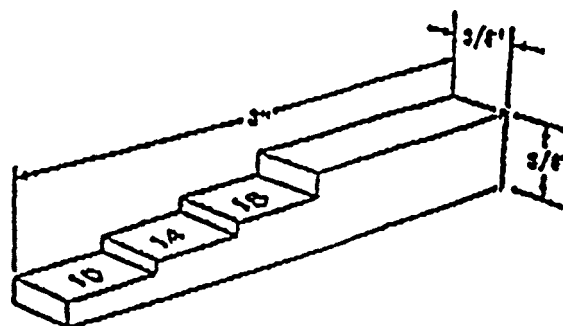

NOTE 1—This is a stepblock gauge for all thicknesses and sizes of cut sheets.


NOTE 2—Dimensions given are approximate overall dimensions.

FIG. 1 Shape Stepblock Gauge

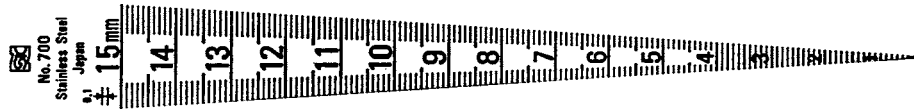

NOTE 1—This is a tapered gauge for all thicknesses and sizes of cut sheets.

FIG. 2 Shape Tapered Gauge

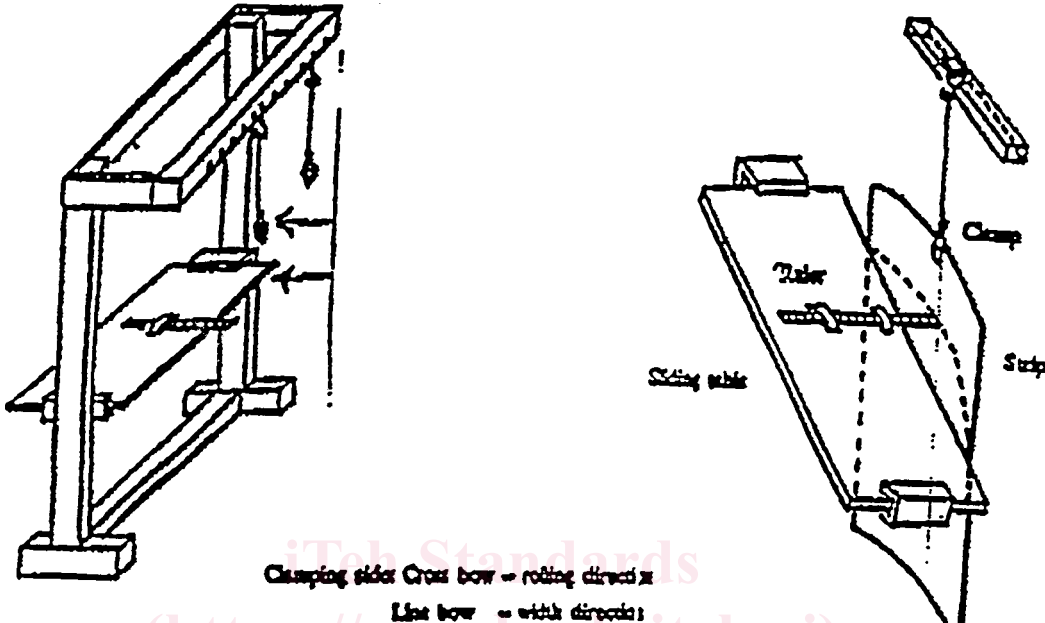

NOTE 1—To measure line bow (up or down) requires the use of a shape test jig.

FIG. 3 Shape Test Jig

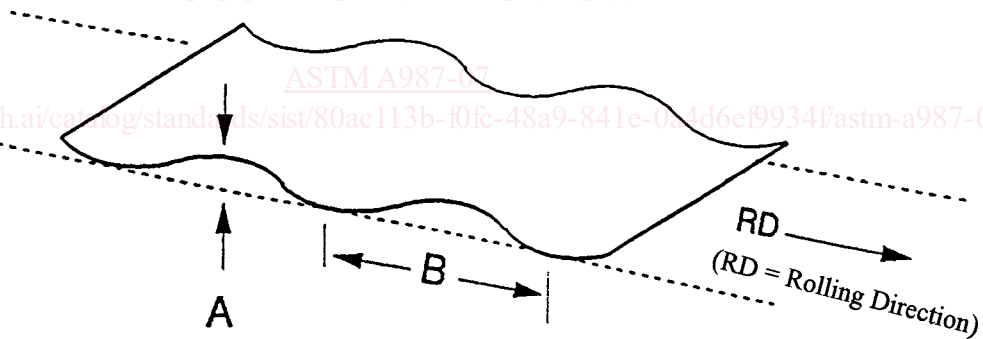


FIG. 4 Wavy Edge

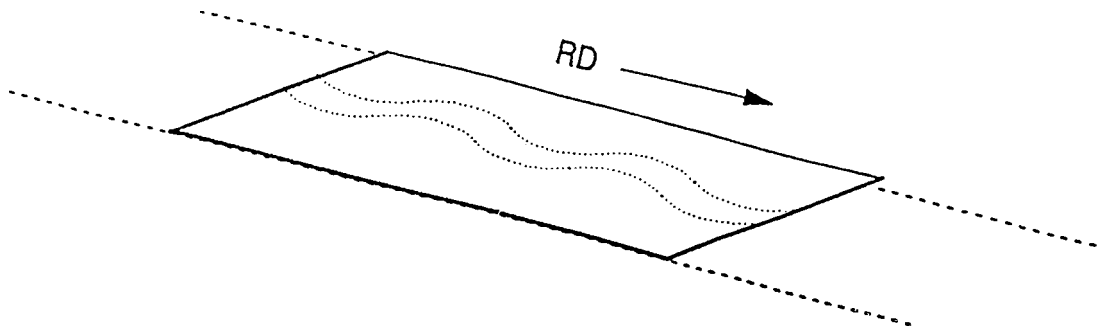


FIG. 5 Ridge Buckle, Quarter Buckle, Center Buckle

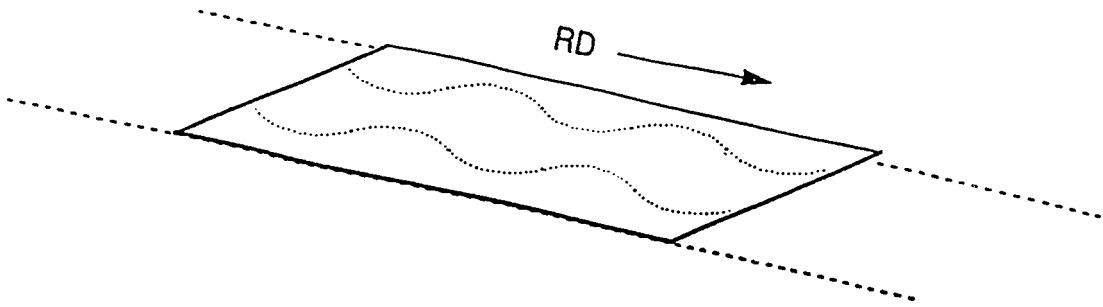


FIG. 6 Full Center



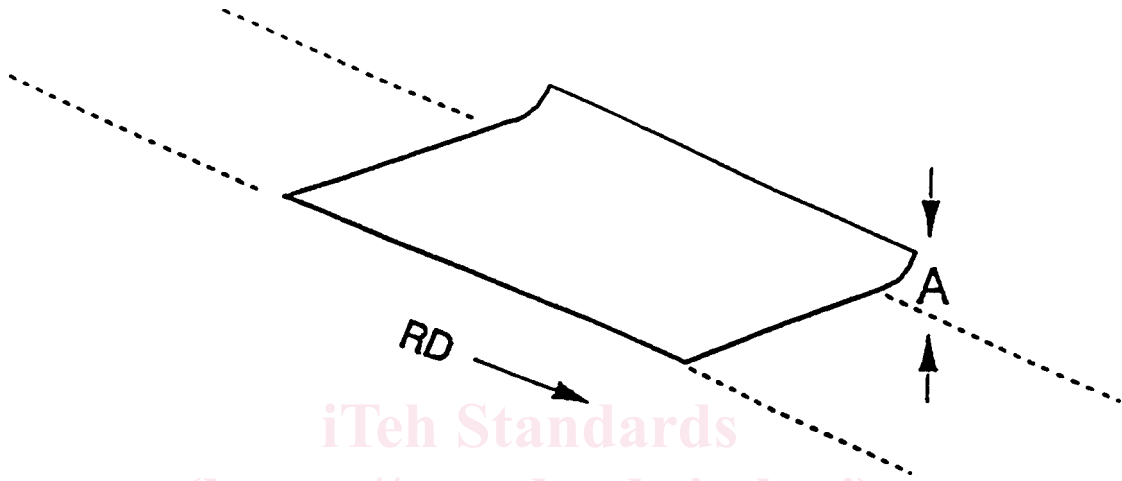


FIG. 7 Edge Lift

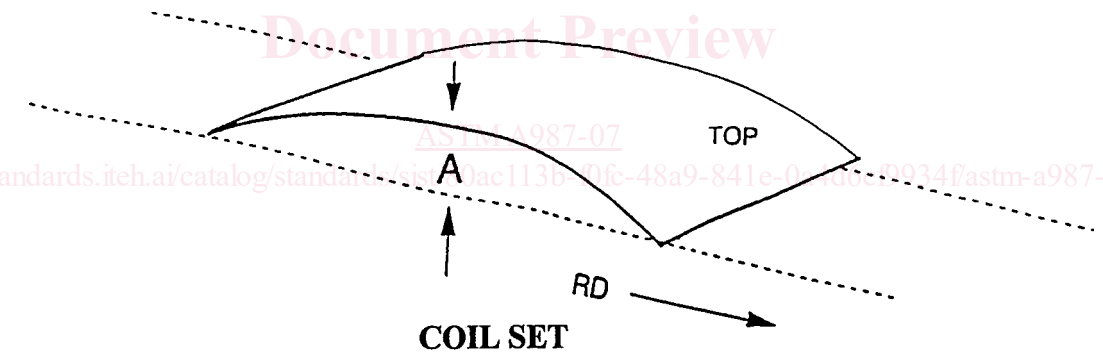

COIL SET

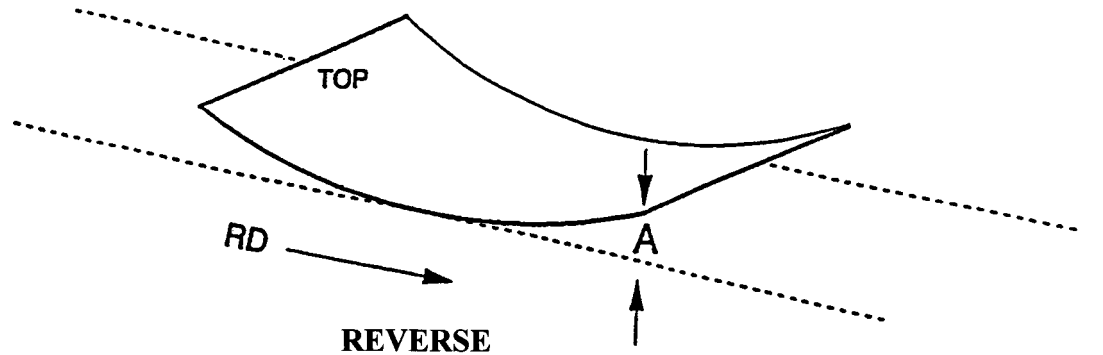

REVERSE
COIL SET

FIG. 8 Coil Set and Reverse Coil Set

7.5.1 *Definition*—A bow condition or deviation in the sheet as measured from a recognized flat surface. The deviation runs

parallel with the rolling direction and takes the shape of a coil. Reverse coil set reverses the shape of a coil. The degree of coil