INTERNATIONAL STANDARD

Fourth edition 2012-05-15

Prevailing torque type hexagon nuts (with non-metallic insert), style 2 — Property classes 9 and 12

Écrous hexagonaux autofreinés (à anneau non métallique), style 2 — Classes de qualité 9 et 12

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 7041:2012 https://standards.iteh.ai/catalog/standards/sist/9b08be0f-96b4-4e0a-b776a9c31651dd2d/iso-7041-2012



Reference number ISO 7041:2012(E)

iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 7041:2012 https://standards.iteh.ai/catalog/standards/sist/9b08be0f-96b4-4e0a-b776a9c31651dd2d/iso-7041-2012



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office Case postale 56 • CH-1211 Geneva 20 Tel. + 41 22 749 01 11 Fax + 41 22 749 09 47 E-mail copyright@iso.org Web www.iso.org

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 7041 was prepared by Technical Committee ISO/TC 2, *Fasteners*, Subcommittee SC 12, *Fasteners with metric internal thread*.

This fourth edition cancels and replaces the third edition (ISO 7041:2002), of which it constitutes a minor revision.

iTeh STANDARD PREVIEW (standards.iteh.ai)

iTeh STANDARD PREVIEW (standards.iteh.ai)

Prevailing torque type hexagon nuts (with non-metallic insert), style 2 — Property classes 9 and 12

1 Scope

This International Standard specifies the characteristics of prevailing torque type hexagon nuts (with nonmetallic insert), style 2, with threads from M5 up to and including M36, in product grade A for threads up to and including M16, and product grade B for threads above M16, and with property classes 9 and 12.

NOTE The dimensions of the nuts correspond to those given in ISO 4033 plus prevailing torque feature.

If other specifications are required, they can be selected from existing International Standards, e.g. ISO 261, ISO 724, ISO 898-2, ISO 965-2, ISO 2320 and ISO 4759-1.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 225, Fasteners — Bolts, screws, studs and nuts — Symbols and descriptions of dimensions

ISO 261, ISO general purpose metric screw threads - General plan

ISO 724, ISO general-purpose metric screw threads — Basic dimensions

ISO 898-2, Mechanical properties of fasteners made of carbon steel and alloy steel — Part 2: Nuts with specified property classes — Coarse thread and fine pitch thread

ISO 965-2, ISO general purpose metric screw threads — Tolerances — Part 2: Limits of sizes for general purpose external and internal screw threads — Medium quality

ISO 2320, Prevailing torque type steel nuts — Mechanical and performance properties

ISO 3269, Fasteners — Acceptance inspection

ISO 4042, Fasteners — Electroplated coatings

ISO 4759-1, Tolerances for fasteners — Part 1: Bolts, screws, studs and nuts — Product grades A, B and C

ISO 6157-2, Fasteners — Surface discontinuities — Part 2: Nuts


ISO 8992, Fasteners — General requirements for bolts, screws, studs and nuts

ISO 10683, Fasteners — Non-electrolytically applied zinc flake coatings

3 Dimensions

See Figure 1 and Table 1.

Symbols and descriptions of dimensions are specified in ISO 225.

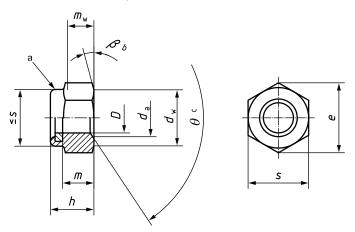

- ^a Prevailing torque element; the shape is at the discretion of the manufacturer.
- ^b $\beta = 15^{\circ}$ to 30°.
- ^c $\theta = 90^{\circ}$ to 120°.

iTeh STANDARD PREVIEW ^{Figure 1} (standards.iteh.ai)

Thread D		M5	M6	M8	M10	M12	(M14) ^a	M16	M20	M24	M30	M36
		1015	INIO	INIO	WITO	IVIIZ	(1114)		IVIZO	11124	14130	WI30
P^{b}		0,8	1	1,25	1,5	1,75	2	2	2,5	3	3,5	4
da	max.	5,75	6,75	8,75	10,80	13,00	15,10	17,30	21,60	25,90	32,40	38,9
	min.	5,00	6,00	8,00	10,00	12,00	14,00	16,00	20,00	24,00	30,00	36,0
d_{W}	min.	6,88	8,88	11,63	14,63	16,63	19,64	22,49	27,70	33,25	42,75	51,1
е	min.	8,79	11,05	14,38	17,77	20,03	23,36	26,75	32,95	39,55	50,85	60,7
1	max.	7,20	8,50	10,20	12,80	16,10	18,30	20,70	25,10	29,50	35,60	42,6
h	min.	6,62	7,92	9,50	12,10	15,40	17,00	19,40	23,00	27,40	33,10	40,1
m ^c	min.	4,80	5,40	7,14	8,94	11,57	13,40	15,70	19,00	22,60	27,30	33,1
m_{W}^{d}	min.	3,84	4,32	5,71	7,15	9,26	10,70	12,60	15,20	18,10	21,80	26,5
S	max.	8,00	10,00	13,00	16,00	18,00	21,00	24,00	30,00	36,00	46,00	55,0
	min.	7,78	9,78	12,73	15,73	17,73	20,67	23,67	29,16	35,00	45,00	53,8

https://standards.iteh.ai/catalog/standards/sist/9b08be0f-96b4-4e0a-b776imensions in millimetres

^a The size in parentheses/brackets should be avoided, if possible.

^b P is the pitch of the thread.

c Minimum thread height.

^d Minimum wrenching height.

4 Requirements and reference International Standards

See Table 2.

Material	Nut body	Steel				
material	Insert	For example polyamide				
General requirements	International Standard	ISO 8992				
Thread	Tolerance class	6Н				
Theau	International Standards	ISO 261, ISO 724, ISO 965-2				
Mechanical and performance	Property class	9, 12				
properties	International Standards	ISO 898-2, ISO 2320				
	Dreduct are de	For $D \leq$ M16: A				
Tolerance	Product grade	For <i>D</i> > M16: B				
	International Standard	ISO 4759-1				
		As processed.				
		Requirements for electroplating are specified in ISO 4042.				
Finish — Coating	STANDARD PH	Requirements for non-electrolytically applied zinc flake coatings are specified in ISO 10683.				
	(standards.iteh	Additional requirements or other finishes or coatings shall be agreed between the supplier and the purchaser.				
Surface integrity https://standa	ISO 7041:2012 rds.iteh.ai/catalog/standards/sist/9b08b	Limits for surface discontinuities are specified in 980 615712.a-b776-				
Acceptability	a9c31651dd2d/1so-7041-201	² Acceptance inspection is specified in ISO 3269.				

Table 2 — Requirements and reference International Standards

5 Designation

EXAMPLE A prevailing torque type hexagon nut, style 2, with non-metallic insert, thread M12 and property class 12, is designated as follows:

Prevailing torque type hexagon nut ISO 7041 - M12 - 12

Bibliography

[1] ISO 4033, Hexagon nuts, style 2 — Product grades A and B

iTeh STANDARD PREVIEW (standards.iteh.ai)

iTeh STANDARD PREVIEW (standards.iteh.ai)