



SLOVENSKI STANDARD
oSIST prEN ISO 4126-3:2019

01-oktober-2019

Naprave za varovanje pred visokim tlakom - 3. del: Varnostni ventili in razpočne plošče v kombinaciji (ISO/DIS 4126-3:2019)

Safety devices for protection against excessive pressure - Part 3: Safety valves and bursting disc safety devices in combination (ISO/DIS 4126-3:2019)

Sicherheitseinrichtungen gegen unzulässigen Überdruck - Teil 3: Sicherheitsventile und Berstscheibeneinrichtungen in Kombination (ISO/DIS 4126-3:2019)

Dispositifs de sécurité pour protection contre les pressions excessives - Partie 3: Soupapes de sûreté et dispositifs de sûreté à disque de rupture en combinaison (ISO/DIS 4126-3:2019)

Ta slovenski standard je istoveten z: prEN ISO 4126-3

ICS:

13.240	Varstvo pred previsokim tlakom	Protection against excessive pressure
--------	--------------------------------	---------------------------------------

oSIST prEN ISO 4126-3:2019

en

DRAFT INTERNATIONAL STANDARD

ISO/DIS 4126-3

ISO/TC 185

Secretariat: ANSI

Voting begins on:
2019-08-05Voting terminates on:
2019-10-28

Safety devices for protection against excessive pressure — Part 3: Safety valves and bursting disc safety devices in combination

*Dispositifs de sécurité pour protection contre les pressions excessives —**Partie 3: Soupapes de sûreté et dispositifs de sûreté à disque de rupture en combinaison*

ICS: 13.240

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN ISO 4126-3:2020

<https://standards.iteh.ai/catalog/standards/sist/e91372a6-75f2-4873-940b-70917557d592/sist-en-iso-4126-3-2020>

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

This document is circulated as received from the committee secretariat.

ISO/CEN PARALLEL PROCESSING



Reference number
ISO/DIS 4126-3:2019(E)

© ISO 2019

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN ISO 4126-3:2020

<https://standards.iteh.ai/catalog/standards/sist/e91372a6-75f2-4873-940b-70917557d592/sist-en-iso-4126-3-2020>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2019

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms and definitions.....	1
4 Symbols.....	4
5 Design of combination.....	4
6 Installation of combination.....	5
7 Combination performance.....	5
8 Determination of combination discharge capacity factor, F_d, by testing.....	6
8.1 General.....	6
8.2 Test requirements.....	6
8.3 Test rig.....	7
8.4 Test method.....	7
8.5 Test procedure.....	7
8.6 Acceptance criteria of the tests.....	8
8.6.1 General.....	8
8.6.2 Conditions applicable to the safety valve.....	8
8.6.3 Conditions applicable to the bursting disc safety device.....	8
8.6.4 Conditions applicable to combination.....	8
9 Derivation of combination discharge capacity factor, F_d.....	9
10 Alternative to testing for F_d.....	9
11 Certification of combination discharge capacity factor, F_d.....	9
12 Application and use of the certified combination discharge capacity factor, F_d.....	9
13 Marking and identification of combination devices.....	9
13.1 Bursting disc safety device.....	9
13.2 Safety valve.....	10
13.3 Combination.....	10
14 Documentation.....	10
15 Preparation for storage and transport.....	10
Annex ZA (informative) Relationship between this European Standard and the Essential Requirements of EU Directive 2014/68/EU (PED) aimed to be covered.....	11

ISO/DIS 4126-3:2019(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 185, *Safety devices for protection against excessive pressure*.

This second edition cancels and replaces the first edition (ISO 4126-3:2006), which has been technically revised.

The main changes compared to the previous edition are as follows:

- Throughout: Eliminated unnecessary references and definitions
- [Clause 5](#): Inlet line and pressure drop requirements from prior clause 6.2 were moved to [Clause 5](#) and a reference to ISO 4126-9 was also added.
- [Clause 7](#): Deleted specific references to specific EN standards to refer to the applicable pressure vessel standard to reflect the global nature of this standard.
- [Clause 9](#): The restrictions for F_d values less than 0,97 were eliminated.
- [Clause 12](#): Clarified the applicable minimum bursting pressure for which the F_d value can be used for sizes larger than those flow tested.
- [Clause 14](#): Added a requirement for the supplier to provide a test certificate if the F_d being used is a certified combination discharge coefficient.

A list of all parts in the ISO 4126- series can be found on the ISO website.

Introduction

Bursting disc safety devices can be used upstream of safety valves in the following cases:

- a) to protect the safety valve against corrosion, fouling or operating conditions which could affect the safety valve performance;
- b) to prevent leakage;
- c) to prevent total loss of contents from the protected equipment following the bursting of the bursting disc.

The term *combination* is used to describe the close-coupled (i.e. within 5 pipe diameters) assembly of a bursting disc safety device upstream of a safety valve or CSPRS, as defined by the part of ISO 4126. Requirements for other installation arrangements of bursting discs with safety valves or CSPRS are defined in ISO 4126-9.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN ISO 4126-3:2020

<https://standards.iteh.ai/catalog/standards/sist/e91372a6-75f2-4873-940b-70917557d592/sist-en-iso-4126-3-2020>

Safety devices for protection against excessive pressure —

Part 3:

Safety valves and bursting disc safety devices in combination

1 Scope

This part of ISO 4126 specifies only the requirements for a product assembled from the in series combination of safety valves or CSPRS (controlled safety pressure relief systems) according to ISO 4126-1, ISO 4126-4 and ISO 4126-5, and bursting disc safety devices according to ISO 4126-2 installed upstream of the valve within five pipe diameters of the valve inlet. It specifies the design, application and marking requirements for such products, composed of the bursting disc safety device, a safety valve or CSPRS and, where applicable, a connecting pipe or spool piece. In addition, it gives a method for establishing the combination discharge factor used in sizing combinations.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4126-1, *Safety devices for protection against excessive pressure — Part 1: Safety valves*

ISO 4126-2, *Safety devices for protection against excessive pressure — Part 2: Bursting disc safety devices*

ISO 4126-4, *Safety devices for protection against excessive pressure — Part 4: Pilot operated safety valves*

ISO 4126-5, *Safety devices for protection against excessive pressure — Part 5: Controlled safety pressure relief systems (CSPRS)*

ISO 4126-6, *Safety devices for protection against excessive pressure — Part 6: Application, selection and installation of bursting disc safety devices*

ISO 4126-7, *Safety devices for protection against excessive pressure — Part 7: Common data*

ISO 4126-9, *Safety devices for protection against excessive pressure — Part 9: Application and installation of safety devices excluding stand-alone bursting disc safety devices*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

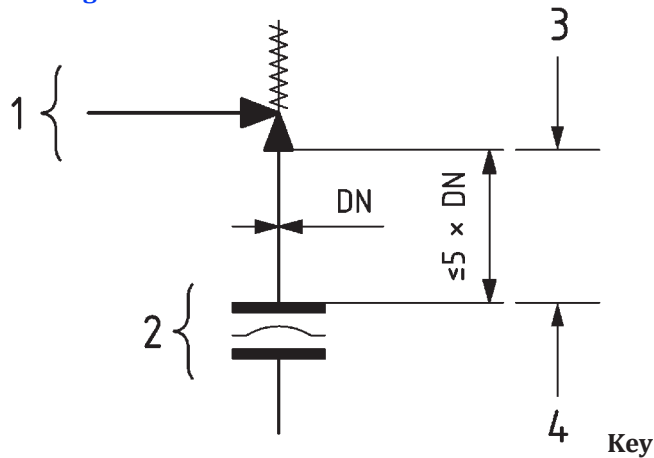
ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1 combination

installation which comprises a bursting disc safety device installed within five pipe diameters (from outlet of bursting disc holder to inlet of valve) before the inlet of a safety valve or a CSPRS

ISO/DIS 4126-3:2019(E)

SEE: [Figure 1](#).

1. safety valve or CSPRS
2. bursting disc safety device
3. safety valve or CSPRS inlet
4. bursting disc safety device outlet

NOTE Other bursting disc safety device configurations used in conjunction with safety valves or CSPRS are specified in ISO 4126-6.

Figure 1 — Diagram of combination showing relative distance

3.2

combination discharge capacity factor

F_d factor used to determine the discharge capacity of a safety valve or CSPRS when the safety valve or CSPRS is used in combination with a bursting disc safety device installed upstream of the safety valve or CSPRS

3.3

bursting disc safety device

non-reclosing pressure relief device actuated by differential pressure and designed to function by the bursting of the bursting disc(s)

Note 1 to entry: It is the complete assembly of installed components including, where appropriate, the bursting disc holder.

3.4

bursting disc assembly

complete assembly of the components installed in the bursting disc holder to perform the desired function

3.5

bursting disc

pressure-sensitive component(s) of a bursting disc safety device, designed to open by bursting at a specified bursting pressure

3.6

bursting disc holder

part of a bursting disc safety device which retains the bursting disc assembly in position